

Rendering Equation in Water Column

Shehtab Zaman
Binghamton University

January 31, 2018

1 Model

1.1 Fresnels Reflection and Transmittance

If we consider the intensity of the light detected by the sensor, L_{sensor} , we can effectively decompose the sources into two components: the reflection off of the air-water interface (air-to-air) $L_{reflected}$, and a proportion of the reflectance off of the disk underwater, $K \cdot L_{transmitted}$. Where K is determined by Rendering equation as the concentration of particulates as a parameter.

Given the ambient atmospheric light intensity, L_{atm} , by energy considerations we can say

$$L_{atm} = L_{reflected} + L_{transmitted}$$

1.1.1 Reflectance

Since the incident light is unpolarized, the reflectance is given by the average of S-polarized and P-polarized light. As an approximation for a given incident angle θ , we can use Schlick's approximation to obtain reflectance R .

$$R(\theta) = \left(\frac{n_1 - n_2}{n_1 + n_2} \right)^2 + \left(1 - \left(\frac{n_1 - n_2}{n_1 + n_2} \right)^2 \right) (1 - \cos(\theta))^5$$

where, n_1 is the index of refraction of the incident media (air in our case) and n_2 is the index of refraction of the reflected media (water = 1.33).

Since the reflectance is wavelength independent, we have,

$$L_{reflected} = R \cdot L_{atm}$$

1.1.2 Transmittance

We can relate the transmittance T of the unpolarized light with the reflectance R as

$$T = 1 - R$$

We have the transmitted light into the water as,

$$L_{transmitted} = T \cdot L_{atm}$$

The attenuation $L_{transmitted}$ due to chlorophyll absorption and reflection on the disk is discussed in the following sections.

In practice considering the reflection may be trivial as at $\theta = 0$ the maximum reflectance is $\approx 3\%$ and has a significant effect at higher incident angles only ($> 60^\circ$).

1.2 Rendering Equation

The interaction of incident, reflected, and emitted light at any given point on a given surface is described by the general Rendering Equation,

$$L_o = L_e + L_r \quad (1)$$

Where, L_o is the light leaving the particular point, L_e is the light emitted from the point (if it is a source), and L_r is the light reflected from that point.

Since we will be working with non-light generating disks, we set, $L_e = 0$. The light reflected off of the surface of a disk, can be calculated using the Bidirectional Reflectance Distribution Function (BRDF)[3]. For a given point on a surface, the general BRDF is,

$$\rho_d(\phi_0, \theta_0, \phi_f, \theta_f) = \frac{L_r \phi_f, \theta_f}{L_i \phi_0, \theta_0} \quad (2)$$

Where ϕ_0, θ_0 are the incident azimuthal and polar angle of the light source, and ϕ_f, θ_0 are the azimuthal and polar angle with respect to the viewer and reflected point.

From the general rendering equation, the reflected radiance is given by

$$L_r = \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\frac{\pi}{2}} f_r L_s T(d) \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \quad (3)$$

Where, the f_r is Lambertian BRDF.

The transmission function $T(d)$ can be related to the depth of the reflecting surface.

1.3 Beer-Lambert Law

The Beer-Lambert provides us with a linear relationship between incident light, absorbed light, and concentration of absorbed light.

The wavelength dependent relation is given as,

$$\epsilon dc = \text{Log}_{10} \frac{I_0}{I_f} \quad (4)$$

where, ϵ is the molar absorptivity in $L \cdot \text{cm}^{-1} \cdot \text{mol}^{-1}$, d is the depth in cm , C is the concentration in $\text{mol} \cdot L^{-1}$. I_0 is the initial light intensity, and I_f is the final intensity after absorption.

Given some incident light of radiance, L_0 , on the water surface,

we have the decomposed radiance as

$$L_0 = L_{sa} + L_s$$

where, L_{sa} is the absorbed light radiation. L_s is the light incident on the point under water and being reflected by the disk.

According to the Beer-Lambert Law we have the relation,

$$\text{Log}_{10} \left(\frac{L_0}{L_s} \right) = \frac{\epsilon d C}{\cos(\theta)} \quad (5)$$

and,

$$T(d) = 10^{\frac{-\epsilon d C}{\cos(\theta)}} \quad (6)$$

1.4 Reflectance

Since we want to specifically take into account the absorbance due to chlorophyll a, we limit the consideration to considering the radiance of light at $\lambda = 662\text{nm}$

Even though the incident light is polychromatic, but since we are considering the specific wavelength and the incident light is so spread out, we can reasonably treat it as monochromatic. (?)

The reflectance in the particular frequency then becomes,

$$L_{r\lambda} = \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\theta_c} f_r L_{s\lambda} 10^{\frac{-\epsilon d C}{\cos(\theta)}} \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \quad (7)$$

Here we sum the incident angle upto some cutoff angle θ_c , as the higher incident lights have negligible effect on the reflected light.

We can further make an assumption that the secchi disk is perfectly matte with rotationally invariant reflectance. The Lambertian BRDF is thus,

$$f_r = \frac{\rho_D}{\pi} \quad (8)$$

Where, ρ_D is the albedo of the secchi disk with $0 \leq \rho_D \leq 1$ Combining (4) and (5) we get the reflectance off of the surface of secchi disk as,

$$L_{r\lambda} = \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\theta_c} \frac{\rho_D}{\pi} L_{s\lambda} 10^{\frac{-\epsilon d C}{\cos(\theta)}} \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \quad (9)$$

Chlorophyll a has an extinction coefficient of $\epsilon_{663} = 0.088 \frac{cm^{-1}}{g}$ at 663nm. Since the light collected by the camera will have had to travel up the water column we must add another absorbance factor determined by the equation 2.

The light incident on the camera is therefore,

$$L_{i663} = \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\theta_c} \frac{\rho_D}{\pi} L_{s663} 10^{\frac{-2\epsilon d C}{\cos(\theta)}} \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \quad (10)$$

1.5 Analytic Solution

1.5.1 At High Cutoff Angles

At high cutoff angles $\theta_c > 60^\circ$, we can reasonably account for reflectance off of the water surface to be sufficiently low ($\leq 3\%$). The correction to the incident is sufficiently low and can be discounted.

Equation (10) can be solved analytically to the first order approximation of the taylor expansion of $10^{\frac{-2\epsilon d C}{\cos(\theta)}}$, for a light source which is at angle θ_0 to θ_c . The concentration of the chlorophyll, c , can be retrieved by,

$$C = \text{Log}_{10} \left[\int_{\theta_0}^{\theta_c} \int_0^{2\pi} \frac{\rho_D}{\pi} \frac{L_{s663}}{L_{i663}} 10^{-2\epsilon d} \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \right] \quad (11)$$

$$= \text{Log}_{10} \left[2\rho_D 10^{-2\epsilon d} \frac{L_{s663}}{L_{i663}} \int_{\theta_0}^{\theta_c} \cos(\theta_i) \sin(\theta_i) d\theta_i \right] \quad (12)$$

$$= \text{Log}_{10} \left[2\rho_D 10^{-2\epsilon d} \frac{L_{s663}}{L_{i663}} \left(\frac{-\cos(2\theta_i)}{4} \Big|_{\theta_0}^{\theta_c} \right) \right] \quad (13)$$

Notice that as $d \leftarrow 0$ the equation reduces to a function of incident angle and properties of the material and will correspond to the concentration $C \leftarrow 0$. The coupling of ϵ and d also shows that in a particulate free medium ($\epsilon = 0$), the reflectance is affected by the depth d and is analogous to the case where $d = 0$ for any depth.

In this case, θ_c is less than the $\frac{\pi}{3}$ so we can assume the difference transmitted intensity is the same as the incident atmospheric intensity. The addition of higher incident angles would make equation unsolvable analytically (But I believe we can approximate using perturbation theory).

The cutoff angle should ideally vary with the azimuthal position of the sun, time of day and the latitude of position.

1.6 Possible Concerns

- The issues with non-constant air-water interface (waves) is that both the incident light intensity and reflected light intensity can vary dramatically over the surface of the secchi disk and result in patches of high reflectance and distorted disk image. Imposing a periodic boundary condition, by defining the water surface as a plane wave could be a better approximation. There would be a significant increase in calculation complexity in that case.
- Another significant omission is back scattering from the reflected light, being reflected back onto the disk. (For an approximation, I believe the correction due to this would be marginal, but I have to carry out a sample calculation to have a concrete value).

2 Sensor Baseline

2.1 Compensating for Exposure

2.1.1 Aperture and Intensity

The aperture, measured in f-stops, is the opening of the camera sensor. The f-stop measures the amount of sensor surface open to collect photons. Larger apertures create a smaller depth of field (should be considered when deciding on the baseline).

The intensity of the incident light is inversely proportional to the square of the f-number.

$$I \propto \frac{1}{f^2}$$

2.1.2 Shutter Speed and Intensity

We can assume that the shutter speed (how long the sensor collects photons), is inversely proportional to the measured intensity.

$$I \propto \frac{1}{T}$$

2.1.3 Pixel values

If the pixel value is an estimate of the power per solid angle per area of the sensor, we can combine the shutter speed and aperture relations as

$$I \propto \frac{1}{T \cdot f^2}$$

3 Wavelength Intensity

The raw data obtained from the camera provides us with the three values in the R,G,B channels per pixel (see Mathematica for example). Given a specific wavelength, λ , we want to obtain the intensity at that wavelength.

3.1 Spectral Sensitivity Function

Given constant ISO and aperture, at each wavelength, λ , the spectral sensitivity in RGB channels is calculated by

$$c(\lambda) = \frac{d(\lambda)}{r(\lambda)t(\lambda)}$$

where, $r(\lambda)$ is the radiance. $t(\lambda)$ is the exposure time. $d(\lambda)$ is the data.

Therefore radiance at a wavelength would be,

$$r(\lambda) = \frac{d(\lambda)}{c(\lambda)t'(\lambda, f)}$$

with $t'(\lambda)$ is a function of the wavelength and aperture as well.


4 Experiment

4.1 Set Up

Using a lamp as a point source, we can measure the efficacy of the model. The set up for the experiment is with a secchi disk positioned submerged at depth d , in a solution of water and particulates - possible food coloring or something similar- with known absorption coefficients ϵ . We can use a lamp as the point source of light. Placing the lamp at height H above the secchi disk, at an angle θ_a .


5 Numerical Simulations

Carrying out a simplistic modelling of the rendering equation with the secchi disk albedo, $\rho_d = 1$, we can carry out the model the intensity percent ratio of reflected light absorbed by the camera and incident light on the submerged secchi disk, $\frac{L_{r663}}{L_{i663}}$ with,

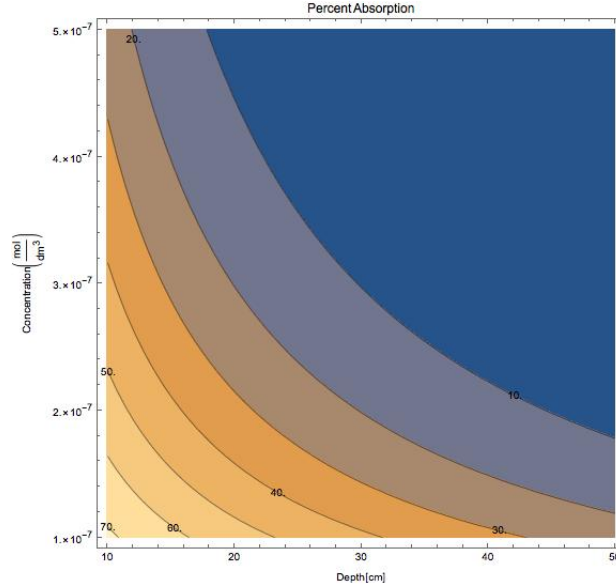


The concentration ranges from $1 \cdot 10^{-7} \text{ mol} \cdot \text{L}^{-1}$ to $5 \cdot 10^{-7} \text{ mol} \cdot \text{L}^{-1}$. The depth being modeled range from 10 cm to 50 cm

Holding the concentration constant at $1 \cdot 10^{-7} \text{ mol} \cdot \text{L}^{-1}$, we can model the relationship between $\frac{L_{r663}}{L_{i663}}$ and depth.

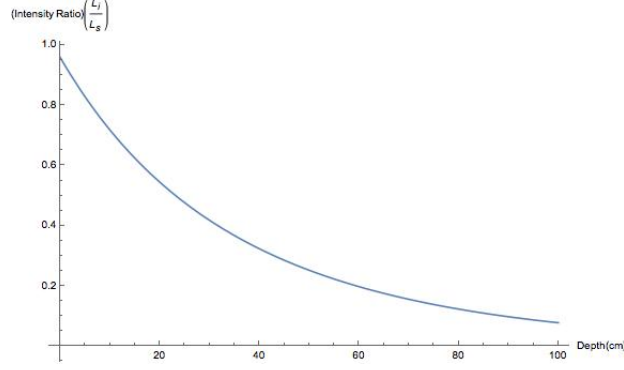

Following the same procedure as before, keeping the depth constant at 20cm , we have the relationship between the concentration and intensity ratio ($\frac{L_{r663}}{L_{i663}}$).

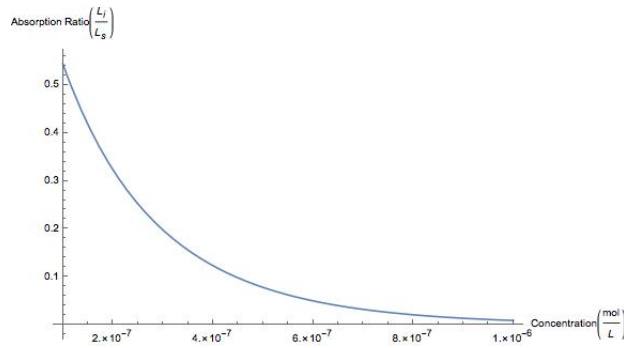

The simulations were carried out with numerical approximations in mathematica and the cutoff angle used was $\frac{\pi}{2.1}$. ($\frac{\pi}{2}$ creates a discontinuity in the integrand)

6 Appendix

6.1 Concentration Function calculation

The taylor expansion of $10^{\frac{-2\epsilon dC}{\cos(\theta)}}$ is given by

$$10^{\frac{-2\epsilon dC}{\cos(\theta)}} = 10^{-2\epsilon dC} - 10^{-2\epsilon dC} \epsilon dC x^2 \ln(10)$$

We can use the taylor expansion to solve for rendering equation analytically up to the second order,

$$\begin{aligned} L_{i663} &= \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\theta_c} \frac{\rho_D}{\pi} L_{s663} 10^{\frac{-2\epsilon dC}{\cos(\theta)}} \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \\ &= \int_{\phi_i=0}^{2\pi} \int_{\theta_i=0}^{\theta_c} \frac{\rho_D}{\pi} L_{s663} (10^{-2\epsilon dC} - 10^{-2\epsilon dC} \epsilon dC \theta_i^2 \ln(10)) \cos(\theta_i) \sin(\theta_i) d\theta_i d\phi_i \\ &= \int_{\theta_i=0}^{\theta_c} 2\rho_D L_{s663} (10^{-2\epsilon dC} - 10^{-2\epsilon dC} \epsilon dC \theta_i^2 \ln(10)) \cos(\theta_i) \sin(\theta_i) d\theta_i \\ &= 2\rho_D L_{s663} 10^{-2\epsilon dC} \left(\int_{\theta_i=0}^{\theta_c} \cos(\theta_i) \sin(\theta_i) d\theta_i - \epsilon dC \ln(10) \int_{\theta_i=0}^{\theta_c} \theta_i^2 \cos(\theta_i) \sin(\theta_i) d\theta_i \right) \\ &= 2\rho_D L_{s663} 10^{-2\epsilon dC} \left(\left. \frac{-\cos^2(\theta_i)}{2} \right|_{\theta_0}^{\theta_c} - (\epsilon dC \ln(10)) \frac{2\theta_i \sin(2\theta_i) + (1 - 2\theta_i^2) \cos(2\theta_i)}{8} \right|_{\theta_0}^{\theta_c} \end{aligned}$$

We can solve for the concentration analytically as well.

$$L_{i663} = 2\rho_D L_{s663} 10^{-2\epsilon d C} (k - Cq)$$

$$\begin{aligned} \frac{L_{i663}}{2\rho_D L_{s663}} &= 10^{2\epsilon d C} (k - Cq) \\ \ln\left(\frac{L_{i663}}{2\rho_D L_{s663}}\right) &= \epsilon d C \cdot \ln(10^{-2}) + \ln(k - Cq) \\ \ln\left(\frac{L_{i663}}{2\rho_D L_{s663}}\right) + k - 1 &= C \\ \frac{\ln\left(\frac{L_{i663} 10^{2\epsilon d}}{2\rho_D L_{s663}}\right) + k - 1}{q - \ln(10)} &= C \end{aligned}$$

7 Notes/Definitions

Radiance: Radiant power per unit foreshortened area per unit solid angle. "throughput for light given point in a given direction" [3]

Irradiance: Incident power per unit area. (Light incident on surface or point)

Bidirectional Reflectance Distribution Function (BRDF): The ratio of irradiance and radiance on a surface.

8 References

- [1] Harold H. Strain, Mary R. Thomas, Joseph J. Katz, Spectral absorption properties of ordinary and fully deuteriated chlorophylls a and b, In Biochimica et Biophysica Acta, Volume 75, 1963, Pages 306-311, ISSN 0006-3002, [https://doi.org/10.1016/0006-3002\(63\)90617-6](https://doi.org/10.1016/0006-3002(63)90617-6).
- [2] <https://www.cs.princeton.edu/~smr/cs348c-97/surveypaper.html>
- [3] <https://www2.cs.arizona.edu/classes/cs433/fall08/lectures/BRDFandGlobalIllum.pdf>
- [4] Beer-Lambert Law (<http://life.nthu.edu.tw/~labcyjw/BioPhyChem/Spectroscopy/beerslaw.htm>)
- [5] Incomplete Gamma Function (http://people.math.sfu.ca/~cbm/aands/page_260.htm)