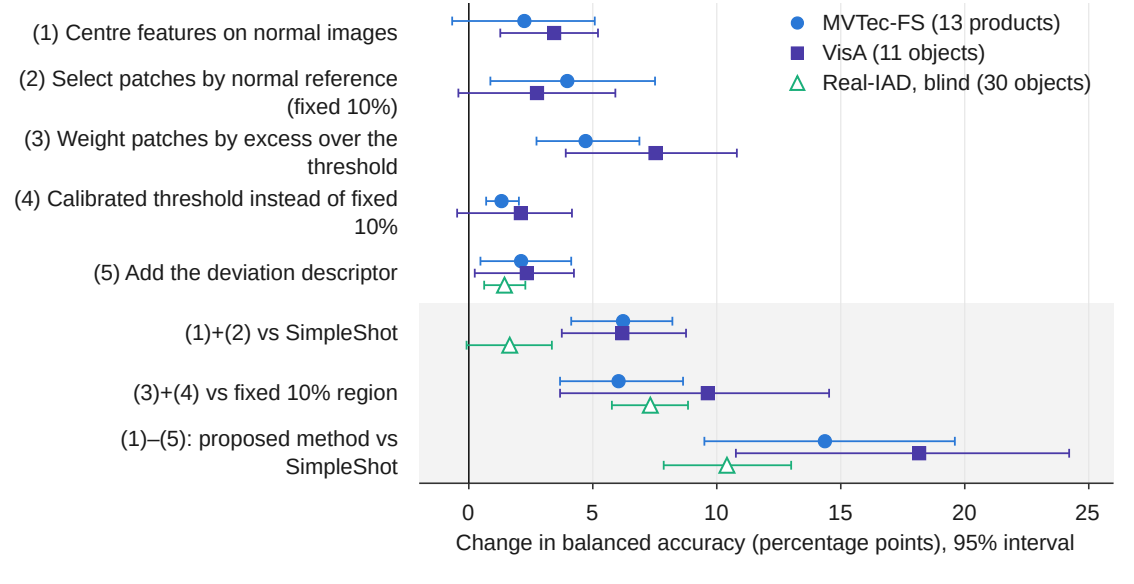
(1) Centre features on normal images
(2) Select patches by normal reference (fixed 10%)
(3) Weight patches by excess over the threshold
(4) Calibrated threshold instead of fixed 10%
(5) Add the deviation descriptor
(1)+(2) vs SimpleShot
(3)+(4) vs fixed 10% region
(1)–(5): proposed method vs SimpleShot
MVTec-FS (13 products)
VisA (11 objects)
Real-IAD, blind (30 objects)
0
5
10
15
20
25
Change in balanced accuracy (percentage points), 95% interval