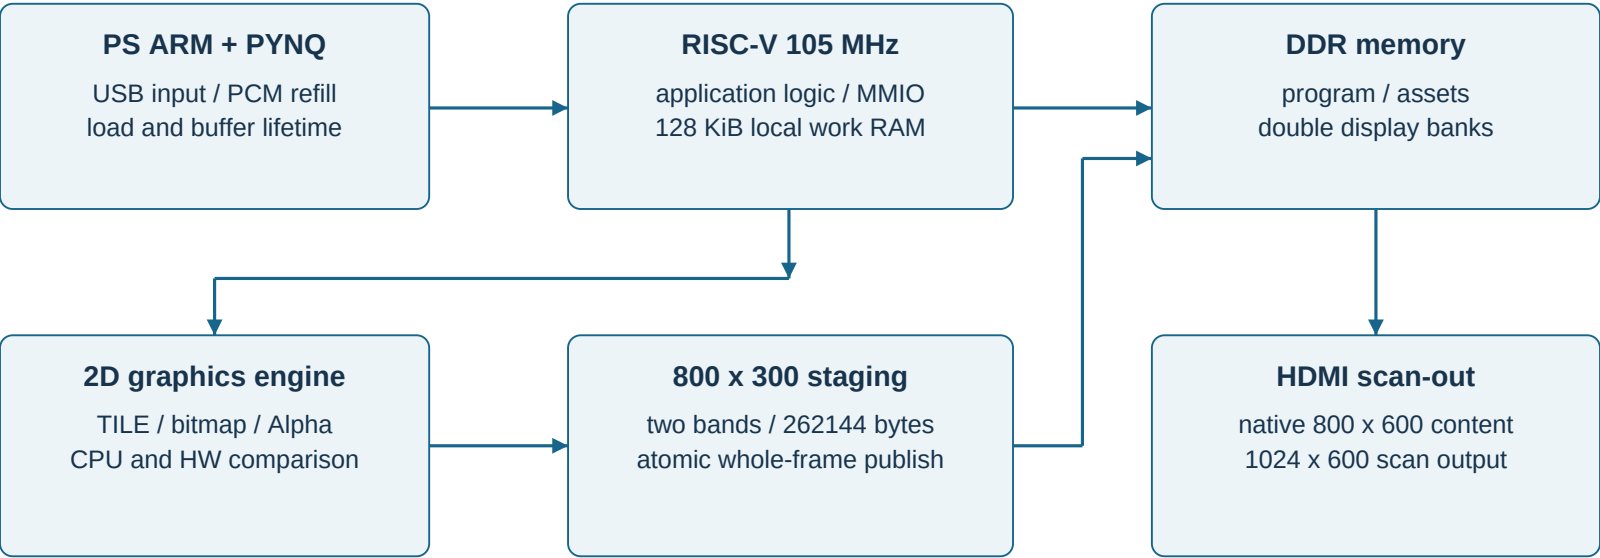

64 KiB read cache + 4 KiB instruction buffer; HP1 copies bands to DDR

Audio uses PS PCM refill and PL APU / I2S, separate from the display path