# **Computational Social Science**

### Introduction to Natural Language Processing I

Dr. Thomas Davidson

Rutgers University

February 28, 2022

### Plan

- 1. Course updates
- 2. What is NLP?
- 3. Preprocessing texts and the bag-of-words representation

### **Course updates**

- ► Homework 2 due Friday at 5pm
  - Submit homework via Github
- Project proposals due next week
  - ▶ Identify a suitable topic, data, and plan for analysis

#### What is natural language processing?


- ► Three components of NLP\*:
  - Natural language / "text as data"
    - A corpus of text (e.g. books, reviews, tweets, e-mails)
  - ► (Computational) linguistics
    - Linguistic theory to guide analysis and computational approaches to handle data
  - Statistics
    - Statistical methods to make inferences

<sup>\*</sup>Not that NLP: https://en.wikipedia.org/wiki/Neuro-linguistic\_programming

### NLP tasks: Part-of-speech tagging



#### **NLP** tasks: Dependency-parsing



#### NLP tasks: Co-reference resolution

CorefEntity8

Thomas Davidson an Assistant Professor of Sociology at Rutgers University in New Brunswick , New Jersey .


#### CorefEntity8

He currently teaches Computational Sociology at Rutgers

#### **NLP** tasks: Named-entity recognition




#### **Applications: Power dynamics**



Danescu-Niculescu-Mizil, Cristian, Lillian Lee, Bo Pang, and Jon Kleinberg. 2012. "Echoes of Power: Language Effects and Power Differences in Social Interaction." In Proceedings of the 21st International Conference on World Wide Web, 699–708. ACM. http://dl.acm.org/citation.cfm?id=21817931.

### Applications: Identity and group membership



(c) Adoption of lexical innovations

Danescu-Niculescu-Mizil, Cristian, Robert West, Dan Jurafsky, Jure Leskovec, and Christopher Potts. 2013. "No Country for Old Members: User Lifecycle and Linguistic Change in Online Communities." In Proceedings of the 22nd International Conference on World Wide Web, 307–18. ACM. http://dl.acm.org/citation.cfm?id=2488416.

### **Applications: Trust and betrayal**




Figure 3: Friendships that will end in betrayal are imbalanced. The eventual betrayer is more positive, more polite, but plans less than the victim. The white bars correspond to matched lasting friendships, where the roles of potential betrayer and victim are arbitrarily assigned; in these cases, the imbalances disappear. Error bars mark bootstrapped standard errors (Efron, 1979).

Niculae, Vlad, Srijan Kumar, Jordan Boyd-Graber, and Cristian Danescu-Niculescu-Mizil. 2015. "Linguistic Harbingers of Betrayal: A Case Study on an Online Strategy Game." In Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing. Beijing. China: ACL. http://arxiv.org/abs/1506.04744.

#### Text as data

#### Table 1 Four principles of quantitative text analysis

- (1) All quantitative models of language are wrong—but some are useful.
- (2) Quantitative methods for text amplify resources and augment humans.
- (3) There is no globally best method for automated text analysis.
- (4) Validate, Validate, Validate.
- ▶ Justin Grimmer and Brandon Stewart, 2013

"Computational approaches are sometimes less subtle and deep than the reading of a skillful analyst, who interprets text in context. Nevertheless, ... recent advances in NLP and ML are being used to enhance qualitative analysis in two ways. First, supervised ML prediction tools can "learn" and reliably extend many sociologically interesting textual classifications to massive text samples far beyond human capacity to read, curate, and code. Second, unsupervised ML approaches can "discover" unnoticed, surprising regularities in these massive samples of text that may merit sociological consideration and theorization." - James Evans and Pedro Aceves, 2016

#### **NLP** class timeline

- ▶ Week 7
  - ▶ Pre-processing, bag-of-words, and the vector-space model
- Week 8
  - Word embeddings
- ► Week 9 (after spring break)
  - Topic models
- Week 11 (Week 10 introduces machine learning)
  - Supervised text classification

### **Pre-processing**

- There are several steps we need to take to "clean" or "pre-process" texts for analysis
  - Tokenization
  - Stemming/lemmatization
  - Stop-word removal
  - Handling punctuation and special characters

#### **Tokenization**

- Tokenization is the process of splitting a document into words
  - e.g. "Cognito, ergo sum"  $\Rightarrow$  ("Cognito,", "ergo", "sum")
- ▶ In English this is pretty trivial, we just split using white-space
- ► Tokenization is more difficult in languages like Mandarin
  - It requires more complex parsing to understand grammatical structures

### **Stemming/lemmatization**

- We often want to reduce sparsity by reducing words to a common root
  - ▶ e.g. ("school", schools", "schooling", "schooled") ⇒ "school"
- Stemming is a simple, heuristic-based approach
- Lemmatization is a more rigorous approach based on morhology, but is more computationally-intensive and often unnecessary

#### Stop-word removal

- Stop-words are frequently occurring words that are often removed
- ► The intuition is that they add little meaning and do not help us to distinguish between documents
  - e.g. Virtually all texts in English will contain the words "and", "the", "of", etc.
- Most NLP packages have lists of stop-words to easily facilitate removal.

#### Handling punctution and special characters

- ▶ In many cases we may want to remove punctuation and other special characters (e.g. HTML, unicode)
  - This is often done using regular expressions
  - Words are typically set to lowercase

#### Pre-process with caution!

- ► Researchers often apply these techniques before starting an analysis, but it may affect our results\*
  - ► There is no one-size-fits-all solution, so think carefully before removing anything
  - It's often useful to experiment to see if pre-processing steps affect results

#### Pre-process with caution!




Figure 2. Plot depicting the optimal number of topics (as selected via perplexity) for each of 64 preprocessing specifications not including trigrams. On the x-axis is the number of preprocessing steps, and the y-axis is the number of topics. Each point is labeled according to its specification.

Denny, Matthew J., and Arthur Spirling. 2018. "Text Preprocessing For Unsupervised Learning" Political Analysis 26 (02): 168–89. https://doi.org/10.1017/pan.2017.44.


#### Word counts

Now we have done some pre-processing, one of the most basic ways we can start to analyze tests is by counting the frequency of words.

```
e.g. "I think, therefore I am" \Rightarrow Word Count I 2 think 1 therefore I am 1
```

#### Frequency distributions

- ➤ Zipf's law: A word's frequency is inversely proportional to its rank order in the frequency distribution.
  - "the" is the most common word in the English language, accounting for 7% of all words in the Brown Corpus of American English
  - "and" and "of" compete for second place, each accounting for ~3.5% of words in the corpus
  - ► The most frequent 135 words account for approximately half the 1 million words in the corpus
  - Around 50,000 words, representing half the total unique words in the corpus, are hapax legomena, words which only occur once



A plot of the rank versus frequency for the first 10 million words in 30 Wikipedias (dumps from October 2015) in a log-log scale (Source: Wikipedia).

#### **Bag-of-words**

- Documents are often treated as "bags of words", i.e. we treat a document as a collection of words without retaining information about the order
  - ▶ e.g. "This is a document" ⇒ ("document", "This", "a", "is")

#### **Example: Loading data**

```
library(tidyverse)
library(gutenbergr)

ef <- gutenberg_download(41360) # Download Elementary Forms
cm <- gutenberg_download(61) # Download Communist Manifesto

ef$title <- "Elementary Forms"
cm$title <- "Communist Manifesto"

texts <- bind_rows(ef, cm)
write_csv(texts, "marxdurkheim.csv")</pre>
```

In this example, each text is represented as a table, where the first column is the ID in the Project Gutenberg database and the text field contains each sentence as a new row.

```
print(tail(texts$text))

## [1] "Let the ruling classes tremble at a Communistic revolution."

## [2] "The proletarians have nothing to lose but their chains."

## [3] "They have a world to win."

## [4] ""

## [5] ""

## [6] " WORKING MEN OF ALL COUNTRIES, UNITE!"
```


#### Tokenizing using tidytext

We are going to be using the tidytext package to conduct our analyses. The unnest tokens function is used to tokenize the text. resulting in a table containing the original book ID and each token as a separate row.


```
tidy.text <- texts %>% unnest_tokens(word, text)
tail(tidy.text$word)
## [1] "working"
                                "of"
                                            "all"
                   "men"
```

```
"countries" "uni
```

10 most frequent terms in The Communist Manifesto

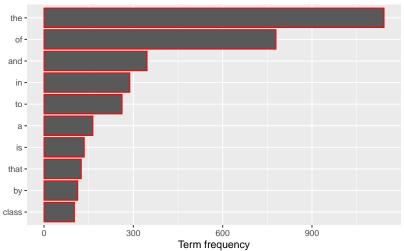

10 most frequent terms in The Elementary Forms of Religious Life

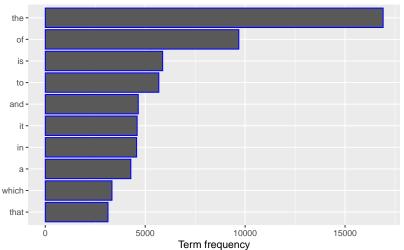


#### Removing stopwords


We can load a corpus of stop words contained in tidytext and use anti\_join to filter our texts. This retains all records without a match in stopwords.

```
data(stop_words)
head(stop_words)
## # A tibble: 6 x 2
## word lexicon
## <chr> <chr>
## 1 a
            SMART
## 2 a's SMART
## 3 able
            SMART
## 4 about SMART
## 5 above
             SMART
## 6 according SMART
tidy.text <- tidy.text %>%
 anti join(stop words)
```

#### 10 most frequent terms in The Communist Manifesto

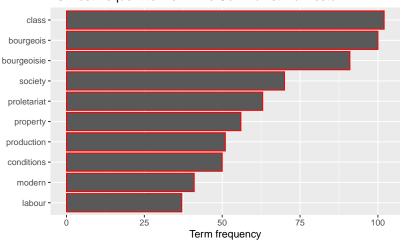

10 most frequent terms in The Elementary Forms of Religious Life

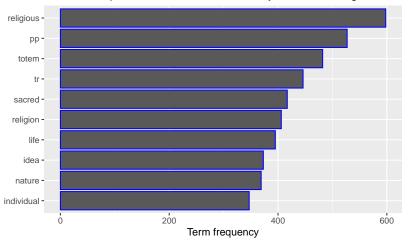


Stopwords removed

The last example shows how there is still some "junk" in the Durkheim text. We can try to remove this by adding to our stopword list.

```
to.remove <- tibble(text=c("pp", "tr")) %>% unnest_tokens(word, text)
tidy.text <- tidy.text %>%
  anti_join(to.remove)
```

10 most frequent terms in The Elementary Forms of Religious Life

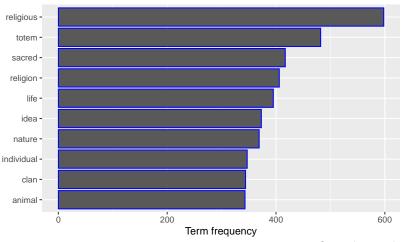

Stopwords removed+

#### **Stemming**


We can stem the terms using a function from the package SnowballC, which is a wrapper for a commonly used stemmer called the Porter Stemmer, written in C.

```
library(SnowballC)
```

```
tidy.text <- tidy.text %>% mutate_at("word", funs(wordStem((.), languag
```

Stemmer solution from https://cbail.github.io/SICSS\_Basic\_Text\_Analysis.html. See for more info on stemming and lemmatizing in R.

10 most frequent terms in The Elementary Forms of Religious Life

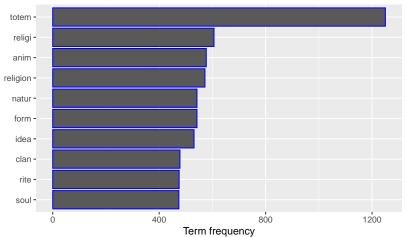


Stopwords removed+, stemmed

Let's get counts of words across both texts to analyze their distribution.


```
# Count words by text
text.words <- tidy.text %>% count(title, word, sort = TRUE)
# Get total number of words in each text
total.words <- text.words %>% group_by(title) %>%
  summarize(total = sum(n))
# Merge
words <- left join(text.words, total.words)</pre>
head(words)
## # A tibble: 6 x 4
## title
                  word n total
## <chr>
                  <chr> <int> <int> <int>
## 1 Elementary Forms totem 1250 78851
## 2 Elementary Forms religi 606 78851
```

577 78851

## 3 Flementary Forms anim

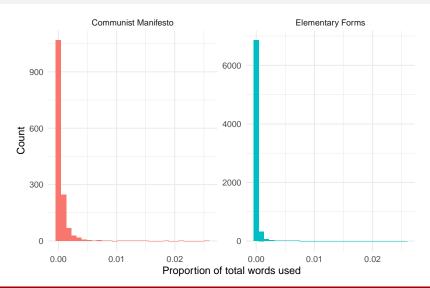

Calculating rank and frequency for each word in each text.

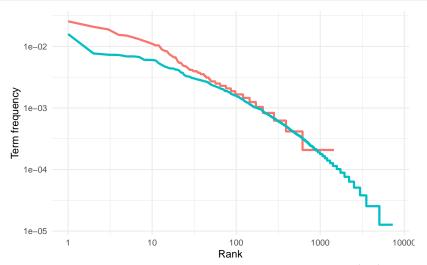

#### **N**-grams

- So far we have just considered treating a text as a "bag-of-words"
- One way to maintain some information about word order (and hence syntax) is to use N-grams
- ► An *N-gram*\* is a sequence of *N* words
- We often split texts into N-grams to capture basic syntactic units like phrases
  - N is usually small.
    - N = 2 is called a "bigram"; N = 3 is a "trigram"
  - e.g. "I like peanut butter" contains the following bigrams: "I like", "like peanut", & "peanut butter".

<sup>\*</sup>Nothing to do with Scientology https://en.wikipedia.org/wiki/Engram\_(Dianetics)

### **N**-grams

- We can also use character N-grams to split documents into sequences of characters
  - e.g. "character" can be split into the following triplets ("cha", "har", "ara", "rac", "act", "cte", "ter")
- Some recent approaches like BERT combine both character and word N-grams into "word pieces".
  - ► This makes it easy to tokenize new documents since we can always represent them as characters if a word is not in our vocabulary


### **Trigams**

Modify unnest\_tokens to construct trigrams.

```
## # A tibble: 6 x 3
##
    gutenberg_id title
                                  word
##
           <int> <chr>
                                  <chr>>
## 1
           41360 Elementary Forms the elementary forms
## 2
           41360 Elementary Forms elementary forms of
## 3
           41360 Elementary Forms forms of the
## 4
           41360 Elementary Forms of the religious
## 5
           41360 Elementary Forms the religious life
## 6
           41360 Elementary Forms _the elementary forms
```


### **Trigrams**

#### 10 most frequent trigrams in The Communist Manifesto

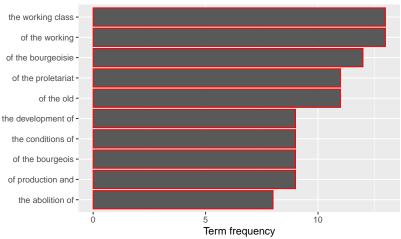

### **Trigrams**

#### 10 most frequent trigrams in The Elementary Forms of Religi

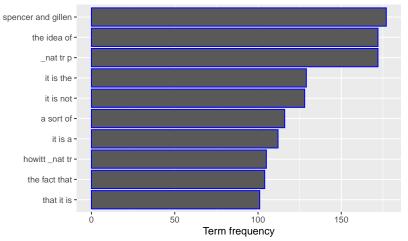

Stopwords removed+, stemmed

### **Next lecture**

- ► The vector-space model
- ► Text similarity measures