

DATABASE CONCEPTS:

SKIP TO SQL IF YOU ALREADY KNOW DATABASE CONCEPTS

EXTENDED READING FOR DATABASE CONCEPTS:

https://cbseacademic.nic.in/web_material/doc/cs/2_Computer_Science_Python_ClassXII.pdf

DATABASE

Database is a collection of related information that is organized in such a way that it supports for easy access, modification and maintenance

Examples of database: Ms-Access, MySQL, PostgreSQL, SQLite, Microsoft SQL Server, Oracle, SAP, dBASE, FoxPro, etc..

RELATION:

In database, a relation means a 'table', in which data are organized in the form of rows and columns.

DOMAIN:

A domain is a **set of acceptable values of a particular column**, which is based on various properties and data types.

Ad No	Name	Gender	Marital Status	SUBJECT
101	A	MALE	UNMARRIED	MATH
105	B	FEMALE	MARRIED	PHYSICS
203	C	MALE	DIVORCED	CHEMSITRY
205	D	FEMALE	WIDOW	COMPUTER SCIENCE

For example:

(i) The domain of gender column has a set of two possible values i.e, **Male or Female**.

(ii) The domain of marital status has a set of four possible values i.e, **Married, Unmarried, Widows and Divorced**

** (iii) The domain of subject has a **set of five possible** values i.e., **Math's,physics,chemistry,computer science and English**

TUPLE:

Horizontal subset/information in a table is called tuple. The tuple is also known as a 'record', which gives particular information of the relation

For example:

(i) In customer table, one row gives information about one customer only.

(ii) In student table, one row gives information about one student only.

KEY:

Key is of **four types**:

(i) **Primary Key**

(ii) **Candidate Key**

(iii) **Foreign Key**

(iv) **Alternate Key**

Primary Key:

A column or **set of columns** that uniquely identifies a row within a table is called primary key.

PRIMARY KEY ---> THIS IS SERVES AS AN UNIQUE IDENTIFIER

---> TWO PERSON CAN HAVE SAME NAME BUT THEY CAN'T HAVE SAME FINGERPRINT

---> HERE FINGERPRINT SERVES THE PURPOSE OF PRIMARY KEY

---> IN TABLE WE MUST HAVE A PRIMARY KEY TO UNIQUELY IDENTIFY A RECORDS IN A TABLE

id	name	gender
2	sam	male
1	ram	female
3	ram	male

TABLE NAME: GENDER

IN THE TABLE GENDER WE CAN SELECT id HAS PRIMARY KEY AS IT ONLY HAS UNIQUE RECORDS. WE CAN'T USE NAME AND GENDER AS PRIMARY KEY AS TWO PERSON



Candidate Key:

Candidate keys are set of fields (columns with unique values) in the relation that are eligible to act as a primary key.

Candidate key = Collection of Primary key

Alternate Key:

Out of the candidate keys, after selecting a key as primary key, the remaining keys are called alternate key.

Alternate Key = Candidate key - Primary key

Foreign Key:

A foreign key is a field (or collection of fields) in one table that **uniquely identifies a row of another table**. In other words, a foreign key is a column or a combination of columns that is used to **establish a link between two tables**.

#FOREIGN KEY CONSTARINT

#FOREIGN KEY IS LIKE PRIMARY KEY. IT IS USED IN RDBMS.

#SO FAR WE HAVE ONLY SEE DBMS.

DBMS ---> Database Management System

RDBMS ----> Relational Database Management System

IN RDBMS TABLES ARE IN RELATION WITH EACH OTHER BUT IN DBMS TABLES ARE NOT IN RELATION WITH EACH OTHER.

DBMS

DATABSSE NAME: RDBMS

id	name	age
1	ram	10
2	sam	20
3	ram	30

TABLE NAME: AGE

id	name	gender
2	sam	male
1	ram	female
3	ram	male

TABLE NAME: GENDER

AS YOU CAN SEE BOTH THE TABELS ARE RELATED TO EACH OTHER BY THE ID COLOUMN

id column in table AGE is called the primary key and id in table GENDER is called primary key

id column is called as the foreign key as it is used to relate the two tables AGE AND GENDER.

WE can even choose the gender column as the primary key but we can''t choose it as foreign key as it is not present in the age table.

DATABASE DBMS:

weight	name	age
40	ram	10
50	sam	male
60	ram	male

TABLE NAME: AGE

id	name	gender
2	sam	male
1	ram	female
3	ram	male

TABLE NAME: GENDER

TWO TABLES ARE NOT RELATED TO EACH OTHER SO IT IS CALLED AS DBMS

Degree:

The number of attributes(fields)(column) in a table

Degree ---> no of columns

Cardinality:


The number of tuple(record)(rows) in a table

Cardinality ---> no of rows


Candidate Key: AdNo and Name has unique values.

Primary Key: Out of the AdNo and Name, AdNo is the primary key.

Alternate Key: In the candidate key, AdNo is the primary key and the Name is the Alternate key.

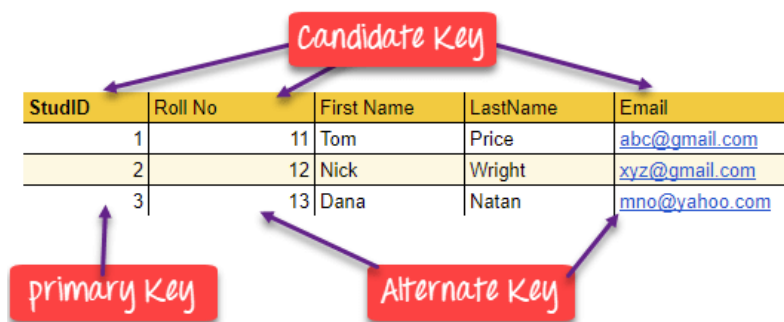

SOURCE:www.guru99.com

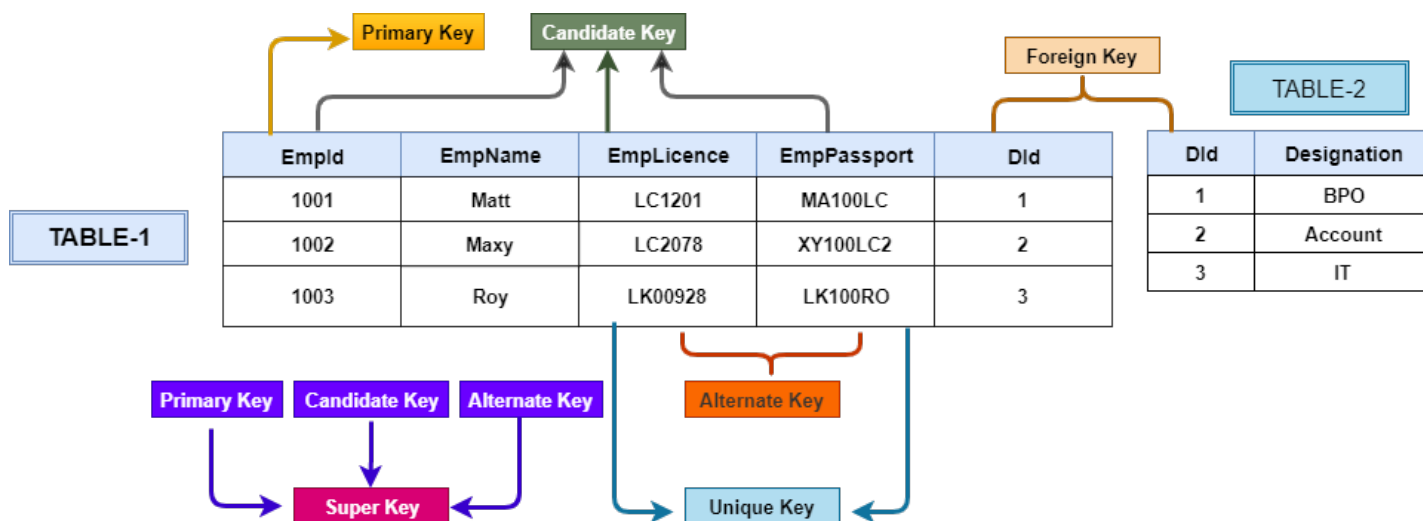

SOURCE: powerbidocs.com

Resources:

<https://powerbidocs.com/2019/12/25/sql-keys/>

Advantages of SQL:

- (i) SQL is portable
- (ii) High Speed
- (iii) Easy to learn
- (iv) SQL is used with any DBMS system with any vendor: SSQL is used for relational databases: SQL is widely used for relational databases.
- (v) SQL acts as both programming language and interactive language:
- (vi) Client/Server language:
- (vii) Supports object based programming

SOME MYSQL SQL ELEMENTS:

(i) Literals(have fixed value):

```
numeric literal --> 53 ,64

string literal ---> "abc"

real literals ---> 17.0 , 17.5
```

(ii) Data Types:

(I) Numeric :

(I) Number:

```sql; Number:

Positive numbers in the range  $1 \times 10^{-130}$  to  $9.99...9 \times 10^{125}$  with up to 38 significant digits.

Negative numbers from  $-1 \times 10^{-130}$  to  $9.99...99 \times 10^{125}$  with up to 38 significant digits. Zero.

```
(II) Decimal/Float:
```

DECIMAL[ (p [, s])]

– 'p' is the precision or the total number of significant decimal digits, where the most significant digit is the left-most nonzero digit and the least significant digit is the right-most known digit.

– 's' is the scale or the number of digits from the decimal point to the least significant digit.

```
(III) INT/INTERGER
```

```
(IV) FLOAT
```

```
(ii) CHARACTER OR STRING:
```

```
```sql
```

CHAR(10) has fixed length, right padded with spaces.

VARCHAR(10) has fixed length, right padded with NULL

VARCHAR2(10) has variable length.

the difference between VARCHAR and VARCHAR2 is that VARCHAR is ANSI standard but takes up space for variables, whereas the VARCHAR2 is used only in Oracle but makes more efficient use of space.

(III) DAT AND TIME:

```
DATE: YYYY-MM-DD -> 2021-01-01
```

```
DATETIME: YYYY-MM-DD HH:MM:SS 2021-01-01 10:10:10
```

```
TIME: HH:MM:SS 11:59:10
```

```
YEAR:
```

```
-> YEAR(2) -> 2-digit format(21)
```

```
-> YEAR(4) -> 4-digit format(2021)
```

```
TIMESTAMP: (YYYYMMDDHHMMSS) --> 20210101060510
```

TYPES OF SQL STATEMENTS

**(i)Data Definition Language **(DDL) statement:

DDL statements are used to **create structure of a table, modify the existing structure of the table and remove the existing table**. Some of the DDL statements are CREATE TABLE, ALTER TABLE and DROP TABLE.

Grant and revoke privileges and roles and maintenance commands

(ii) Data Manipulation Language (DML) statement:

Data Manipulation Language (DML) statements are used to **access and manipulate data in existing tables**. The manipulation includes **inserting data into tables, deleting data from the tables, retrieving data and modifying the existing data**. The common DML statements are SELECT, UPDATE, DELETE and INSERT.

(iii) Transaction Control Language (TCL) Commands:

COMMIT, ROLLBACK, SAVEPOINT, SET TRANSACTION

(iv) Session Control Commands

(v) System Control Commands

SQL

(Structured Query Language is a standard language used for accessing databases)

(ALL THE SQL COMMANDS WHICH ARE LISTED BELOW ARE COMPITABLE WITH MySQL)

MySQL :<https://dev.mysql.com/doc/>

SQL Server:<https://docs.microsoft.com/en-us/sql/sql-server/?view=sql-server-ver15>)

- *SQL IS CASE INSENSITIVE*
-

Consider

Name of the table --> records

s.no	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30

TABLE CREATION COMMANDS:

DATATYPES:

```
char() varchar() integer() decimal() '2001-12-30'
char varchar integer decimal NUMBER()
```

#TO CREATE A DATABASE

SYNTAX: CREATE DATABASE database_name;

EXAMPLE: CREATE db;

IF WE DON'T KNOW WHEATHER A DATABSE EXISTS OR NOT --> WE CAN USE ---> IF NOT EXISTS

CODE: CREATE DATABASE IF NOT EXISTS db;

/* db database will be created if it not exists */

#TO CREATE A TABLE

SYNTAX: CREATE TABLE table_name
(column_name property, ...);

EXAMPLE: CREATE TABLE records
(sno integer, student_name varchar(10) , email varchar(20), year integer,column_name integer) ;

****NOTE: WE MUST USE A DATABASE BEFORE WE CREATE TABLES AND A TABLE MUST HAVE AT LEAST ONE VISIBLE COLUMN****

#TO ADD A SINGLE RECORD

SYNTAX: INSERT INTO table_name VALUES (item_name ,)

NOTE: WE CAN ALSO USE VALUE INTSEAD OF VALUES AS WE ADD A SINGLE RECORDS

EXAMPLE: INSERT INTO records VALUES

```
(1, 'ram', 'ram@gmail.com', 2004, 10)
```

#TO ADD MULTIPLE REOCRDS

SYNTAX: INSERT INTO table_name VALUE

```
(row_1_item_no_1 , row_1_item_no_2 , row_1_item_no_3)
```

```
(row_2_item_no_1 , row_2_item_no_2 , row_2_item_no_2)
```

```
....
```

```
....
```

```
(row_n_item_no_1 , row_n_item_no_2 , row_n_item_no_3)
```

INSERT INTO records VALUES

```
(2, 'sam', 'sam@yahoo.com', 2003, 20),
```

```
(3, 'hari', 'hari@outlook.com', 2002, 30),
```

```
(4, 'ramu', 'ramu@gmail.com', 2004, 20);
```

SELECT

#TO SELECT A SINGLE COLUMN

SYNTAX: SELECT column_name

FROM table_name;

EXAMPLE: SELECT student_name

FROM records;

OUTPUT:

```
+-----+
| student_name |
+-----+
| ram          |
| sam          |
| hari         |
| ramu         |
+-----+
```

#TO SELECT MULTIPLE COLUMN

SYNTAX: SELECT column_name_1,column_name_2,column_name_3

FROM table_name;

EXAMPLE: SELECT student_name , year;

FROM records;

OUTPUT:

```
+-----+-----+
| student_name | year |
+-----+-----+
| ram          | 2004 |
| sam          | 2003 |
| hari         | 2002 |
| ramu         | 2004 |
+-----+-----+
```

#TO SELECT ALL THE COLUMNS FROM A TABLE:

SYNTAX: SELECT *
FROM table_name;

EXAMPLE: SELECT *
FROM records;

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

#TO SELECT ALL THE VALUES FROM A COLUMN WITHOUT ANY DUPLICATES RECORDS

SYNTAX: SELECT DISTINCT column_name
FROM table_name;

EXAMPLE: SELECT DISTINCT year
FROM records;

OUTPUT:

year
2004
2003
2002

#USING ARITHMETIC OPERATORS

+ , - , * , / , %

#SELF - EXPLANATORY

```
CODE: SELECT year , year * 100
      FROM records;
```

OUTPUT:

+-----+-----+	
year year * 100	
+-----+-----+	
2004 200400	
2003 200300	
2002 200200	
2004 200400	
+-----+-----+	

```
CODE: SELECT year , year * 10 , "TEST"
      FROM records;
```

OUTPUT:

+-----+-----+-----+		
year year * 10 TEST		
+-----+-----+-----+		
2004 20040 TEST		
2003 20030 TEST		
2002 20020 TEST		
2004 20040 TEST		
+-----+-----+-----+		

#SELF-EXPLANATORY

```
CODE: SELECT 7+1;
```

OUTPUT:

+-----+	
7+1	
+-----+	
8	
+-----+	

```
CODE: SELECT 7 % 2;
```

OUTPUT:

+-----+	
7 % 2	
+-----+	
1	
+-----+	

SHOW AND DESCRIBE:

SYNTAX: SHOW TABLES

Shows the list of tables inside the current database

OUTPUT:

```
+-----+
| Tables_in_db |
+-----+
| records      |
+-----+
```

SYNTAX: DESCRIBE table_name or DES table_name;

EXAMPLE: DESCRIBE records

NOTE: WE CAN ALSO USE DES INSTEAD OF DESCRIBE

OUTPUT:

```
+-----+-----+-----+-----+-----+-----+
| Field      | Type      | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| sno        | int       | YES  |     | NULL    |       |
| student_name | varchar(10) | YES  |     | NULL    |       |
| email      | varchar(20) | YES  |     | NULL    |       |
| year       | int       | YES  |     | NULL    |       |
| column_name | int       | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+
```

ALIASING:

#USING ALIAS

SYNTAX: SELECT column_name as alias_name /*USE OF AS IS OPTIONAL */
FROM table_name;

EXAMPLE: SELECT year as this_will_display_instead_of_year
FROM records;

****NOTE:** Alias name does not change the actual column name. Original column name remains the same**

OUTPUT:

```
+-----+
| this_will_display_instead_of_year |
+-----+
|                                     | 2004 |
|                                     | 2003 |
|                                     | 2002 |
|                                     | 2004 |
+-----+
```

****NOTE:** USE OF AS IS OPTIONAL. THE BELOW CODE WILL YIELD THE SAME RESULT AS THE ABOVE ONE.
ALSO THERE SHOULD BE NO SPACE IN BETWEEN IF WE USE ALIAS NAME WITHOUT QUOTES.

SELECT year as y FROM records (OR) SELECT year y FROM records (OR) SELECT year 'y' FROM records

#ALIASING MULTIPLE COLUMN NAMES

SYNTAX: SELECT column_name AS new_name, another_column_name as another_new_name
FROM table_name;

CODE: SELECT student_name as name , year as ' birth year'
FROM records;

TABLE ALIASES(PREREQUISITE : JOINS)

#TABLE ALIASES

LIKE COLUMN ALIASES WE CAN HAVE ALIAS NAME FOR TABLES TOO

SYNTAX: SELECT table_alias_1.coloumn_name , table_alias_2
FROM tabel_name_1 table_alias_1 , table_name_2 table_alias_2;

CONSIDER THE TABLES BELOW

TABLE NAME: records

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

TABLE NAME: test_table

name	year	present
ram	2004	NULL
NULL	NULL	NULL
sam	2001	absent

TABLE NAME: test_table_3

sno	student_name	email	year_of_birth	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

CODE: SELECT a1.student_name , a2.year_of_birth
FROM records a1 , test_table_3 a2;

OUTPUT:

student_name	year_of_birth
ramu	2004
hari	2004
sam	2004
ram	2004
ramu	2003
hari	2003
sam	2003
ram	2003
ramu	2002
hari	2002
sam	2002
ram	2002
ramu	2004
hari	2004
sam	2004
ram	2004

#WE CAN AVOID THE ABIVE SITUATION USING WHERE CLAUSE

CODE: SELECT a1.student_name , a2.year_of_birth
FROM records a1 , test_table_3 a2
WHERE a1.sno = a2.sno;

OUTPUT:

column:

+-----+-----+	
student_name	year_of_birth
+-----+-----+	
ram	2004
sam	2003
hari	2002
ramu	2004
+-----+-----+	

WE CAN ALSO OTHER CONDITION WITH WHERE CLAUSE

COMMENTS

#LIKE PYTHON WE CAN USE COMMENTS

/* THIS IS A COMMENT */

WHERE

#GENERAL SYNTAX

```
SELECT column_name,  
FROM table_name,  
WHERE condition;
```

NOTE: THE FOLLOWING OPERATORS CAN BE USED IN PLACE OF CONDITION

RELATIONAL OPERATORS

#USING RELATIONAL OPERATORS

= (EQUALITY OPERATOR LIKE == IN PYTHON)

/* Q: DISPLAY THE RECORDS OF THE STUDENTS WHOSE NAME IS RAM */

```
CODE: SELECT *
      FROM records
      WHERE student_name = 'ram';
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10

>(greater than) , <(lesser than) , >=(greater than or equal to) , <=(less than or equal to)

/* Q: DISPLAY THE RECORDS OF THE STUDENT WHOSE BIRTH YEAR IS LESS THAN OR EQUAL TO 2003 */

```
CODE: SELECT *
      FROM records
      WHERE year <= 2003;
```

OUTPUT:

sno	student_name	email	year	column_name
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30

<> or (!== --> NOT VALID IN MYSQL 8.0)

/* Q: DISPLAY THE RECORDS OF THE STUDENT WHOSE BIRTH YEAR IS NOT EQUAL TO 2003 */

```
CODE: SELECT *
      FROM records
      WHERE year <> 2003;
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

BETWEEN

#BETWEEN

```
SYNTAX: SELECT *
        FROM table_name
        WHERE column_name BETWEEN lower_limit AND upper_limit; #inclusive of upper_limit and lower_limit
```

```
/* Q: DISPLAY THE RECORDS OF THE STUDENT WHOSE BIRTH YEAR IS IN THE RANGE OF 2002 TO 2004 */
```

```
SYNTAX: SELECT *
        FROM records
        WHERE year BETWEEN 2002 AND 2004; #includes both 18 and 22
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

LIKE

```
#LIKE(only text[string] values)      ---> USING WILDCARDS(REGEX)  --> PATTERNS(REGEX)
#'a%' ---> starting with a
#'%a' ---> ending with a
#'%a%' ---> contains a
#% --> wildcard
#a% --> pattern
```

```
/* SELECT THE NAME OF THE STUDENT [STARTING] WITH THE LETTER R */
```

```
CODE: SELECT *
      FROM records
      WHERE student_name LIKE 'r%';
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
4	ramu	ramu@gmail.com	2004	20

*** Note r% --> will select both r and R **

'%r%' ---> WILL SELECT ALL THE RECORDS CONTAINING THE LETTER r or R -> (CAN BE START OR IN END AND CAN BE IN BETWEEN)

'%r' ---> WILL SELECT ALL THE RECORDS WHICH ENDS WITH LETTER r or R

Empty set (0.07 sec) ---> DISPLAYED WHEN IT FINDS NO MATCHING RECORDS(
SELECT * FROM records WHERE student_name LIKE 'r%');

```
/* Q: DISPLAY THE RECORDS THE STUDENTS IF THE LENGTH OF THE NAME OF STUDENT IS EXACTLY THREE CHARACTERS */
```

```
CODE: SELECT *
      FROM records
      WHERE student_name LIKE '___';
```

"___" ---> There are three underscore(_) inside the quotes(" ")

---> Three underscores are used to match any string with exactly three characters

---> Underscore here represents characters(four underscore matches any string with exactly 4 characters)

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20

#DIFFERENCE BETWEEN '___' AND '___%'

'___' ---> MATCHES ANY STRING WHICH HAS EXACTLY THREE CHARACTERS

'___%' ---> MATCHES ANY STRING WHICH HAS AT LEAST THREE CHARACTERS

```
CODE: SELECT *
      FROM records
      WHERE student_name LIKE '___%';
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

```
#IN (MEMBERSHIP)
```

```
/*Q: DISPLAY THE RECORDS OF THE STUDENT IF A STUDENT IS BORN IN THE YEAR 2002 AND 2004 */
```

```
CODE: SELECT *  
      FROM records  
      WHERE year IN (2002,2004);
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

LOGICAL OPERATOR

```
#LOGICAL OPERATOR (AND , OR)
```

```
#AND (BOTH THE STATEMENTNS MUST BE TRUE)
```

```
/* Treat AND as * (LOGICAL MULTIPLICATION)
```

```
True as 1  
False as 0
```

```
True AND True ---> 1 * 1 ---> 1 ---> True  
True AND False ---> 1 * 0 ---> 0 ---> False  
False AND True ---> 0 * 1 ---> 0 ---> False  
False AND False ---> 0 * 0 ---> 0 ---> False
```

Anything multiplied by zero is zero so if there

```
Treat OR as + (LOGICAL ADDITION)
```

```
True OR True ---> 1 + 1 ---> 1 ---> True /* here 1+1 --> 1 (still True) */  
True OR False ---> 1 + 0 ---> 1 ---> True  
False OR True ---> 0 + 1 ---> 1 ---> True  
False OR False ---> 0 + 0 ---> 0 ---> False
```

```
*/
```

```
#AND (BOTH THE STATEMENTNS MUST BE TRUE)
```

```
/* Q: DISPLAY THE REOCORDS OF THE STUDENTS IF THEIR NAME STARTS WITH R AND THEIR BIRTH YEAR IS GREATER THAN OR EQUAL TO2003 */
```

```
CODE: SELECT *  
      FROM records  
      WHERE student_name LIKE 'r%'  
      AND year >= 2003;
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
4	ramu	ramu@gmail.com	2004	20

#OR (AT LEAST ONE OF THE STATEMENT SHOULD BE TRUE)

/* Q: DISPLAY THE REOCORDS OF THE STUDENTS IF THEIR NAME STARTS WITH R OR IF THEIR BIRTH YEAR IS GREATER THAN OR EQUAL TO 2003 */

```
CODE: SELECT *
      FROM records
      WHERE student_name LIKE 'r%'
      OR year >= 2003;
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
4	ramu	ramu@gmail.com	2004	20

#SIMILARITY BETWEEN OR AND IN

```
CODE 1: SELECT *
      FROM records
      WHERE year = 2002 OR year = 2003 OR year 2004;
```

/* THE ABOVE QUERY CAN ASLO BE WRITTEN USING THE *IN* OPERATOR */

```
CODE 2: SELECT *
      FROM records
      WHERE year IN (2002 , 2003 , 2004);
```

#NOT

```
CODE: SELECT *
      FROM records
      WHERE student_name NOT LIKE '%a'; /* SELECTS ALL THE RECORDS WHOSE NAME DOESN'T START WITH A */
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

```
CODE: SELECT *
      FROM records
      WHERE year NOT IN (2004,2002) ; /* SELECTS ALL THE RECORDS EXCEPT 2004 AND 2002 */
```

OUTPUT:

sno	student_name	email	year	column_name
2	sam	sam@yahoo.com	2003	20

```
CODE: SELECT *
      FROM records
      WHERE year NOT BETWEEN 2002 AND 2004; /* SELECTS ALL THE RECORD EXCEPT 2002 , 2003 AND 2004 */
```

OUTPUT:

Empty set

NOT LIKE . IS NOT and so on

ORDER BY

ORDER BY

#TO ORDER THE VALUES OF A COLUMN BASED ON ANOTHER COLUMN

#NOTE : ORDER BY orders the value in ascending(ASC) order by default.

```
CODE: SELECT *
      FROM records
      ORDER BY year; #ASC ----> ORDER BY year ASC;
```

OUTPUT:

sno	student_name	email	year	column_name
3	hari	hari@outlook.com	2002	30
2	sam	sam@yahoo.com	2003	20
1	ram	ram@gmail.com	2004	10
4	ramu	ramu@gmail.com	2004	20

=====

#To order an COLUMN which has only words(strings to be specific)

```
CODE: SELECT *
      FROM records
      ORDER BY student_name; #orders in alphabectial order in ASC
```

OUTPUT:

sno	student_name	email	year	column_name
3	hari	hari@outlook.com	2002	30
1	ram	ram@gmail.com	2004	10
4	ramu	ramu@gmail.com	2004	20
2	sam	sam@yahoo.com	2003	20

=====

#To order in descending order

```
CODE: SELECT *
      FROM records
      ORDER BY year DESC; #orders DESC
```

OUTPUT:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
4	ramu	ramu@gmail.com	2004	20
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30

OPERATOR PRECEDENCE:

```
INTERVAL
BINARY, COLLATE
!
- (unary minus), ~ (unary bit inversion)
^
*, /, DIV, %, MOD
-, +
<<, >>
&
|
= (comparison), <=>, >=, >, <=, <, <>, !=, IS, LIKE, REGEXP, IN, MEMBER OF
BETWEEN, CASE, WHEN, THEN, ELSE
NOT
AND, &&
XOR
OR, ||
= (assignment), :=
```

SOURCE: <https://dev.mysql.com/doc/refman/8.0/en/operator-precedence.html>

AGGREGATE FUNCTIONS:

#AGGREGATE FUNCTIONS aka GROUP FUNCTIONS aka MULTIPLE ROW FUNCTIONS

```
SYNTAX: SELECT aggregate_funtion_name(coloumn_name)
        FROM table_name;
```

So far we have only seen only one aggregate function(DISTINCT) if I am correct.
From now on we will learn about the other aggregate functions.

MORE INFO ON AGGREGATE FUNTION CAN BE FOUND AT : <https://dev.mysql.com/doc/refman/8.0/en/aggregate-functions.html>

YOU CAN ALSO USE ALIAS WITH AGGREGATE FUNCTIONS

#MIN ---> RETURNS THE SMALLEST VALUE IN A COLUMN

```
CODE: SELECT MIN(year)
        FROM records;
```

OUTPUT:

```
+-----+
| MIN(year) |
+-----+
|      2002 |
+-----+
```

#AGGREGATE FUNCTIONS--> THOSE WHICH RETURN SINGLE VALUE(MIN,MAX,AVG,SUM,etc..)

#MAX ---> RETURNS THE LARGEST VALUE IN A COLUMN

```
CODE: SELECT MAX(year)
        FROM records;
```

OUTPUT:

```
+-----+
| MAX(year) |
+-----+
|      2004 |
+-----+
```

#AVG ---> TO FIND THE AVERAGE VALUE

$$\text{average} = \frac{\text{value}_1 + \text{value}_2 + \dots + \text{value}_n}{\text{no_of_values}(n)}$$

CODE: SELECT AVG(year)
FROM records;

OUTPUT:

```
+-----+  
| AVG(year) |  
+-----+  
| 2003.2500 |  
+-----+
```

$$\text{average} = \frac{2004 + 2003 + 2002 + 2004}{4} = \frac{8013}{4} = 2003.2500$$

#COUNT --> TO COUNT THE NO ITEMS IN A COLUMN

#IT COUNTS ONLY NON-EMPTY(NULL TO BE SPECIFIC) VALUES ---> IT DOESN'T TAKE ACCOUNT OF ANY NULL VALUES

CODE: SELECT COUNT(year)
FROM records;

OUTPUT:

```
+-----+
| COUNT(year) |
+-----+
|          4 |
+-----+
=====
```

#COUNT(*)

#COUNT(*) --> TO COUNT THE NUMBER OF ROWS IN A TABLE

CODE: SELECT COUNT(*)
FROM records;

OUTPUT:

```
+-----+
| COUNT(*) |
+-----+
|          4 |
+-----+
=====
```

COUNT(column_name) VS COUNT(*)

COUNT(column_name) ----> ONLY TAKES ACCOUNT OF NON NULL VALUES

COUNT(*) ----> TAKES ACCOUNT OF NULL AND NON NULL VALUES i.e ALL VALUES

CONSIDER THE TABLE BELOW:

NAME OF THE TABLE: test_table

```
+-----+-----+-----+
| name | year | present |
+-----+-----+-----+
| ram  | 2004 | NULL    |
| NULL | NULL | NULL    |
| sam  | 2001 | absent  |
+-----+-----+-----+
```

CODE: SELECT COUNT(present) FROM test_table;

OUTPUT:

```
+-----+
| COUNT(present) |
+-----+
|          1 |
+-----+
```

CODE: SELECT COUNT(*) FROM test_table;

OUTPUT:

```
+-----+
| COUNT(*) |
+-----+
|          3 |
+-----+
```

#SUM ---> RETURNS THE SUM OF ALL THE VALUES IN A COLUMN

```
CODE: SELECT SUM(year)
      FROM records;
```

OUTPUT:

+-----+
SUM(year)
+-----+
8013
+-----+

MORE ON DISTINCT AND ALL

DISTINCT CAN BE USED IN COMBINATION WITH OTHER AGGREGATE FUNCTIONS

MAX(DISTINCT column_name) , MIN(DISTINCT column_name) , AVG(DISTINCT column_name) ,
SUM(DISTINCT column_name)

WHEN DISTINCT IS USED WITH SUM ONLY DUPLICATE ENTRIES ARE NOT TAKEN INTO ACCOUNT

CODE: SELECT SUM(DISTINCT year)
FROM records;

OUTPUT:

```
+-----+
| SUM(DISTINCT year) |
+-----+
|           6009 |
+-----+
```

#ALL vs DISTINCT VS COUNT---> COSIDER ALL THE VALUES

CONSIDER THE TABLE BELOW

NAME OF THE TABLE: test_table_2

```
+-----+-----+-----+
| name | year | present |
+-----+-----+-----+
| ram  | 2001 | NULL    |
| sam  | 2002 | present  |
| ramu | 2003 | present  |
| som  | 2004 | absent   |
+-----+-----+-----+
```

COUNT(column_name) ---> counts only non NULL values

COUNT(DISTINCT , column_name) ----> counts only distinct non NULL values

COUNT(ALL , column_name) ---> counts only non NULL values

CODE: SELECT COUNT(present) FROM test_table_2;

OUTPUT:

```
+-----+
| COUNT(present) |
+-----+
|           3 | ----> present , present , absent
+-----+
```

CODE: SELECT COUNT(DISTINCT present) FROM test_table_2;

OUTPUT:

```
+-----+
| COUNT(DISTINCT present) |
+-----+
|           2 | ---> present , absent
+-----+
```

(present ,absent(duplicate present is not taken into account while counting)

CODE: SELECT COUNT(ALL present) FROM test_table_2;

OUTPUT:

```
+-----+
| COUNT(ALL present) |
+-----+
|           3 | --> present , present , absent
+-----+
```

MY SQL FUNCTIONS

STRING FUNTIONS:


```
#CHAR()
```

```
#NOTE: NEWER VERSIONS OF MYSQL INTERPRETS THE BINARY RESULT AS HEXADECIAMAL
```

```
/* TYPE status IN MYSQL COMMAND LINE CLIENT */
```

```
Connection id:      11
Current database:    db
Current user:        root@localhost
SSL:                 Cipher in use is TLS_AES_256_GCM_SHA384
Using delimiter:     ;
Server version:      8.0.27 MySQL Community Server - GPL
Protocol version:    10
Connection:          localhost via TCP/IP
Server characterset: utf8mb4
Db characterset:     utf8mb4
Client characterset: utf8mb4
Conn. characterset:  utf8mb4
TCP port:            3306
Binary data as:      Hexadecimal #THIS IS THE REASON WHY WE GET HEXADECIAMAL VALUE
Uptime:              23 hours 35 min 0 sec
```

```
#TO SOLVE THIS PROBLEM FOLLOW THE STEPS BELOW THERE ARE TWO WAYS:
```

```
WAY 1:
```

```
ONE QUICK FIX TO SOLVE THIS PROBLEM IS TO USE USING ASCII
```

```
i.e.. SELECT CHAR(65 USING ASCII);
```

```
SYNTAX: CHAR(N,... [USING charset_name])
```

```
MORE INFO CAN BE FOUND AT:https://dev.mysql.com/doc/refman/8.0/en/string-functions.html#function\_char
```

```
WAY 2:
```

```
STEP 1: GOTO TO THE FOLDER WHERE THE BIN FOLDER OF MYSQL SERVER WHICH WILL BE LOCATED INSIDE MYSQL
```

```
IF YOU ARE USING WINDOWS 10 --> C:\Windows\System32\cmd.exe ---> THIS WOULD BE PATH OF THE BIN FOLDER(IN MOST CASES IF NOT LOCATE THE FOLDER B
```

```
STEP 2: OPEN COMMAND PROMPT AND KEY IN THE BELOW COMMAND
```

```
mysql -u root -p --skip-binary-as-hex
```

```
STEP 3: ENTER THE PASSWORD
```

```
STEP 4: RUN THE FOLLOWING
```

```
SELECT CHAR(65)
```

```
/* NOTE YOU NEED TO DO THIS STEP EVERY TIME BEFORE YOU USE MYSQL AND MYSQL CLI CAN BE USED DIRECTLY FROM CMD(COMMAND PROMPT) */
```

```
MORE INFO CAN BE FOUND AT: https://bugs.mysql.com/bug.php?id=99480
```

```
CODE: SELECT CHAR(65 USING ASCII) AS "Alphabet";
```

```
OUTPUT:
```

```
+-----+
| Alphabet |
+-----+
| A        |
+-----+
```

```
#CONCAT()
```

```
-> IF COLUMN NAMES ARE USED THE RECORDS GETS CONCATENATED
```

```
CODE: SELECT CONCAT(student_name , year) as "NAME AND YEAR"
FROM records;
```

```
OUTPUT:
```

```
+-----+
```

NAME AND YEAR
ram2004
sam2003
hari2002
ramu2004

-> CAN ALSO BE USED TO CONCAT TWO STRINGS

CODE: SELECT CONCAT("SIBI" , "RAJ") AS "NAME";

OUTPUT:

NAME
SIBIRAJ

CODE: SELECT "SI" "BI" "RAJ";

OUTPUT:

SI	BI	RAJ
SIBIRAJ		

#LOWER()/LCASE() ---> https://dev.mysql.com/doc/refman/8.0/en/string-functions.html#function_lcase

CODE: SELECT LOWER("PYTHON");

OUTPUT:

LOWER("PYTHON")
python

#UPPER()/LCASE()

CODE: SELECT UPPER("python");

OUTPUT:

UPPER("python")
PYTHON

TRIM ---> REMOVES TRAILING AND LEADING SPACES --> LIKE STRIP()

LTRIM ---> LIKE LSTRIP()

RTIRM ---> LIKE RSTIP()

CODE: SELECT TRIM(" AKA STRIP ");

OUTPUT:

TRIM(" AKA STRIP ")
AKA STRIP

#SUBSTRING()/SUBSTR()

SUBSTR(given_string,3,4) ---> SELECT 4 CHARACTERS STARING FROM THE INDEX 3

LEFT SIDE INDEX STARTS FROM 0 AND RIGHT SIDE INDEX STARTS FROM -1

CODE: SELECT SUBSTR("0123456789" , 3 , 4) AS SLICING;

OUTPUT:

```
+-----+
| SLICING |
+-----+
| 2345    |
+-----+
```

NUMERIC FUNTIONS

#MOD() ---> RETURNS THE REMAINDER ---> LIKE % IN PYTHON ---> ** REMAINDER(INT PART) **

CODE: SELECT MOD(7,2);

OUTPUT:

```
+-----+
| MOD(7,2) |
+-----+
|         1 |
+-----+
```

#POWER()

CODE: SELECT POWER(2,3); ---> 2^3 OR 2**3

OUTPUT:

```
+-----+
| POWER(2,3) |
+-----+
|          8 |
+-----+
```

#ROUND() ---> TO ROUND THE EXPRESSION TO THE NUMBER OF DECIMAL POINT

MORE INFO ON ROUNDING CAN BE FOUND AT:

<https://tutorax.com/blogue/en/how-to-round-decimals-rounding-numbers-guide/#:~:text=There%20are%20certain%20rules%20to,9%20round%20the%20number>

CODE: SELECT ROUND(1.26,1);

OUTPUT:

```
+-----+
| ROUND(1.26,1) |
+-----+
|          1.3 |
+-----+
```

CODE: SELECT ROUND(1.25,1);

OUTPUT:

```
+-----+
| ROUND(1.25,1) |
+-----+
|          1.3 |
+-----+
```

CODE: SELECT ROUND(1.26,1);

OUTPUT:

```
+-----+
| ROUND(1.26,1) |
+-----+
|          1.3 |
+-----+
```

=====

#SIGN() ---> RETURNS THE SIGN OF THE NUMBER

CODE: SELECT SIGN(-10);

OUTPUT:

```
+-----+
| SIGN(-10) |
+-----+
|      -1 |
+-----+
```

CODE: SELECT SIGN(10);

OUTPUT:

```
+-----+
| SIGN(10) |
+-----+
|       1 |
+-----+
```

=====

#SQRT()

CODE: SELECT SQRT(4);

OUTPUT:

```
+-----+
| SQRT(4) |
+-----+
|       2 |
+-----+
```

=====

#TRUNCATE() ---> REMOVES(TURNKATES) THE CHARACTERS UPTO TO THE GIVEN DECIMAL PLACES

CODE: SELECT TRUNCATE(123456,3) AS "I WON'T GET TRUNCATED"; ---> ONLY TRUBCATES DECIMAL PLACES

OUTPUT:

```
+-----+
| I WON'T GET TRUNCATED |
+-----+
|          123456 |
+-----+
```

CODE: SELECT TRUNCATE(123.456 , 0) AS "MISSING:456";

OUTPUT:

```
+-----+
| MISSING:456 |
+-----+
|       123 |
+-----+
```

DATE AND TIME FUNTIONES

CURDATE() / CURRENT_DATE() / CURRENT_DATE ---> RETURNS THE CURRENT DATE

CODE: SELECT CURDATE();

OUTPUT:

```
+-----+
| CURDATE() |
+-----+
| 2022-01-08 |
+-----+
```

CODE: SELECT CURDATE() + 1;

OUTPUT:

```
+-----+
```

```

| CURDATE() + 1 |
+-----+
|      20220109 | ---> 2022-01-08 + 1 ---> 20220109
+-----+

```

=====

#DATE() ---> USED TO EXTRACT YYYY-MM-DD PART

CODE: SELECT DATE('2001-01-01');

OUTPUT:

```

+-----+
| DATE('2001-01-01') |
+-----+
| 2001-01-01          |
+-----+

```

CODE: SELECT DATE('2001-01-01 01:01:01');

OUTPUT:

```

+-----+
| DATE('2001-01-01 01:01:01') |
+-----+
| 2001-01-01                  |
+-----+

```

=====

#MONTH() --> USED TO EXTRACT MM PART

CODE: SELECT MONTH('2001-01-01');

OUTPUT:

```

+-----+
| MONTH('2001-01-01') |
+-----+
|                      |
|                      1 |
+-----+

```

=====

#YEAR() ---> SELF EXPLANATORY

CODE: SELECT YEAR('2001-01-01');

OUTPUT:

```

+-----+
| YEAR('2001-01-01') |
+-----+
|                    2001 |
+-----+

```

=====

#NOW() ---> RETURNS US THE TIME WHEN THE FUNTION STARTED TO GET EXCECUTED

CODE: SELECT NOW();

OUTPUT:

```

+-----+
| NOW()          |
+-----+
| 2000-01-01 01:01:01 |
+-----+

```

=====

#SYSDATE() ---> RETURN US THE CURRENT DATE AND TIME

CODE: SELECT SYSDATE();

OUTPUT:

```

+-----+
| SYSDATE()       |
+-----+
| 2000-01-01 01:01:01 |
+-----+

```

=====

CODE: SELECT NOW() , SLEEP(5) , NOW();

OUTPUT:

```
+-----+-----+-----+
| NOW()          | SLEEP(5) | NOW()          |
+-----+-----+-----+
| 2000-01-01 01:01:01 |      0 | 2000-01-01 01:01:01 | ---> SAME TIME
+-----+-----+-----+
```

CODE: SELECT SYSDATE() , SLEEP(5) , SYSDATE();

OUTPUT:

```
+-----+-----+-----+
| SYSDATE()      | SLEEP(5) | SYSDATE()      |
+-----+-----+-----+
| 2000-01-01 01:01:01 |      0 | 2000-01-01 01:01:06 | ----> INITIAL TIME + 5 SECONDS
+-----+-----+-----+
```

CODE: SELECT NOW() , SLEEP(5) , SYSDATE();

OUTPUT:

```
+-----+-----+-----+
| NOW()          | SLEEP(5) | SYSDATE()      |
+-----+-----+-----+
| 2000-01-01 01:01:01 |      0 | 2000-01-01 01:01:06 | ---> INITIAL TIME + 5 SECONDS
+-----+-----+-----+
```

CODE: SELECT SYSDATE() , SLEEP(5) , NOW();

OUTPUT:

```
+-----+-----+-----+
| SYSDATE()      | SLEEP(5) | NOW()          |
+-----+-----+-----+
| 2000-01-01 01:01:01 |      0 | 2000-01-01 01:01:01 | ---> SAME TIME
+-----+-----+-----+
```

Null Handling

Let us consider the table given below:

NAME OF THE TABLE: records3

```
+-----+-----+-----+
| name | year | present |
+-----+-----+-----+
| ram  | 2001 | present |
| sam  | 2002 | present |
| ramu | 2003 | NULL    |
+-----+-----+-----+
```

To create the table above use the following commands:

USE db; ---> (use database_name)

CREATE TABLE records3(name varchar(10) , year integer , present varchar(10));

INSERT INTO records3 VALUES('ram' , 2001 , 'present') , ('sam' , 2002 , 'present'), ('ramu', 2003 , NULL);

NULL here in the present column means that the person is absent on that particular day(2001-01-01).

The day we are here referring to is 2001-01-01.

#IFNULL()

Syntax: IFNULL(column_name , value_to_be_substituted)

IFNULL() ---> Used to change all the NULL value from the give column to the given value

CODE: SELECT name , year , IFNULL(present , 'absent')
FROM records3;

OUTPUT:

```
+-----+-----+-----+
| name | year | IFNULL(present , 'absent') |
+-----+-----+-----+
| ram  | 2001 | present                    |
| sam  | 2002 | present                    | ---> NULL values are changed into absent
| ramu | 2003 | absent                     |
+-----+-----+-----+
```

```
+-----+-----+-----+-----+
```

```
=====
```

```
#USING **AS** WITH IFNULL()
```

```
CODE: SELECT name , year , IFNULL(present , ' absent') AS 'attendance'
      FROM records3;
```

```
OUTPUT:
```

```
+-----+-----+-----+-----+
| name | year | attendance |
+-----+-----+-----+-----+
| ram  | 2001 | present    |
| sam  | 2002 | present    |
| ramu | 2003 | absent     |
+-----+-----+-----+-----+
```

```
=====
```

```
#FINDING NULL USING THE WHERE OPERATOR:
```

```
CODE: SELECT *
      FROM records3
      WHERE present IS NULL; ---> SELECTS ALL THE NULL VALUE
```

```
OUTPUT:
```

```
+-----+-----+-----+-----+
| name | year | present |
+-----+-----+-----+-----+
| ramu | 2003 | NULL    |
+-----+-----+-----+-----+
```

```
CODE: SELECT *
      FROM records3
      WHERE present IS NOT NULL; ----> SELF - EXPLANATORY
```

```
OUTPUT:
```

```
+-----+-----+-----+-----+
| name | year | present |
+-----+-----+-----+-----+
| ram  | 2001 | present |
| sam  | 2002 | present |
+-----+-----+-----+-----+
```

MISSSED NUANCES

```
/* In this section we will cover a few nuances that we have missed earlier */
```

```
SELECT year (or) SeLeCt year (or) sELEcT yEar  
FROM records; (or) fRoM records; (or) fROM rECROds;
```

ALL THE ABOVE QUERIES YIELD THE SAME RESULT ---> SQL IS CASE INSENSITIVE

NUMBER()

NUMBER(5,3) ---> NUMBER WITH A MAXIMUM OF 5 DIGIT WITH 3 DECIMAL PLACES

STRING VS NUMERIC FUNTIONS

THE OUTPUT OF ALL THE STRING FUNCTIONS STARTS FROM THE LEFT

THE OUTPUT OF ALL THE NUMERIC FUNTIONS STARTS FROMT THE RIGHT

NUMERIC FUNTION	STRING FUNCTION
+-----+ MISSING:456	+-----+ LOWER("PYTHON")
+-----+ 123	+-----+ python
+-----+	+-----+

SUBSTR(given_string , start_index , no_of_characters)

start_index ---> can be negative or positive (POSITIVE OR NEGATIVE NUMBERS)

no_of_character ---> must be a positive integer(NATURAL NUMBERS)

CODE: SELECT SUBSTR('0123456789' , 3 , -4);

OUTPUT:

```
+-----+  
| SUBSTR('0123456789' , 3 , -4) |  
+-----+  
|                               |  
+-----+
```

USING ARITHMETIC AND RELATIONAL OPERATOR WITH DATE AND TIME FUNTIONS

CODE: SELECT YEAR('2001-01-01') + 10;

OUTPUT:

```
+-----+  
| YEAR('2001-01-01') + 10 |  
+-----+  
| 2011 |  
+-----+
```

CODE: SELECT YEAR('2001-01-01') > 10;

OUTPUT:

```
+-----+  
| YEAR('2001-01-01') > 10 |  
+-----+  
| 1 | --> 1 --> True  
+-----+
```

TABLE CREATION COMMANDS (CONTINUED)

DROP

#TO DELETE A DATABASE

SYNTAX: DROP DATABASE database_name;

EXAMPLE: DROP DATABASE db; #---> Database db will be deleted if it exists

OUTPUT: Query OK, 0 rows affected (0.31 sec)

#TO DELETE A TABLE

SYNTAX: DROP table_name;

EXAMPLE: DROP records; #---> Table records will be deleted if it exists

OUTPUT: Query OK, 0 rows affected (1.15 sec)

#TO DELETE A COLUMN

SYNTAX: ALTER TABLE table_name

DROP COLUMN column_name;

EXAMPLE: ALTER TABLE records

DROP COLUMN year; # column year will be deleted

#IF EXISTS

CAN BE USED TO DELETE A TABLE IF IT EXISTS

SYNTAX: DROP TABLE IF EXISTS table_name;

SYNTAX: DROP TABLE IF EXISTS records; #---> Table records will be deleted if it exists

CONSTRAINT

#CONSTRAINT

DATABASE INTEGRITY CONSTRAINTS:

(i) Unique constraint

(ii) Primary Key constraint

(iii) Foreign Key constraint

(iv) Check constraint

(v) Default Key constraint

(vi) NOT NULL

(vii) ENUM

(viii) SET

and so on...

#NOT NULL ---> SHOULD BE USED WHEN YOU DON'T WANT A COLUMN TO ACCEPT NULL DATA

CODE: CREATE TABLE records4

(sno integer,

student_name varchar(10)

,email varchar(20) NOT NULL) ;

/* email column now can't accept NOT NULL values*/

CODE: INSERT INTO records4 VALUE(1,'ram',NULL);

OUTPUT: ERROR 1048 (23000): Column 'email' cannot be null

#UNIQUE ---> SHOULD BE USED WHEN YOU DON'T WANT A COLUMN TO HAVE UNIQUE RECORDS(NO DUPLICATE RECORDS)

CODE: CREATE TABLE records6

(sno integer NOT NULL UNIQUE,

student_name varchar(10) ,

email varchar(20) NOT NULL) ;

CODE: INSERT INTO records6 VALUE

(1,'ram','ram@gmail.com');

OUTPUT: Query OK, 1 row affected

CODE: INSERT INTO records6 VALUE

(1,'ram','ram@yahoo.com');

OUTPUT: ERROR 1062 (23000): Duplicate entry '1' for key 'records6.sno'

=====

#PRIMARY KEY ---> CAN BE APPLIED TO ONLY ONE COLOUMN AND IT DOESN'T ALLOW NULL VALUES
ERROR(ERROR 1068 (42000): Multiple primary key defined) ---> PRODUCED WHEN APLIED TO MULTIPLE COLUMNS

PRIMARY KEY ---> THIS IS SERVES AS AN UNIQUE IDENTIFIER
---> TWO PERSON CAN HAVE SAME NAME BUT THEY CAN'T HAVE SAME FINGERPRINT
---> HERE FINGERPRINT SERVES THE PURPOSE OF PRIMARY KEY
---> IN TABLE WE MUST HAVE A PRIMARY KEY TO UNIQUELY IDENTIFY A RECORDS IN A TABLE

AS WE KNOW PRIMARY KEY DOES NOT ALLOW NULL VALUES THE PRIMARY KEY ALSO ACTS LIKE NOT NULL CONSTARINT

CODE: CREATE TABLE records7
(name NOT NULL PRIMARY KEY); ---> NOT NULL MAY OR MAY NOT BE USED WITH PRIMARY KEY

(OR)

CREATE TABLE records7
(name PRIMARY KEY); #PRIMARY KEY ALSO ACTS LIKE NOT NULL

=====

#DEFAULT CONSTRAINT

CODE: CREATE TABLE records8(name DEFAULT 'I AM')

INSERT INTO records8 VALUE();

/* IN THIS CASE THE DEFAULT VALUE 'I AM' WILL BE ADDED */

SELECT * FROM records8;

OUTPUT:

```
+-----+  
| name |  
+-----+  
| I AM |  
+-----+
```

NOTE: THE MAX SIZE OF DEFAULT VALUE IS 10;
AS WE DID NOT INCLUDE ANY VALUE WHILE ADDING RECORDS THE DEFAULT VALUE 'I AM' WAS INSERTED

=====

#CHECK CONSTRAINT---> CAN BE USED WHEN YOU WANT TO ALLOW CONSTRAINTS BASED ON CERTAIN LIMIT

CODE: CREATE TABLE records9
(name varchar(10) ,
age integer CHECK(age > 18)) #IT ONLY ALLOWS VALUES GREATER THAN 18 IN THE age COLUMN

CHECK(column_1 < column_2) ---> CAN BE USED TO COMPARE TWO COLUMNS

name varchar(10) CHECK(name in ('ram' , 'som' , 'ramu'))

BETWEEN , LOGICAL OPERATOR AND OTHER OPERATORS CAN BE USED.

=====

#FOREIGN KEY CONSTARINT

#FOREIGN KEY IS LIKE PRIMARY KEY. IT IS USED IN RDBMS.

#SO FAR WE HAVE ONLY SEE DBMS.

DBMS ---> Database Management System
RDBMS ---> Relational Database Management System

IN RDBMS TABLES ARE IN RELATION WITH EACH OTHER BUT IN DBMS TABLES ARE NOT IN RELATION WITH EACH OTHER.

DBMS

DATABASE NAME: RDBMS

id	name	age
1	ram	10
2	sam	20
3	ram	30

TABLE NAME: AGE

id	name	gender
2	sam	male
1	ram	female
3	ram	male

TABLE NAME: GENDER

AS YOU CAN SEE BOTH THE TABLES ARE RELATED TO EACH OTHER BY THE ID COLUMN

id column in table AGE is called the primary key and id in table GENDER is called primary key

id column is called as the foreign key as it is used to relate the two tables AGE AND GENDER.

WE can even choose the gender column as the primary key but we can't choose it as foreign key as it is not present in the age table.

DATABASE DBMS:

weight	name	age
40	ram	10
50	sam	male
60	ram	male

TABLE NAME: AGE

id	name	gender
2	sam	male
1	ram	female
3	ram	male

TABLE NAME: GENDER

TWO TABLES ARE NOT RELATED TO EACH OTHER SO IT IS CALLED AS DBMS

=====

#FIRST LET US CREATE A PARENT TABLE WITH A PRIMARY KEY sno

CODE: CREATE TABLE parent(sno integer NOT NULL PRIMARY KEY)

#NOW LET US CREATE A CHILD TABLE WITH A FOREIGN KEY sno AND id AS PRIMARY KEY

CODE: CREATE TABLE child

(sno integer NOT NULL PRIMARY KEY,

sno integer REFERENCES parent (sno))

#If we skip sno MySQL will reference the primary key of the table parent by default

=====

#ON DELETE CASCADE

#FIRST LET US CREATE A PARENT TABLE WITH A PRIMARY KEY sno

CODE: CREATE TABLE parent(sno integer NOT NULL PRIMARY KEY)

#NOW LET US CREATE A CHILD TABLE WITH A FOREIGN KEY sno AND id AS PRIMARY KEY

CODE: CREATE TABLE child

(sno integer NOT NULL PRIMARY KEY,

sno integer REFERENCES parent (sno)) ON DELETE CASCADE

ON DELETE CASCADE:

--> To be used when you want the related rows in child table to get deleted when the row gets deleted in the parent table

--> For example let's say a row you deleted a row in the parent table all the related row which are present in the child will get deleted auto

```
=====
#ON UPDATE CASCADE

#FIRST LET US CREATE A PARENT TABLE WITH A PRIMARY KEY sno
CODE: CREATE TABLE parent(sno integer NOT NULL PRIMARY KEY)

#NOW LET US CREATE A CHILD TABLE WITH A FOREIGN KEY sno AND id AS PRIMARY KEY
CODE: CREATE TABLE child
      (sno integer NOT NULL PRIMARY KEY,

      sno integer REFERENCES parent (sno)) ON UPDATE CASCADE
      -----
ON UPDATE CASCADE:

--> To be used when you want the changes in the parent table to reflect back in the child table(only related rows get updated with the new chan

--> For example let''s say you update a row in the parent table all the related row which are present in the child table will get updated with
```

TABLE CONSTRAINTS

```
#TABLE CONSTRAINTS ---> CONSTRAINT APPLIED TO MULTIPLE COLUMNS

CODE: CREATE TABLE t1
      (age integer,
      name VARCHAR(10) NOT NULL,
      email VARCHAR(20) NOT NULL
      UNIQUE(name , email)); #UNIQUE CONTRAINT WILL BE APLLIED TO name and email column
      FOREIGN KEY(sno) REFERENCES records(sno)
```

NAMED CONSTRAINTS

```
#ASSIGNING NAME TO CONSTRAINTS

MySQL my default assigns name to constraints in the format SYS_Cn , where n is an integer
For eg: SYS_C123456 , SYS_C654321

But we can force change the name of the constraint

SYNTAX: CONSTRAINT the_name_you_want constraint_name;
CODE: CREATE TABLE students (
      id INTEGER CONSTRAINT new_name PRIMARY KEY,
      NAME varchar(15)
      );

#DEFAULT NAME OF PRIMARY KEY CONSTRAINT HAS BEEN CHANGED TO new_name
#
```

TABLE CREATION FROM EXISITNG TABLE

#CREATING TABLE FROM EXISTING TABLE

#METHOD 1:(INSERT AND SELECT)

#table_2 should be created earlier

#column datatype and count in records should match column datatype in table_2

CODE: INSERT INTO table_2

SELECT student_name FROM records; #RECORDS IN records ---> COPIED TO TABLE_2

#METHOD 2:(AS SELECT)

CODE: CREATE TABLE T2 AS

SELECT student_name , year FROM records; #USE OF AS IS OPTIONAL

```
+-----+-----+
| student_name | year |
+-----+-----+
| ram          | 2004 |
| sam          | 2003 |
| hari         | 2002 |
| ramu         | 2004 |
+-----+-----+
```

THE ABOVE RECORDS WILL BE STORED IN BOTH THE CASE

UPDATE

SYNTAX: UPDATE table_name

SET column_name = value;

#TO UPDATE ALL THE RECORDS IN A COLUMN

CODE: UPDATE records

SET year = 2000;

TABLE:

```
+-----+-----+-----+-----+-----+
| sno | student_name | email          | year | column_name |
+-----+-----+-----+-----+-----+
| 1 | ram          | ram@gmail.com  | 2000 | 10 |
| 2 | sam          | sam@yahoo.com  | 2000 | 20 |
| 3 | hari         | hari@outlook.com | 2000 | 30 |
| 4 | ramu         | ramu@gmail.com | 2000 | 20 |
+-----+-----+-----+-----+-----+
```

#TO UPDATE A PARTICULAR RECORD

WE CAN USE WHERE TO ACHIEVE THIS TASK

CODE: UPDATE records

SET year = 2000

WHERE student_name = "ram";

TABLE:

```
+-----+-----+-----+-----+-----+
| sno | student_name | email          | year | column_name |
+-----+-----+-----+-----+-----+
| 1 | ram          | ram@gmail.com  | 2000 | 10 | #2004 TO 2000
| 2 | sam          | sam@yahoo.com  | 2003 | 20 |
| 3 | hari         | hari@outlook.com | 2002 | 30 |
| 4 | ramu         | ramu@gmail.com | 2004 | 20 |
+-----+-----+-----+-----+-----+
```

SET column_name = 2000 + value #USING EXPRESSION

DELETE VS TRUNCATE (ROW OPERATION)

```
# BOTH DELETE AND TRUNCATE ARE USED TO DELETE ROWS AND ROWS , COLOUMNS RESPECTIVELY BUT THE TABLE NAME STILL EXIST
#BUT DROP IS USED TO DELETE THE TABLE COMPLETELY [TABLE_NAME + ALL THE ROWS AND COLUMNS] OR A PARTICULAR COLUMN
=====
```

```
#TO DELETE ALL THE ROWS FROM A TABLE USING DELETE
```

```
SYNTAX: DELETE FROM table_name;
```

```
CODE: DELETE FROM records;
```

```
OUTPUT: Query OK, 0 rows affected (1.57 sec)
```

```
TABLE: Empty set (0.00 sec)
```

```
#THE ABOVE CODE DELETES ALL THE ROWS AND COLUMNS BUT THE TABLE IS STILL THERE
=====
```

```
#TO DELETE ALL THE ROWS FROM A TABLE USING TRUNCATE
```

```
SYNTAX: TRUNCATE table_name;
```

```
CODE: TRUNCATE records;
```

```
OUTPUT: Query OK, 0 rows affected (1.12 sec)
```

```
TABLE: Empty set (0.00 sec)
```

```
#THE ABOVE CODE DELETES ALL THE ROWS AND COLUMNS BUT THE TABLE IS STILL THERE
=====
```

```
#TO DELETE A PARTICULAR ROW FROM A TABLE USING DELETE
```

```
SYNTAX: DELETE FROM table_name
```

```
WHERE condition
```

```
CODE: DELETE FROM records
```

```
WHERE name = 'ram';
```

```
TABLE:
```

```
+-----+-----+-----+-----+-----+
| sno | student_name | email | year | column_name |
+-----+-----+-----+-----+-----+
| 2 | sam | sam@yahoo.com | 2003 | 20 |
| 3 | hari | hari@outlook.com | 2002 | 30 |
| 4 | ramu | ramu@gmail.com | 2004 | 20 |
+-----+-----+-----+-----+-----+
=====
```

```
#TO DELETE A PARTICULAR ROW FROM A TABLE USING TRUNCATE
```

```
WE CAN'' DO THAT USING TRUNCATE
```

DELETE VS TRUNCATE

image-20220113005614894

SOURCE: t-sibiraj.github.io/sql

ROLLBACK

THE FOLLOWING CONCEPT IS (/*OUT OF SYLLABUS */)

OUT OF SYLLABUS ----- OUT OF SYLLABUS ----- OUT OF SYLLABUS ---- OUT OF SYLLABUS -----

#WHEN WE DO SOME CHANGES ,WE CAN UNDO THE CHANGES IF WE USE DELETE, WHICH WE CAN'T DO WHEN WE USE TRUNCATE

commit ---> to be used to save changes

rollback --> like the undo button which we can use to rollback the changes

```
CODE: mysql>DELETE FROM records
        WHERE year = 2004;
```

```
mysql> COMMIT
```

```
mysql> ROLLBACK
```

#now we can undo the last transaction. The commit acts like an checkpoint to which we can revert back using ROLLBACK

OUT OF SYLLABUS ----- OUT OF SYLLABUS ----- OUT OF SYLLABUS ---- OUT OF SYLLABUS -----

ALTER

```
SYNTAX: ALTER TABLE table_name
        clause_name name
```

ADD

#TO ADD A COLUMN

SYNTAX: ALTER TABLE table_name
ADD column_name datatype(size) CONSTRAINT constraint_name; size and constraint --> optional

CODE: ALTER TABLE records
ADD (result integer); #USE OF () IS OPTIONAL WHILE ADDING SINGLE COLUMN

TABLE:

sno	student_name	email	year	column_name	result
1	ram	ram@gmail.com	2004	10	NULL
2	sam	sam@yahoo.com	2003	20	NULL
3	hari	hari@outlook.com	2002	30	NULL
4	ramu	ramu@gmail.com	2004	20	NULL

#TO ADD MULTIPLE COLUMN

CODE: ALTER TABLE records
ADD (maths integer , computer_science integer);

TABLE:

sno	student_name	email	year	column_name	result	maths	computer_science
1	ram	ram@gmail.com	2004	10	NULL	NULL	NULL
2	sam	sam@yahoo.com	2003	20	NULL	NULL	NULL
3	hari	hari@outlook.com	2002	30	NULL	NULL	NULL
4	ramu	ramu@gmail.com	2004	20	NULL	NULL	NULL

#TO ADD A COLUMN WITH A CONSTRAINT

CODE: ALTER TABLE records
ADD (physics integer NOT NULL);

WE HAVE DELETED ALL THE COLUMNS WHICH HAS NULL VALUE BEFORE ADDING PHYSICS COLUMN

TABLE:

sno	student_name	email	year	column_name	physics
1	ram	ram@gmail.com	2004	10	0
2	sam	sam@yahoo.com	2003	20	0
3	hari	hari@outlook.com	2002	30	0
4	ramu	ramu@gmail.com	2004	20	0

#0 IS ADDED BY DEFAULT AS WE HAVE ADDED NOT NULL CONSTARINT

CHANGE

SYNTAX: ALTER TABLE table_name
CHANGE name

CHANGE:

---> Can rename a column and change its definition, or both.

#TO CHANGE THE COLUMN NAME

SYNTAX: ALTER TABLE table_name
CHANGE old_column_name new_column_name datatype(size) CONSTRAINT constraint_name;

CODE: ALTER TABLE records
CHANGE physics description varchar(250);

TABLE:

sno	student_name	email	year	column_name	description
1	ram	ram@gmail.com	2004	10	0
2	sam	sam@yahoo.com	2003	20	0
3	hari	hari@outlook.com	2002	30	0
4	ramu	ramu@gmail.com	2004	20	0

MODIFY

MODIFY:

---> Can change a column definition but not its name.

#TO CHANGE THE COLUMNS DATATYPE

SYNTAX: ALTER TABLE table_name
MODIFY column_name datatype(size);

CODE: ALTER TABLE records
MODIFY description varchar(50); #THE DATATYPE CHANGES FROM varchar(250) TO varchar(50)

TABLE:

Field	Type	Null	Key	Default	Extra
sno	int	YES		NULL	
student_name	varchar(10)	YES		NULL	
email	varchar(20)	YES		NULL	
year	int	YES		NULL	
column_name	int	YES		NULL	
description	varchar(50)	YES		NULL	

=====

#TO CHANGE THE ORDER OF THE COLUMN

SYNTAX: ALTER TABLE table_name
MODIFY column_name datatype(size) FIRST ...;

SYNTAX: ALTER TABLE records
MODIFY description varchar(50) FIRST;

ADD

#TO ADD A CONSTRAINT

SYNTAX: ALTER TABLE table_name
ADD constraint_name(column_name);

CODE: ALTER TABLE records
ADD PRIMARY KEY(sno); #sno column ---> will be treated as primary key

TABLE:

Field	Type	Null	Key	Default	Extra
description	varchar(50)	YES		NULL	
sno	int	NO	PRI	NULL	
student_name	varchar(10)	YES		NULL	
email	varchar(20)	YES		NULL	
year	int	YES		NULL	
column_name	int	YES		NULL	

DROP

#TO REMOVE A COLUMN

SYNTAX: ALTER TABLE table_name
DROP column_name;

CODE: ALTER TABLE records
DROP description; #description column ---> deleted

TABLE:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

#TO REMOVE THE PRIMARY KEY

SYNTAX: ALTER TABLE table_name
DROP PRIMARY KEY;

CODE: ALTER TABLE records
DROP PRIMARY KEY; #sno will no longer be primary key

TABLE:

Field	Type	Null	Key	Default	Extra
sno	int	NO		NULL	
student_name	varchar(10)	YES		NULL	
email	varchar(20)	YES		NULL	
year	int	YES		NULL	
column_name	int	YES		NULL	

#TO REMOVE THE FOREIGN KEY

SYNTAX: ALTER TABLE table_name
DROP constraint_name column_name;

CODE: ALTER TABLE records
DROP FOREIGN KEY email; #email will no longer be foreign key

#CASCADE

CODE: ALTER TABLE table_name
DROP PRIMARY KEY CASCADE;

#When we use CASCADE it removes(drops) any foreign key which references the primary key

GROUP BY(COMING SOON)(IMPORTANT)

#GROUP BY IS AN MULTIPLE ROW FUNTION LIKE AGGREGATE FUNCTION

JOINS

WE CAN ALSO ACCESS COLUMNS BY USING THE BELOW FORMAT

```
table_name.column_name ----> .(dot)
alias_table_name.column_name ----> .(dot)
```

```
column_name
alias_column_name
```

JOIN ---> JOIN is nothing but a query which can be used to combine rows from two or more tables

CARTESIAN PRODUCT

LET US CONSIDER THE TABLES BELOW

TABLE NAME: records					
sno	student_name	email	year	column_name	
1	ram	ram@gmail.com	2004	10	
2	sam	sam@yahoo.com	2003	20	
3	hari	hari@outlook.com	2002	30	
4	ramu	ramu@gmail.com	2004	20	

TABLE NAME: test_table

name	year	present
ram	2004	NULL
NULL	NULL	NULL
sam	2001	absent

CARTESIAN PRODUCT IS NOTHING BUT UNSRESTRICTED JOIN

TABLE STRUCTURE OF records:

```
records
|
|____ sno
|
|____ student_name
|
|____ email
|
|____ year
|
|____ column_name
```

TABLE STRUCTURE OF test_table

```
test_table
|
|____ name
|
|____ year
|
|____ present
```

In SQL we can write the Cartesian product of records and test_table as follows

```
CODE: SELECT *
      FROM records, test_table
```

#Now the a total 15 records will be shown (5 * 3)

#Each row in records table will be multiplied with all the row from test_table

image-20220113030716529

SOURCE: t-sibiraj.github.io/sql

AS you can see the row 1,ram,ram@gmail.com,2004 from table records is multiplied with all the rows of the table test_table which is colour coded in blue

A MORE SIMPLE VERSION IS GIVEN BELOW

```
CODE: SELECT student_name , present
      FROM records , test_table;
```

----> student_name [cartesian product] present

image-20220113031336907

SOURCE: t-sibiraj.github.io/sql

As you can see above row ram is multiplied with all the three rows present in the ****present column****. And the same is repeated with sam , hari

```
ram * ( absent + NULL + NULL)
sam * (absent + NULL + NULL)
hari * (absent + NULL + NULL)
ramu * (absent + NULL + NULL)
```

THE ORDER WOULD HAVE BEEN CHANGED IF THE COLUMN present WAS WRITTEN BEFORE THE name column.

TABLE ALIASES

#TABLE ALIASES

LIKE COLUMN ALIASES WE CAN HAVE ALIAS NAME FOR TABLES TOO

```
SYNTAX: SELECT table_alias_1.coloumn_name , table_alias_2
      FROM tabel_name_1 table_alias_1 , table_name_2 table_alias_2;
```

CONSIDER THE TABLES BELOW

TABLE NAME: records					
sno	student_name	email	year	column_name	
1	ram	ram@gmail.com	2004	10	
2	sam	sam@yahoo.com	2003	20	
3	hari	hari@outlook.com	2002	30	
4	ramu	ramu@gmail.com	2004	20	

TABLE NAME: test_table

name	year	present
ram	2004	NULL
NULL	NULL	NULL
sam	2001	absent

TABLE NAME: test_table_3

sno	student_name	email	year_of_birth	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

```
CODE: SELECT a1.student_name , a2.year_of_birth
      FROM records a1 , test_table_3 a2;
```

OUTPUT:

student_name	year_of_birth
ramu	2004
hari	2004
sam	2004
ram	2004
ramu	2003
hari	2003
sam	2003
ram	2003
ramu	2002
hari	2002
sam	2002
ram	2002
ramu	2004
hari	2004
sam	2004
ram	2004

#WE CAN AVOID THE ABOVE SITUATION USING WHERE CLAUSE

```
CODE: SELECT a1.student_name , a2.year_of_birth
      FROM records a1 , test_table_3 a2
      WHERE a1.sno = a2.sno;
```

OUTPUT:

student_name	year_of_birth
ram	2004
sam	2003
hari	2002
ramu	2004

WE CAN ALSO OTHER CONDITION WITH WHERE CLAUSE

EQUI - JOIN

#EQUI - JOIN

--> Columns are compared for equality
 --> Duplicate columns are not eliminated

PIP

SIMPLE DEFINITION:

Think of **PyPI** as a place where people upload their **python libraries and modules**
 Like a **website** where people upload **education material**

We can use the **pip** to install the **libraries** uploaded by the people on PyPI in our computer
 We can use our **browser** to download the **education material** uploaded by others on the website in our computer

FORMAL DEFINITION:

The Python Package Index (PyPI) is a repository of software for the Python programming language.
 (source: <https://pypi.org/>)

repository: storage location for software packages

PIP is nothing but a package management system. It is used to download libraries , modules created by other people which they have uploaded to

image-20220113034025814

SOURCE: pypi.org

```
#STEPS TO INSTALL PYTHON LIBRARIES FROM PyPI IN WINDOWS:
```

1. OPEN CMD WITH ADMINISTER PRIVILLEDGE
2. TO CHECK IF PIP IS INSTALLED TYPE EITHER pip or pip3 #either should work
3. TYPE pip install name_of_the_package or pip3 install name_of_the_package

```
#WE NEED mysql-connector-python and pymysql libraries to work the sql from python
```

- 4.pip install mysql-connector-python
- 5.pip install pymysql

```
#Module name aliasing
```

```
>>>import math as m    #we can use m or whatever identifier name (identifier naming rules apply)
>>> m.floor(1.2)
1
```

```
#Importing a particular function from a module
```

```
>>>from math import floor
>>>floor(1.2)
1
```

```
#Importing every funtion from a module
```

```
>>>from math import *
>>>floor(1.2)
1
>>>ceil(1.2)
2
```

MYSQL CONNECTOR

```
#import the module
```

```
import mysql.connector as connector
```

CONNECTING TO MySQL DATABASE

SYNTAX:

```
variable_name = mysql.connector.connect(host="host_name",
                                         user="user_name",
                                         passwd = "your_password",
                                         database = name_of_the_database)
```

host ---> It is the host name or the IP address of the database server. As our database is a local database we can use localhost

user ---> the username you have on MySQL

password ---> the password which you have set

database ---> this is optional. You should key in the name of the database

#mysql.connector as connector

```
CODE: connection = connector.connect(host="localhost", user="root", passwd = "root",
                                     database = "db")
```

#TO CHECK IF THE CONNECTION TO THE DATABASE IS SUCCESSFUL WE CAN USE .is_connected() METHOD

SYNTAX: connection_object.is_connected() ---> True ----> Successfully Connected
---> False ----> Unsuccessful Connection

CODE:

```
>>> connector.is_connected()
```

True

CREATING A CURSOR INSTANCE

#WE MUST USE CURSOR IF WE WANT TO PERFORM ROW BY ROW PROCESSING

#The output for our query get stored in the cursor we can access single or multiple rows at a time from it .(This will get clear when we study

#The output for our query is called the resultset

```
#import mysql.connector as connector
#connection = connector.connect(details)
```

SYNTAX: cursor_object = connection_object.cursor()

CODE: cursor = connection.cursor()

RECORDS TABLE:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

EXECUTING QUERIES


```
SYNTAX: cursor_object.execute(your_sql_query)
```

```
CODE: cursor.execute("SELECT * FROM records")
```

Note: -> The output that is retrieved, to be precise the resultset is now stored in the cursor
-> result set ---> output for your query

```
#We need to include the query within quotes and pass that string to cursor.execute()
```

ACCESSING STORED RESULTSET(OUTPUT) FROM THE CURSOR_OBJECT

```
#fetchall() ---> RETURNS ALL THE ROW FROM THE RESULT SET(OUTPUT FOR YOUR QUERY)
```

```
CODE:  
print(cursor.fetchall)
```

```
OUTPUT:  
[(1, 'ram', 'ram@gmail.com', 2004, 10), (2, 'sam', 'sam@yahoo.com', 2003, 20), (3, 'hari', 'hari@outlook.com', 2002, 30), (4, 'ramu', 'r
```

```
#resultset is in the form of a list of rows(these rows are in the form of tuples)
```

```
***NOTE: ONCE WE USE FETCH ALL WE NEED TO AGAIN EXECUTE THE QUERY USING cursor.execute(query)**
```

```
=====
```

```
#STORING THE RESULT SET IN A VARIABLE
```

```
CODE:  
cursor.execute("SELECT * FROM records")  
resultset = cursor.fetchall() #resultset is in the form of a list  
print(resultset)
```

```
OUTPUT:  
[(1, 'ram', 'ram@gmail.com', 2004, 10), (2, 'sam', 'sam@yahoo.com', 2003, 20), (3, 'hari', 'hari@outlook.com', 2002, 30), (4, 'ramu', 'r
```

```
=====
```

```
#ACCESSING INDIVIDUAL ROWS
```

```
CODE:  
cursor.execute("SELECT * FROM records")  
row1 = cursor.fetchall()[0]  
print(row1)
```

```
OUTPUT:  
(1, 'ram', 'ram@gmail.com', 2004, 10)
```

```
=====
```

```
#TRAVERSING AND PRINTING ALL THE ROWS
```

```
CODE:  
cursor.execute("SELECT * FROM records")  
rows = cursor.fetchall()  
for row in rows:  
    print(row)
```

```
OUTPUT:  
(1, 'ram', 'ram@gmail.com', 2004, 10)  
(2, 'sam', 'sam@yahoo.com', 2003, 20)  
(3, 'hari', 'hari@outlook.com', 2002, 30)  
(4, 'ramu', 'ramu@gmail.com', 2004, 20)
```

#fetchmany() ---> Can be use to retrieve a particular number of rows

#RETRIEVE 2 RECORD FROM record TABLE

CODE:

```
cursor.execute("SELECT * FROM records")
two_record = cursor.fetchmany(2)
print(two_record)
```

OUTPUT:

```
[(1, 'ram', 'ram@gmail.com', 2004, 10), (2, 'sam', 'sam@yahoo.com', 2003, 20)]
```

#NOTE: The rows are in the form of a tuple inside a list

#WE CAN'T AGAIN FETCH THE FIRST TWO RECORDS. TO DO THAT WE SHOULD AGAIN EXECUTE QUERY FROM FIRST

=====

CODE:

```
cursor.execute("SELECT * FROM records")
two_record = cursor.fetchmany(2)      #first two rows
print(two_record)
next_two_record = cursor.fetchmany(2)  #last two rows
print(next_two_record)
no_more_rows = cursor.fetchmany(2)    #As there is no more row to fetch , empty list is stored
print(no_more_rows)
```

OUTPUT:

```
[(1, 'ram', 'ram@gmail.com', 2004, 10), (2, 'sam', 'sam@yahoo.com', 2003, 20)]
[(3, 'hari', 'hari@outlook.com', 2002, 30), (4, 'ramu', 'ramu@gmail.com', 2004, 20)]
[]
```

#fetchone() ---> Can be used when we want to fetch one single row

#FETCH A ROW FROM records TABLE

CODE:

```
cursor.execute("SELECT * FROM records")
only_one_row = cusor.fetchone()
print(only_one_row)
```

OUTPUT:

```
(1, 'ram', 'ram@gmail.com', 2004, 10)
```

rowcount()

```
#rowcount() ---> Can be used to know how many records(rows) have been retrieved so far
-----> It takes account of the previous retrievals
```

CODE:

```
cursor.execute("SELECT * FROM records")

row1 = cursor.fetchone()
print("Rows(records) retrieved so far",cursor.rowcount()) #1

row2 = cursor.fetchone()
print("Rows(records) retrieved so far",cursor.rowcount()) #2

row3 = cursor.fetchmany(2)
print("Rows(records) retrieved so far",cursor.rowcount()) #4
```

OUTPUT:

```
Rows(records) retrieved so far 1
Rows(records) retrieved so far 2
Rows(records) retrieved so far 4
```

=====

#IF YOU RUN INTO ERROR:

DOCS:

1. <https://dev.mysql.com/doc/connector-python/en/connector-python-tutorial-cursorbuffered.html>
2. <https://dev.mysql.com/doc/connector-python/en/connector-python-api-mysqldb-cursor-rowcount.html>

FORUMS:

1. <https://stackoverflow.com/questions/29772337/python-mysql-connector-unread-result-found-when-using-fetchone>
2. <https://arrayoverflow.com/question/python-mysql-connector-errors-internalerror-unread-result-found/3196>

connection_name.close()

```
#After retrieving the records and using the database we must close the connection
```

```
#To do that use the following command
```

```
connection.close()
```

PYMYSQL

WE CAN DO SAME WITH ANOTHER LIBRARY CALLED PYMYSQL

pymysql vs mysql.connector:

- > pymysql purely written in python and made by python
- > mysql.connector made by oracle

```

#import pymysql

import pymysql as pym

#TO CREATE A CONNECTION(i.e TO CONNECT TO A DATABASE)

SYNTAX: connection_name = pymysql.connect("host_name" , "user_name" , "password" , "database")
CODE:    connection      = pym.connect(      "localhost" ,   "root"           , "root"           , "db")

#TO TEST IF THE CONNECTION TO THE DATABASE WAS SUCCESSFULL
connection.is_connected()

NOTE: THE THE FOLLOWING STEPS ARE SAME LIKE mysql.connector library
#TO CREATE A CUROSR OBJECT
cursor = connection.cursor()

#TO EXECUTE QUERIES
cursor.execute("SELECT * FROM records")

#TO FETCH ROWS FROM RESULT SET(OUTPUT)
rows = cursor.fetchmany()

#TO DISPLAY THE ROWS(RECORDS)
for row in rows:
    print(rows)

#ROWCOUNT()
count = cursor.rowcount()

```

PARAMETERISED QUERIES

We provide some parameters or values from outside(by using function like input()) to run few queries

These queries are called as parameterised queries

STRING FORMATTING

Before we learn about parameterised queries we must know what string formatting is.

#NEW WAY TO FORMAT STRINGS

"{}".format() --> Value inside the bracket gets substituted in the set bracket
 --> The set brackets are called as placeholders

```

>>>details = "My name is {} and I am {} years old".format("ram" , 20)
>>>print(details)
My name is ram and I am 20 years old
#ram goes into the first set bracket and 20 into the second

```

```

>>>details = "My name is {} and I am {} years old".format(20,"ram")
>>>print(details)
My name is 20 and I am ram years old
#20 goes into the first set bracket and ram into the second
=====

```

```

>>>details = "My name is {0} and I am {1} years old".format("ram" , 20)
>>>print(details)
My name is ram and I am 20 years old
#ram is in zeroth index and 20 is in 1st index

```

```

>>>details = "My name is {1} and I am {0} years old".format(20,"ram")
>>>print(details)
My name is 20 and I am ram years old
'''ram is in zeroth index and 20 is in 1st index. As we have used 1st index first , the value in the 1st index ("ram") gets substituted in the
=====

```

```
>>>details = "My name is {name} and I am {age} years old".format(age = 20,name = "ram")
>>>print(details)
My name is ram and I am 20 years old
#now we have named the placeholder values as name and age.
```

=====

Example:

#Write a program in python where you should get year from the user and display the details of the that student whose year is greater than t

CODE:

```
import mysql.connector as connector
connection = connector.connect(host="localhost", user="root", passwd = "root", database = "db")
cursor = connection.cursor()
year = input("Enter the year:")
cursor.execute("SELECT * FROM records WHERE year > {}".format(year))
print(cursor.fetchall())
connector.close()
```

OUTPUT:

```
Enter the year:2003
[(1, 'ram', 'ram@gmail.com', 2004, 10), (4, 'ramu', 'ramu@gmail.com', 2004, 20)]
```

#OLD WAY TO FORMAT STRINGS

#This type of formating is used in C language

```
%s ---> To be used with string (can also be used with numbers)
%d ---> To be used with integers
%f ---> To use used with float
```

%char acts like {}

CODE:

```
name = "ram"
age = 20
print("My name is %s and I am %d years old." % (name, age))
```

OUTPUT:

```
My name is ram and I am 20 years old
```



cursor.commit()

```
#We should use cursor.commit() whenever we do some changes in the databse

#So far we have only been retrieving the records(rows) from the database

#But when we execute queries which modify the database we must use the cursor.commit() to save changes in the database()

cursor.commit()
```

INSERTING RECORDS USING MYSQL.CONNECTOR()

```

#Creating a cursor
import mysql.connector as connector
connection = connector.connect(host="localhost", user="root", passwd = "root", database = "db")
cursor = connection.cursor()

#we should use cursor.commit() ---> As we are changing the database(i.e inserting records)

#inserting records

cursor.execute("INSERT INTO records Values(1, 'som', 'som@gmail.com' ,2005 ,40)")
cursor.commit()
connector.close()
=====
(OR)
=====

query = "INSERT INTO records Values(1, 'som', 'som@gmail.com' ,2005 ,40)"
cursor.execute(query)
cursor.commit()
connector.close()
=====
(OR)
=====

#Using parameterised queries

#getting the input
sno = int(input("Enter the sno:"))
name = input("Enter the student name:")
email = input("Enter the email:")
year = int(input("Enter the year of birth:"))
column_name = int(input("Enter the column_name value:"))

#executing query
query = "INSERT INTO records Values({}, {} , {} , {} , {})".format(sno,name,email,year,column_name)
cursor.execute(query)
cursor.commit()
connector.close()
#We need to include the query within quotes and pass that string to cursor.execute()

```

UPDATING RECORDS USING MYSQL.CONNECTOR()

```

#Creating a cursor
import mysql.connector as connector
connection = connector.connect(host="localhost", user="root", passwd = "root", database = "db")
cursor = connection.cursor()

#UPDATING RECORDS

query = '''UPDATE records SET year = 2004
        WHERE year = 2002 '''          #year 2002 gets updated with a value of 2004
cursor.execute(query)
cursor.commit()                        #use commit() to save changes
connector.close()

=====
(OR)
=====

#Using parameterised queries
year_old = int(input("Enter the year which needs to be updated:"))
year_new = int(input("Enter the new value for the year:"))

query = "UPDATE record SET year = {} WHERE year = {}".format(year_old , year_new)
cursor.execute(query)
cursor.commit()
connector.close()

```

DELETING RECORDS USING MYSQL.CONNECTOR()

```
#Creating a cursor
import mysql.connector as connector
connection = connector.connect(host="localhost", user="root", passwd = "root", database = "db")
cursor = connection.cursor()

#DELETING RECORDS

query = "DELETE FROM records WHERE name = 'ram' "
cursor.execute(query)
cursor.commit()
connector.close()
#We should use commit() as we are modifying the database. To save changes we should use cursor.commit()

=====
                                (OR)
=====

#using parameterised queries

name = input("Enter the name of student whose record you wish to be deleted:")
query = "DELETE FROM records WHERE name = {}".format(name)
cursor.execute(query)
cursor.commit()
connector.close()
```

SIMILARITY BETWEEN mysql.connector() and python

```
fetchall()    ---> readallines()
fetchone()    ---> readline()
fetchmany(n)  ---> read(n).split()
```

all the fetch method works in linear fashion

once we access the first two rows we have only access to the next rows not the previous rows

when you open a text file and add or delete some data it's the same like adding or deleting records using execute

But we must hit the save button before closing the text file to save the changes. If we don't do that our changes won't get updated in the text file

connector_name.close() ---> It is the same like closing the text file which we have opened.



TABLES USED

records:

sno	student_name	email	year	column_name
1	ram	ram@gmail.com	2004	10
2	sam	sam@yahoo.com	2003	20
3	hari	hari@outlook.com	2002	30
4	ramu	ramu@gmail.com	2004	20

records3:

name	year	present
ram	2001	present
sam	2002	present
ramu	2003	NULL

test_table:

name	year	present
ram	2004	NULL
NULL	NULL	NULL
sam	2001	absent

test_table_2:

name	year	present
ram	2001	NULL
sam	2002	present
ramu	2003	present
som	2004	absent

DATABASE PORTION FOR TERM - II

(I) Database concepts: introduction to database concepts and its need

(II) Relational data model: relation, attribute, tuple, domain, degree, cardinality, keys (candidate key, primary key, alternate key, foreign key)

(III) Structured Query Language: introduction, Data Definition Language and Data Manipulation Language, data type (char(n), varchar(n), int, float, date), constraints (not null, unique, primary key), create database, use database, show databases, drop database, show tables, create table, describe table, alter table (add and remove an attribute, add and remove primary key), drop table, insert, delete, select, operators (mathematical, relational and logical), aliasing, distinct clause, where clause, in, between, order by, meaning of null, is null, is not null, like, update command, delete command

(IV) Aggregate functions (max, min, avg, sum, count), group by, having clause, joins : Cartesian product on two tables, equi-join and natural join

(V) Interface of python with an SQL database: connecting SQL with Python, performing insert, update, delete queries using cursor, display data by using fetchone(), fetchall(), rowcount, creating database connectivity applications

- [x] PYTHON
- [x] NETWORKING
- [x] SQL