



Home / Page Types / Floorplans / Object Page Floorplan

Object Page Floorplan

SAPUI5

Information

This floorplan is available with [SAP Fiori elements](#).

For information on the default settings and other options for the SAP Fiori element implementation, see the topics for the object page [overview](#), [header](#), [content area](#), and [footer bar](#) in the *SAP Fiori Elements Framework* section.

To explore the design capabilities of SAP Fiori elements for OData V4 and experiment with their behavior, see [Object Page](#) in the [SAP Fiori development portal](#).

Intro

The object page floorplan is used to display and categorize all relevant information about an object. Categorized content can be accessed quickly using anchor or tab navigation, and users can switch from display to edit mode to change the content. To create a new object, users can switch to create mode.

The object page floorplan comes with a flexible, responsive layout and a [dynamic page header](#) that can be adapted to display simple and complex business objects. This allows you to adjust the layout to a wide range of use cases.

Feedback



Design System for Web



Manufacturer: Robotech
Factory: Orlando, FL
Supplier: Robotech (234242343)

Status

Delivery

Delivery Time
12 days

Assembly Option

To Be Selected

Leasing Installment

379.99 USD

General Information

Assembly Options

Contact Information

Order Details

Order ID:
589946637

Contract:
10045876

Expected Delivery Date:
January 25, 2023

Transaction Date:
August 6, 2022

Configuration Details

Model:
Robot Arm Series 9

Color:
White (default)

Socket:
Default Socket 10

Leasing Installment:
379.99 USD per month

Axis:
6 Axis

Assembly Options

Products

Search



Create

Delete



Document Number	Company	Contact Person	Posting Date	Amount (Local Currency)
10223882001820	Jologa	Denise Smith	11/15/21	12,897.00 EUR >
10223882002198	Exotic Liquids	Paul Blevins	11/18/21	234,197.00 EUR >
21718318237193	Lyngbysild	Candice Brown	11/21/21	11,865.99 EUR >
23797812373652	DelBont Industries	Richard Wilson	11/21/21	13,127.00 EUR >
24372738237827	Jologa	Denise Smith	11/23/21	12,897.00 EUR >
25717388235263	Exotic Liquids	Paul Blevins	11/25/21	12,897.00 EUR >
25738726535211	DelBont Industries	Richard Wilson	11/28/21	12,897.00 EUR >

Object page floorplan

⚠ Warning

- Always build the object page using the **dynamic page header** and not the former object page header. Using the old object page header creates issues that can't be fixed retrospectively. Using the dynamic header will also ensure consistency across all floorplans and provide greater flexibility. For details, see the [Header](#) section below.
- **Do not use the current implementation of the “page variant” feature** in SAP Fiori elements. This feature is technically available for object pages, but we are still working on the final design.

When to Use

Use the object page floorplan if:

- Users need to display, create, or edit an object.
- Users need to get an overview of an object and interact with different parts of the object.
- You need to structure your content into **different sections**.
- You have a page with one section and editable header content.

Feedback




- Users need to edit several items at the same time.
- Users need to find relevant items without knowing the exact item details.
- Users need to be guided through a series of steps when a new object is created.
- The creation process for a new object is not linear, but can have different paths, depending on the information selected.
- Users need to find one specific item, where the item or an identifying data point is known to the user (such as a code identified by a scanner).
- Users need a way to analyze data step by step from different perspectives. They need to drill down to investigate a root cause and act on transactional content within one page.
- Users need to interact with interdependent chart and table views (rather than using charts for visualization only).
- Your content can be shown in just **one section** and you don't have editable header content.

Components

The object page consists of the following elements:

- Dynamic page header (mandatory)
- Navigation bar (optional)
- Content area (mandatory)

The image below provides an overview of the object page components.

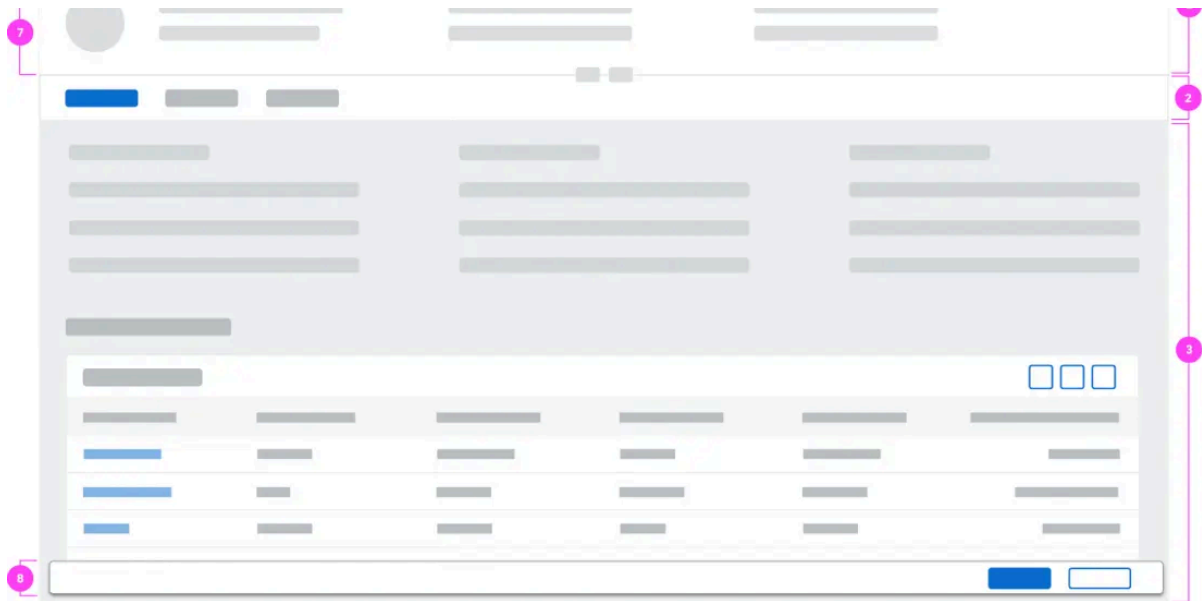

Schematic visualization of the object page

1. Dynamic page header
2. Navigation bar
3. Content area
4. Shell bar
5. Breadcrumbs
6. Global actions
7. Header content
8. Footer toolbar

The following sections explain these components in more detail.

Dynamic Page Header (mandatory)

The dynamic page header contains key information about the object and provides the user with the necessary context. The header initially expands in display mode. It also contains global actions for the object, such as *Edit* or *Delete*.

The header consists of the following elements:



Design System for Web



2. Title (mandatory)


3. Subtitle (optional)

4. Header content
(optional)


5. Object marker
(optional)

6. [Header toolbar](#) with
global actions
(optional)

7. Visual indicator for
[header features](#)
(mandatory if the
header can be
collapsed and
expanded)

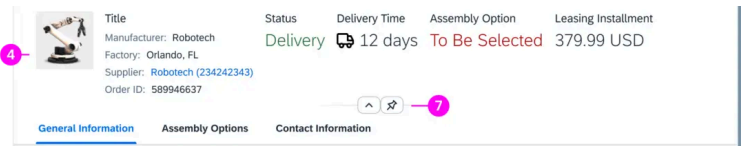

Object page with expanded dynamic page header

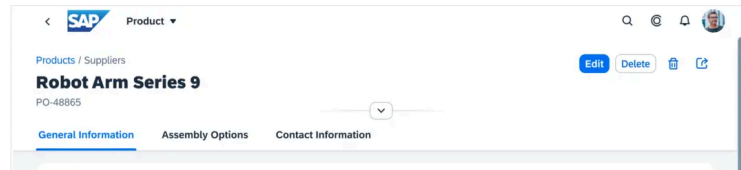

Object page with collapsed dynamic page header

If the object page is used in the [flexible column layout](#), it can also contain layout actions.

Please note:

- To display images and placeholders in the header, use the [avatar](#) control.
- The subtitle is now below the title. (In the former object page header, it was next to the title.)

For more information, see the [Dynamic Page Header](#) section for the dynamic page layout.

⚠ Warning

Always build the object page using the **dynamic page header** and not the former object page header. Using the old object page header creates issues that can't be fixed retrospectively. Using the dynamic header will also ensure consistency across all floorplans and provide greater flexibility. For details, see the [Header](#) section below.

<> Developer Hint

To use the dynamic page header in SAP Fiori elements, set the class "objectPageHeaderType" to "Dynamic".

[Feedback](#)



levels within the object page.

Header Content (optional)

The header content displays app-specific contextual information. You build the content using containers, called facets.

The facets are arranged inline, with a left float. Each facet adapts its size to the content and makes optimal use of the space without truncating the texts. If the facets do not all fit on one line, those on the right wrap to the line below.

The header content is hidden by scrolling down the page or clicking the collapse indicator.

There are several types of header facets for different kinds of data. The facets must be implemented by the app team for standalone object pages. For SAP Fiori elements, they are predefined.

The following header facets are available:

- [Form \(dataset\)](#)
- [Plain text](#)
- [Image](#)
- [Key value](#)
- [Micro chart](#)
- [Progress indicator](#)
- [Rating indicator](#)

Form Facet (Dataset)

You can use the form facet to display datasets.

A form facet consists of:

1. Title (optional)



Design System for Web

- The labels can be invisible, but need to have a text for accessibility purposes.

- The labels can be icons, but need to have a text for accessibility purposes

<> Developer Hint

For **non-SAP Fiori element object pages** only:

For each label-value pair in the form header facet, use a `sap.m.Label` and a `sap.m.Text` or `sap.m.Link`, nested within an `sap.m.HBox`.

Order Details

Manufacturer: Robotech
 Factory: Orlando, FL
 Supplier: Robotech (234242343)
 Order ID: 589946637

Contact Information

John Miller
 +1 234 5678
 john.miller@company.com

Created By: Julie Armstrong

Created On: February 20, 2020

Changed By: John Miller

Changed On: February 20, 2020

Transaction Date: March 2, 2020

Header facet - Form facets

Plain Text Facet

You can use the plain text facet to display a continuous text in the header.

A plain text facet consists of:

1. Title (optional)
2. Text

You can have links inline in the continuous text. They can navigate to another page or open a [quick view](#). The text can contain more than one link, with different actions.

The default width of the facet is 320 px. The width of the facet doesn't adapt to its content, but when the headline is broader than the facet width, the header wraps. You can also set a specific width to make optimal use of the given space.

<> Developer Hint

[Feedback](#)



Design System for Web

To set the width of the plain text facet, nest the text within an `sap.m.HBox` and set the property:width of the `sap.m.HBox`.

- durable dishwasher and microwave-safe porcelain that cleans easily and is ideal for everyday service. Comes in two bright colours.

Header facet - Plain text facet with default width

Product Description

Top-design high-quality coffee mug - ideal for a comforting moment; Pack: 6; Material: Porcelain - durable dishwasher and microwave-safe porcelain that cleans easily and is ideal for everyday service. Comes in two bright colours.

Header facet - Plain text facet with custom width

Image Facet

You can use the image facet to show a picture of the object or a user profile. The header can have either one image facet or no image facet. The position of the image facet is fixed to the left. The image can have a press event. The default press event enlarges the image. When the header collapses, the image facet moves to the left of the title and becomes smaller.

✓ Guidelines

Always use the [avatar control](#) for the image in the header. This applies to both expanded and collapsed images.



Header facet – Image facet specification

[Feedback](#)



Key Value Facet

You can use the key value facet to highlight important data or KPIs.

A key value facet contains:

1. Title (mandatory)
2. Text or number in a larger font size

If the key value facet is used with a text, such as a status, you can also display an icon to the right of the text. This icon must only be used as a visual cue for the text it relates to, and not to add more information.

<> Developer Hint

For **non-SAP Fiori element object pages** only:

Larger value texts are now possible following the introduction of new properties for the [object status](#) and [object number](#).

Status	Delivery Time	Assembly Option	Price
Delivery	12 days	To Be Selected	579 EUR


Header facet – Key value facets with KPIs and a status

Micro Chart Facet

A micro chart facet consists of:

1. Title (mandatory)
2. Subtitle (optional)
3. Micro chart (mandatory)
4. Footer text (optional)

To display the unit used in the micro chart, use the footer.

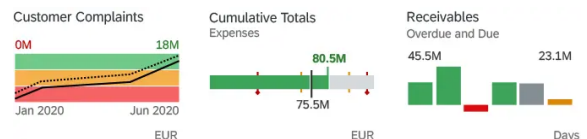

Header facet – Micro chart facets



Design System for Web



- [Bullet chart](#)
- [Column chart](#)
- [Line micro chart](#)
- [Comparison chart](#)
- [Delta chart](#)
- [Harvey ball chart](#)
- [Radial chart](#)

The micro chart facet can have a click event on the chart itself. This can lead to a page with a bigger chart or open a quick view, for example.

For more information, see [Micro Charts](#).

Progress Indicator Facet

A progress indicator facet consists of:

1. Title (mandatory)
2. Subtitle (optional)
3. Progress indicator
4. Footer text (optional)

For more information, see [Progress Indicator](#).

Profile Personal Information



Completed

Header facet - Progress indicator facet

Rating Indicator Facet

[Feedback](#)



Design System for Web

aggregated rating (such as an average rating for a product). The facet structure is slightly different in each case.



Single rating value:

The single rating consists of:

1. Title (mandatory)
2. Subtitle (optional): Displays supplementary texts
3. Rating indicator

Reliability

Based on fulfilled contracts



Rating indicator facet - Single rating

Aggregated rating:

The aggregated rating consists of:

1. Title (mandatory)
2. Subtitle (optional): Indicates the amount of data being aggregated.
3. Rating indicator
4. Footer text (mandatory): Displays the exact aggregation value. Use the format “<average rating> out of <maximum rating>”. For the average rating, use the exact value with one decimal place.

Average User Rating

6 reviews



4.1 out of 5

Rating indicator facet - Aggregated rating

✓ Guidelines

We recommend the following property settings when using the rating indicator in header facets:

- Show 5 symbols as the default.
- Use the *Favorite* icon as the symbol.

[Feedback](#)



Navigation Bar

In the object page layout, you can have several sections and structure them in one of two ways:

- [Anchor bar navigation \(default\)](#)
- [Tab navigation](#)

✓ Guidelines


Use tab navigation if your object page covers different topics that each have complex content, such as long tables or lists. With it, the content area displays one section at a time.

Anchor Bar Navigation

The anchor bar is the default navigation control for the object page. It consists of a series of anchor links, arranged horizontally beneath the header. The anchors represent sections or subsections of the page. Clicking a link makes the screen scroll to the corresponding section of the page while the anchor bar remains visible.



Design System for Web

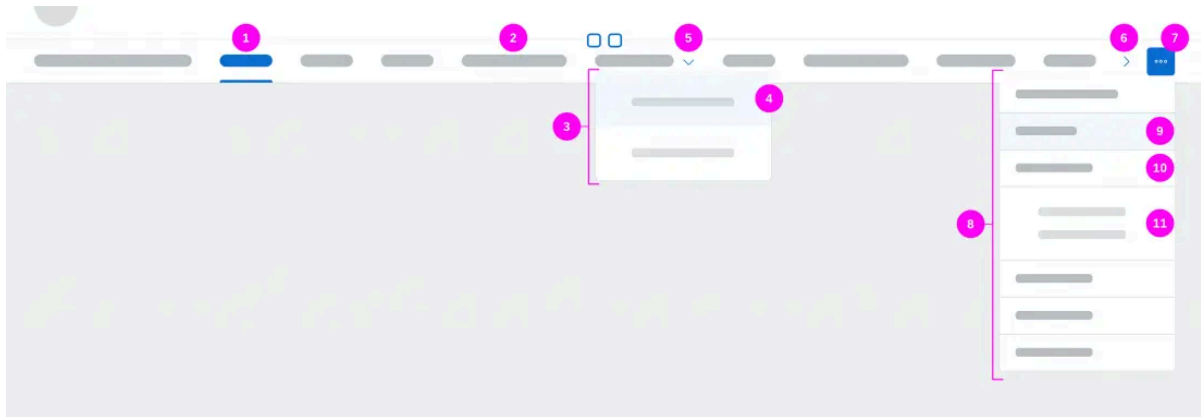

Object page – anchor bar navigation

1. Active anchor
2. Inactive anchor
3. Subsection dropdown
4. Subsection
5. Subsection dropdown indicator
6. Overflow carousel button
7. Overflow menu button
8. Overflow menu dropdown
9. Section (hover) in overflow menu
10. Section in overflow menu
11. Subsection in overflow menu

<> Developer Hint

Make sure that the `UpperCaseAnchorBar` property is disabled and that you enter the anchor bar labels in **title case** (for example: *Contact Information*).

Overflow

If there are more anchors than the screen can accommodate, the remaining anchors move into an overflow menu. The overflow button on the right of the navigation bar (⋮) opens a hierarchical dropdown list of all sections and subsections. When the user scrolls down the page, the anchor links scroll horizontally to ensure that the active anchor is always visible.

You might also see a small right arrow on the anchor bar. This arrow allows you to scroll horizontally to reveal any hidden content, and only appears when you hover over it.

[Feedback](#)



Responsiveness

On small screens, the anchor bar becomes a dropdown list. The text field of the dropdown list shows the section currently selected. Clicking the dropdown menu opens a hierarchical list with all the sections and subsections of the page.

Behavior and Interaction

Click / Select:	Action:
Anchor link	Scrolls the page to the title of the selected section
Arrow next to section anchor with several subsections	Opens the submenu.
Item in the overflow list	Scrolls the page to the title of the respective section
Keyboard left and right arrows	Move between anchor links.
Fade area to the left or right of the anchor bar	Causes an overflow arrow button to appear (complete overflow arrow button is always visible in cozy mode)
Overflow scroll button (right arrow)	Scrolls the anchors horizontally to bring anchors that overflow into view.
Overflow menu button (⋮)	Displays a hierarchical dropdown list with all the sections and subsections of the page.



Tab Navigation

Tab navigation is a variant of anchor bar navigation and handled by the object page floorplan. The tab bar works in a similar way to the [icon tab bar](#), but is not the same control.


Like anchor bar navigation, tab navigation:

- Arranges a series of tab links horizontally beneath the header, and is always visible

Feedback

Unlike the anchor bar navigation, the tab navigation:

- Displays one section in the content area at a time, so scrolling to another section is not possible
- Displays no section title in the content area. The active tab displays the section title above the section content.

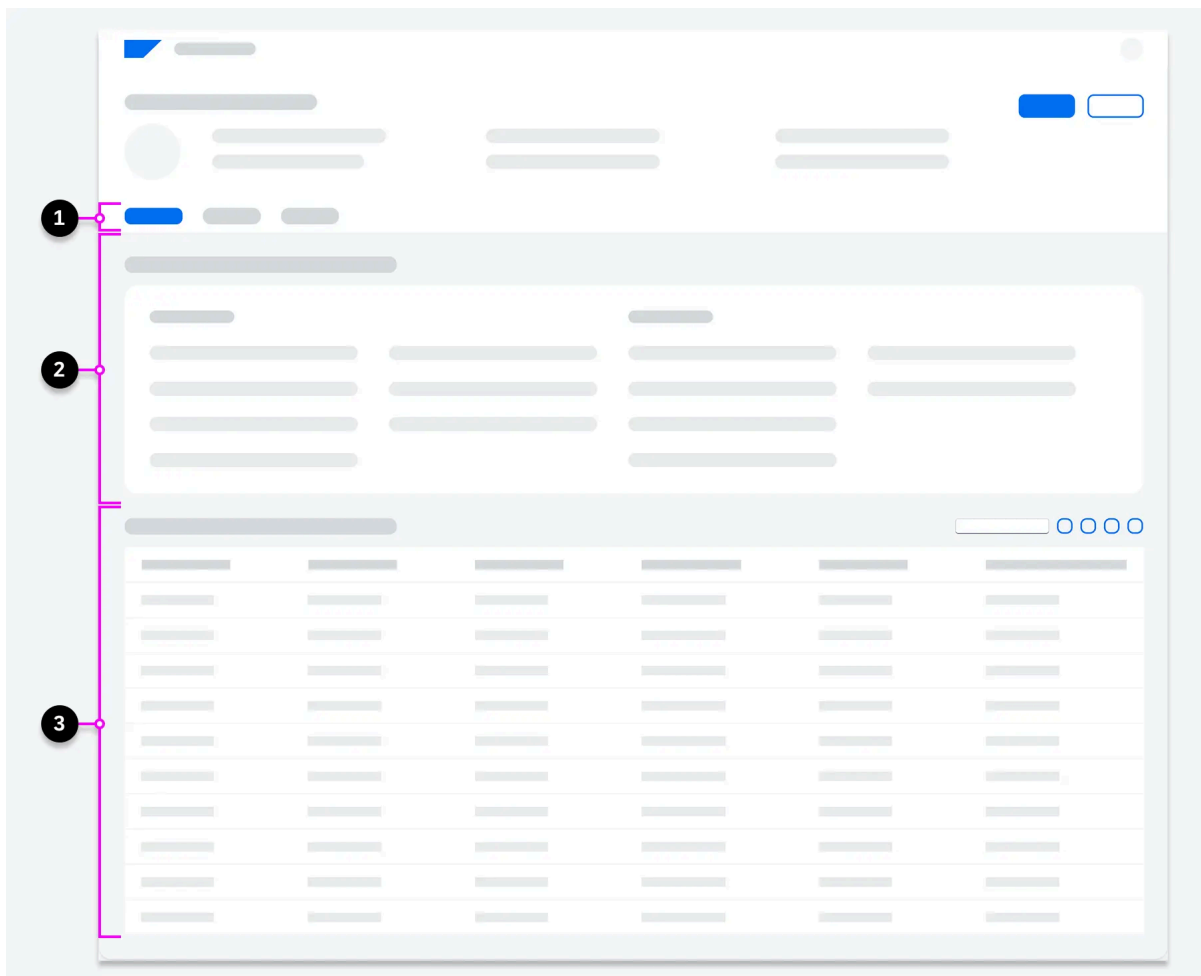

Object page – Tab navigation

1. Tab navigation
2. First subsection
3. Second subsection

If you set the tab bar property (`useIconTabBar = "true"`), the navigation bar displays tabs instead of anchors. The object page only supports text-only tabs; icon tabs and

[Feedback](#)



internal content of the tab. The tabs can have an item counter, which is displayed in parentheses next to the title of the tab.

On small screens, the tab bar uses the same horizontal carousel [overflow](#) pattern as the icon tab bar. This differs from the dropdown approach used for the anchor bar.



Subnavigation



To make it easier to reach specific content on a long tab page, tabs can have subnavigation. Subnavigation is optional, but the default state is set to “true” and a dropdown arrow is shown next to the tab. Clicking on the dropdown arrow displays a dropdown menu with the subsection anchors for that tab. Applications can decide which tabs are enabled for anchor subnavigation by setting their property to “true”.



Content Area

The object page content consists of sections and subsections arranged in a column layout.



Sections

Sections contain **only subsections**. They provide the basic structure for navigation.

A section consists of:

- A title that is displayed in the navigation bar
- Subsections

Sections cannot contain controls.

Subsections

Subsections hold **content**.

A subsection includes:

- A title with an (optional) item counter
- A toolbar with actions (optional)
- Content
- Mixable related content (optional)
- Controls inside subsection (optional)

Subsection content is arranged according to the column layout approach for the respective screen size.

Subsections have a progressive disclosure mechanism to show and hide content. App developers can specify which content is shown initially, but the user can always choose to display everything by

[Feedback](#)



Content Area Titles

For applications developed with SAP Fiori elements for OData V4, the object page automatically handles the titles according to the guidelines in the images and tables of this section.

For freestyle applications, developers may need to explicitly display or hide the titles, define their styling, and align actions to comply with the guidelines.


For Anchor Bar Navigation

✓ Guidelines

To optimize space in the content area and avoid redundant titles, for each section, display:

- One title with section-level styling
- Additional titles only to label distinct contents in the section

See the following example.

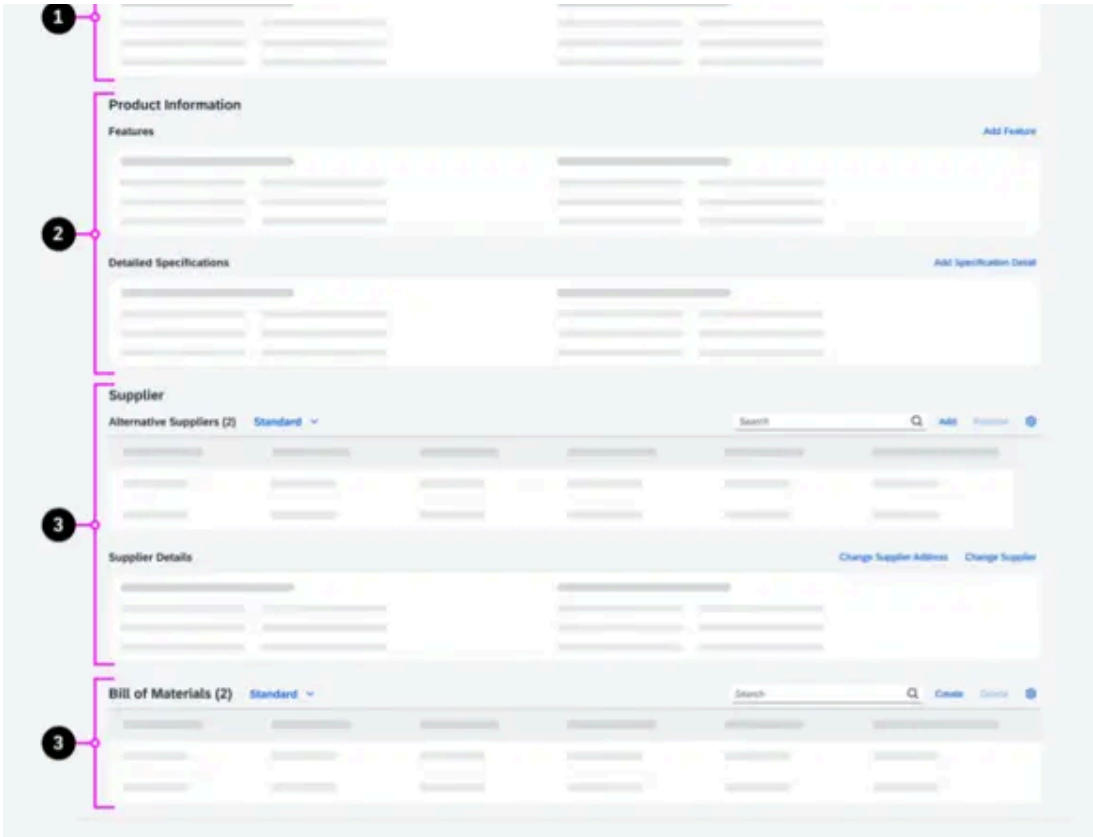

Section content	In the content area, give a title to the:	The anchor for that:
1. One subsection	Subsection only, the title is automatically displayed at the section level: <i>General Information</i> The subsection actions are aligned with the title.	Subsection, section No subsection
2. Two or more subsections	• Section: <i>Product Information</i> • Subsections: <i>Features</i> and <i>Detailed Specifications</i>	• Section • Subsection
3. Two or more subsections: • The first contains one table control. • The second contains one or more facets, images, or forms.	• Section: <i>Supplier</i> • Table: <i>Alternative Suppliers (2)</i> • Second subsection: <i>Supplier Details</i>	• Section • Subsection The first sub displayed in although it's l

Feedback



Design System for Web



	Give the same title to the first subsection and the table. Hide the subsection title and apply subsection (H5) styling to the table title. The table item counter is displayed in parentheses next to the title. The table toolbar actions are aligned with the title.	Give the same subsection and orient users.
4. One subsection that contains one table control	Table only: <i>Bill of Materials (2)</i> Give the same title to the subsection and the table. Hide the subsection title and apply subsection (H4) styling to the table title. The table item counter is displayed in parentheses next to the title. The table toolbar actions are aligned with the title.	• Subsection No subsection The subsection the menu, all the content Give the same subsection and orient users.

<> Developer Hint

Application developers need to ensure that the control title has the right styling and ARIA-level in the content area. The ARIA-level depends on the application.

Title Styles with Anchor Bar Navigation

When a section contains a single subsection with a single table **or** chart control, and:

- No other content, the control title should be H3 style
- Other content, the control title should be H4 style

When a subsection contains a form, the form title should be H5 style.


Feedback

https://www.sap.com/design-system/fiori-design-web/v1-145/page-types/floorplans/object-page

19/53

Responsiveness

The content blocks in a subsection display in a row. The width of the row depends on the column layout for the respective screen size. If there is not enough space to display a content block, it wraps to the line below.

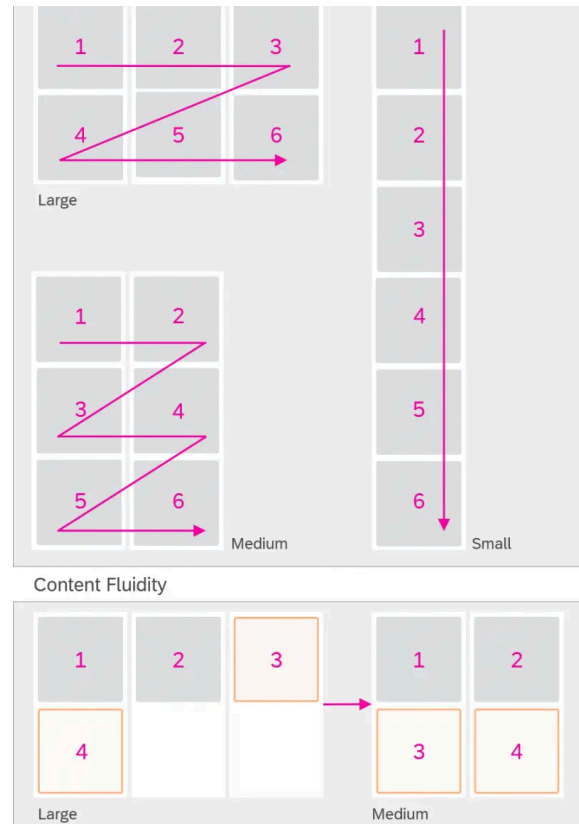

Object page – Content responsiveness

<> Developer Hint

For **non-SAP Fiori element object pages** only:

The content of the dynamic page header, navigation bar, (sub)section titles, and subsections must be vertically aligned. To achieve this, apply the `sapUxAPObjectPageSubSectionAlignContent` CSS class to the content of the subsections and set the width property to “auto”.

Forms within the Object Page

Form columns can be displayed with the standard number of columns or more to allow application teams to efficiently handle information density.

✓ Guidelines

We recommend you optimize the information density of forms on:

- Extra large screens that allow the display of 6 columns, if short titles are used

[Feedback](#)



For guidance on layout columns and content density for form content in the object page, see [Responsiveness](#).

Forms are located within subsections. They follow the column design of the object page, whereby each form group is arranged into a column. The title of the form is given by the subsection header. To improve access to the different forms we recommend always using one subsection per form, rather than placing multiple forms into one subsection.

To add actions, use the subsection header. For actions at the group level, use a group header. To prevent confusion, we recommend inserting actions only in one place, depending on the use case.

Use top-aligned labels for form fields. Top-aligned labels are known to reduce completion times and are the best approach for forms requiring localization or long labels. Using top-aligned labels also prevents issues with the spacing between the label and form field, which can occur with left- and right-aligned labels.

You can enable users to show and hide forms, groups or label-value field pairs using the *Show More / Show Less* toggle button.

SAP Fiori elements provide an option to show or hide fields on small screen devices based on their importance.

<> Developer Hint

You can set the importance of a field using the UI.Importance annotation type ("High", "Medium", or "Low"), the fields are shown or hidden depending on the screen size. If you do not specify the UI.Importance annotation, the default is set to "High" and the field is shown on all device types.

Blocks

Layout blocks allow content to be aligned within the columns as follows:

- Layout 1: Occupies the maximum available horizontal space of one column.



[Feedback](#)



column available, it occupies one column.

- Layout 3: Occupies the horizontal space of three columns. If there is only one column available, it occupies one column. If there are only two columns available, it occupies two columns.

To show and hide blocks, you can use a *Show More / Show Less* toggle button. Do not use the [panel](#) container in the object page content area.

Tables

When a section or subsection contains one table and no other content, remove the redundant table title so the section or subsection title serves as the table title. In the subsection, also reduce the vertical space.

Grid tables in sections must have at least 4 rows, and the maximum number of rows visible will depend on the window size. To prevent any need for the user to scroll to access the horizontal scrollbar, keep the table within the screen size limitations. This may not be possible in all use cases, for example, if the table contains a large data volume, then you must use two scrollbars.

In an object page with anchor bars, use no more than 4 grid tables to prevent cognitive overload. (Consider using different sections between multiple tables to ease the burden, except for table comparison use cases.) To include more than 4 grid tables, place them in individual tabs.

To embed analytical tables or tree tables in an object page, use an object page with tabs and place each table in its own tab. If you are using a scrollable object page without tabs, use responsive or grid tables instead, and offer navigation to another page with the respective table type.

Depending on the number of table items, use one of the following loading behaviors:

Number of Table Items:	Use:
Up to 20	Items can be displayed

Feedback



Design System for Web



Up to 100

More than 50-100 but less than 200

More than 200 or tab approach is unsuitable

Lazy loading

Tab navigation

Navigation to another p

If a table is expected to have more than 20 items, use one of the 3 options below for long tables.

For all three options, we recommend **providing a search**, and if feasible, **sorting and filtering for the table** in the object page. **Avoid grouping.**

1. Lazy Loading Behavior (“More” button)

If you expect up to 100 items, use the [More button](#) of the responsive table. The initial number of items shown depends on the height of the rows. We recommend initially showing 10 items, but not more than 20. If there is more than one table in the object page, only use this option for tables with up to 50 expected items.

2. Tab Navigation

If you expect to have more than 50 to 100 items, but fewer than 200, using the object page with tab navigation instead of anchor navigation also solves the problems associated with long tables. To enable the scroll-to-load behavior, the table must be the only or last element within a tab.

3. Navigation to Another Page

For tables with more than 200 items, or when the tab approach is unsuitable, restrict the size of the table in the object page to a reasonable number of items. We recommend showing a preview of only 10 items, but not more than 20. This can be achieved using predefined filters and/or by sorting the table. If necessary, you can also set a fixed number of items (such as the top 10). To enable the user to work with the entire table, offer navigation to a separate page, such as a list report, subobject page, or dynamic page with the

Assembly Options (423)

Products	Search	Create	Delete	Filter	Sort	Group	Export	Print	Refresh	Reset	Help
Document Number	Company	Contact Person	Posting Date	Amount (Local Currency)							
10223882001820	Jolaga	Denise Smith	01/10/2023	12,897.00 EUR							
10223882002198	Exotic Liquids	Paul Blevins	01/10/2023	12,897.00 EUR							
21718318237189	Lyngbyild	Candice Brown	01/11/2023	12,897.00 EUR							
23797812379652	DelBont Industries	Richard Wilson	01/11/2023	12,897.00 EUR							
24372738237827	Jolaga	Denise Smith	01/12/2023	12,897.00 EUR							
25717388235263	Exotic Liquids	Paul Blevins	01/13/2023	12,897.00 EUR							
25738726535211	DelBont Industries	Richard Wilson	01/13/2023	12,897.00 EUR							
28363668229821	Jolaga	Denise Smith	01/16/2023	12,897.00 EUR							
30818377389129	DelBont Industries	Richard Wilson	01/16/2023	12,897.00 EUR							
33030205939291	Exotic Liquids	Paul Blevins	01/16/2023	12,897.00 EUR							

Show All (423)

Table with navigation to a separate list report

Feedback

https://www.sap.com/design-system/fiori-design-web/v1-145/page-types/floorplans/object-page

23/53



label *Show All (x)*, where *x* represents the total number of items in the table.



Representation of Child Pages

In object pages with drilldown navigation, child pages are represented in two ways:

- Breadcrumbs: A breadcrumb is displayed above the object title. Limit the breadcrumb to the drilldown levels within the object page.
- Paging buttons: Up and down arrows in the [layout action area](#) allow the user to navigate between subitems without going back to the original list.

Footer Toolbar

The footer toolbar is used for closing and finalizing actions in:

- Edit and create mode, for example, *Save*, *Post*, *Accept*, *Reject*, and *Activate*
- Display mode, for example, *Approve*, *Accept*, and *Reject*

Behavior and Interaction

The basic layout of the object page in terms of header, navigation, and content remains the same in all modes (display, edit, create).

Initial Focus

When the object page is loaded, set the initial focus as follows:

- If the object page is in edit mode, set the focus on the first empty mandatory field.
- If there are no mandatory fields, set the focus on the first editable element or first action.

Edit

[Feedback](#)



Use the same content layout for both display and edit mode – content should not change location when the user switches between display and edit modes.

For global and local editing guidelines, see [Object Handling \(Create, Edit, Delete\)](#).

There are two ways of editing header content depending on whether you're implementing Global Edit or Partial Edit, both of which are explained below.

Editing header content in Global Edit mode

Because the header snaps on scroll, there are no editable forms in the header itself, so if you're dealing with editable header content, a temporary "Header" section is generated above all the other sections of the page where the header content can be edited. The same principle applies if your object page only has one section and there is editable content in the header, except a temporary navigation bar should be generated as well. Any changes made to the header are not reflected until the user saves them.

When there is editable content in the header, the title bar information and all editable fields from the header container move from the header to the temporary "Header" section and non-editable content displays as read-only. You can leave out header content that doesn't make sense in edit mode (for example, aggregated values that are calculated from several sources, KPIs, or micro charts). If only a few fields in the header are editable, and they match an existing section, they are moved to that section. In this case, no editable header section appears. The header container in edit mode can also contain independent facets that are not included in the header content in display mode which provide information to assist editing.

✓ Guidelines

The temporary "Header" section for editing header content requires manual implementation for freestyle applications. Consider whether it's better to place editable content in the object page sections instead of in the header.

<> Developer Hint

The temporary "Header" section described comes out of the box with SAP Fiori elements. With freestyle applications, it needs to be implemented manually.

Editing header content in Partial Edit mode

[Feedback](#)



If there are too many elements to fit in a dialog, the partial edit triggers a subpage. The subpage contains all editable information from the header. However, it differs from the “Header” section in global edit mode in that it has no action buttons in the toolbar, no navigation, and no breadcrumbs.

Create and edit subobjects

The following options are available for creating or editing subobjects:

- Navigation to a subobject page
- Inline create or inline edit in a [table](#)
- Dialog containing the fields of the object

To enable users to create subobjects inline, offer an *Add* or *Create* button on the table toolbar. Clicking the button creates a row at the top of the table. Pressing **Ctrl+Enter** has the same effect.

If the subobject has less than 8 fields, use a dialog or the inline create/edit option (no separate page for the subobject). Exceptions can apply if additional content for the subobject is available but not part of the edit process, or if other apps need to offer deep links to the subobject page.

Edit Actions in Display Mode (freestyle apps only)

The standard flow is to switch to edit mode for edit and delete actions. However, in some cases, it can be helpful to offer certain edit actions in display mode as well.

You can offer edit actions in display mode if:

- Switching to edit mode would inconvenience the user. This is especially true if the change is small and quick, and switching to edit mode would take longer than making the change.
- The change does not impact a critical flow or result in technical inconsistencies.

Examples: Adding a comment, uploading a file

Do not offer edit actions in display mode if:

- The change has a critical impact on business data/follow-on processes.
- The change requires a finalizing action.

[Feedback](#)

When offering delete actions in display mode, always show a delete confirmation dialog. For more information, see:

- [Delete Objects – Object Page](#)
- [Delete Objects – Top Tips](#)

Unsaved Changes

If [draft handling](#) has been implemented, documents are automatically saved as draft versions in the background. An editing icon to the right of the object title indicates that a draft version exists. In other words, either the current user or another user has made changes, but not yet actively saved the document (“unsaved changes”). Do not show the editing icon for unsaved changes if draft handling is not supported.

Selecting the editing icon invokes a popover with more information about the unsaved changes. This normally states:

- Who made the changes
- When the last changes were made

The popover closes when the user clicks outside the popover or clicks the  (*Close*) icon.



Unsaved changes popover

Create

Create mode is similar to edit mode, except that the user creates a new object and defines a title for it. Until the new object title is known, display the placeholder text “New ” (for example, *New Purchase Order*). Replace the placeholder text with the actual name or ID of the new object as soon as this has been entered or generated.

Consider using the [wizard floorplan](#) instead of the object page floorplan if:

- You need to guide the user through a series of steps when a new object is created.
- You need a progressive disclosure approach for the creation process.


[Feedback](#)



- The user is not familiar with the creation task.

Loading Behavior

The object page loads in a “growing” mode. This means that the object page loads section by section to show users some content before the whole page is loaded. Scrolling down the page triggers loading for the sections below. Hidden items in sections are only loaded (and rendered) by clicking the *Show More* button for the section.

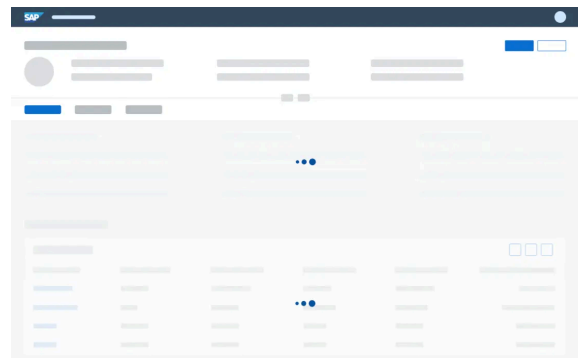

Busy indicators for sections still loading

If loading takes a long time, a busy indicator is shown on top of the section or item until the content is loaded and visible.


SAP Fiori elements uses a skeleton template with generic placeholders. For more information, see [Placeholder Loading](#).

Message Handling

In Display Mode

The following controls can provide messages to users in the object page in display mode:

1. Generic tag
2. Message strip
3. Object status

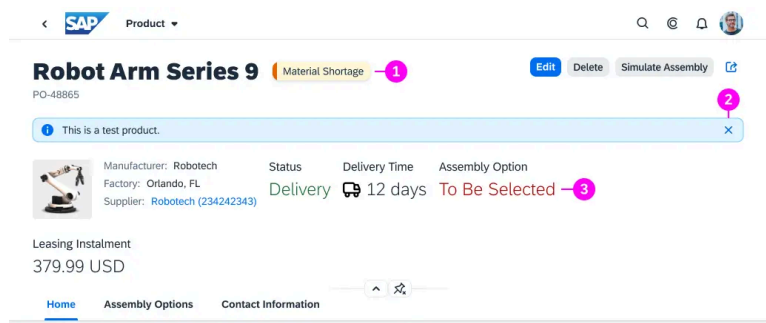

Object page with different messaging options

Feedback



KPIs and [situations](#).

Message Strip

You can place a [message strip](#) in the header or in a section in the content area:

- **Header**

Show the message strip in the header if the information relates to the whole object.

Place the message strip between the object page title and the header content. When the header is collapsed, it remains visible.

- **Content area section**


Show the message strip in the content area section if the information relates to a specific section.

Place the message strip at the top of the section above the section title.


Use a single message strip with a single message per area. Do not stack several message strips together.

A message strip can display:

- A call to action, such as a task that the user must perform

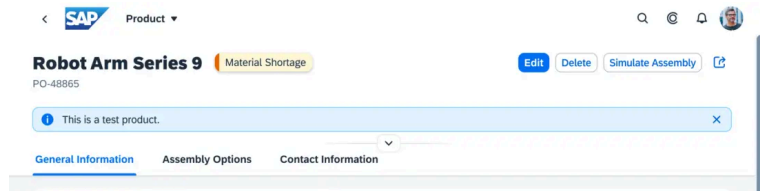

Object page with message strip and collapsed header

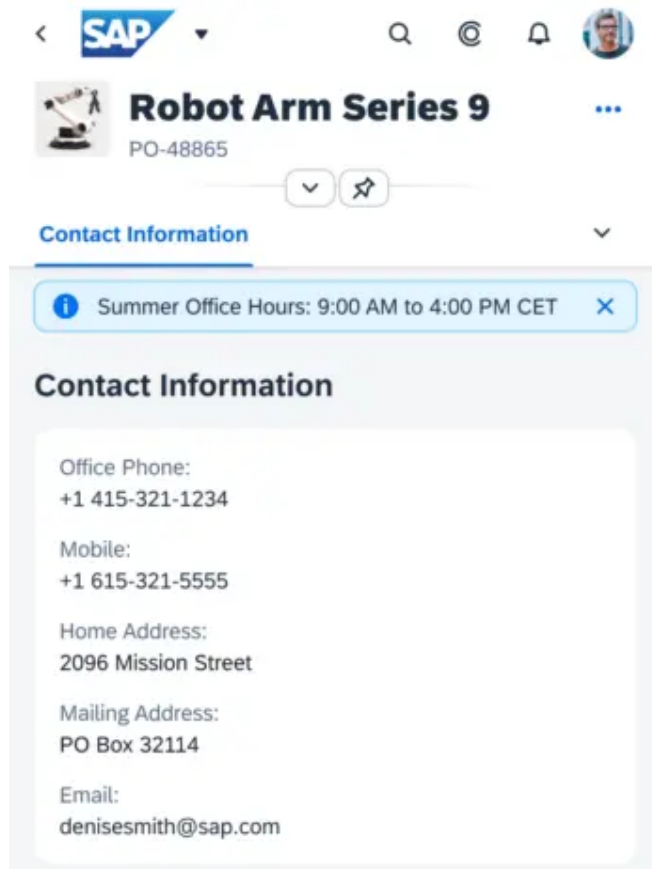

Object page with message strip in a section



KNOW

- An issue that is not related to a form field
- The object status if the object status control is too small to convey the information.
- For a brief status text, use the [object status](#) control.

If you decide to display both the message strip and the object status control, they should not repeat the same information.

- Brief guidance on how to use or read the page.

If the object page requires multiple hints for the user, consider using [SAP Companion](#) instead.

Object Status

The [object status](#) displays a brief description of the object status.

In Edit Mode

In edit mode, use the [message popover](#) to help validate forms and tables as a single object.

Responsiveness

[Feedback](#)



For standard columns provided by the form, see the [Form / Simple Form](#).

SAP Fiori Elements: Extended Columns Feature

SAP Fiori elements, by default, provide reduced content density for form content:

- Small: 1 column
- Medium: 3 columns
- Large: 4 columns
- Extra large: 6 columns

Use

- For general content or for forms that contain longer text/label value pairs, use the **standard column distribution** provided in [Form / Simple Form](#).
- For forms that contain short text/label value pairs in SAP Fiori elements, use the **extended column feature** to improve information density.

Extra Large Screens

Responsiveness of Form Content

For size XL, we recommend using the full 6 columns for forms with a lot of content. This gives you greater flexibility when you organize the form content and the groups

✓ Guidelines

- **Use the default balanced option** to spread the content of the form group or groups evenly across a maximum of 4 columns.
- **Use the extended column option** to spread the content of your form and group or groups evenly across 6 columns.

XL screen extended (up to 6 columns)



Large Screens


Content Density of Forms with Large Screens

Forms on an L screen have 3 columns by default. You can increase the number to as many as 4.

✓ Guidelines

- **Use the default balanced option** to spread the content of your form group or groups evenly across a maximum of 3 columns.
- **Use the extended option** to spread the content of your forms and group or groups evenly across 4 columns.

Large Screen Extended (4 columns)

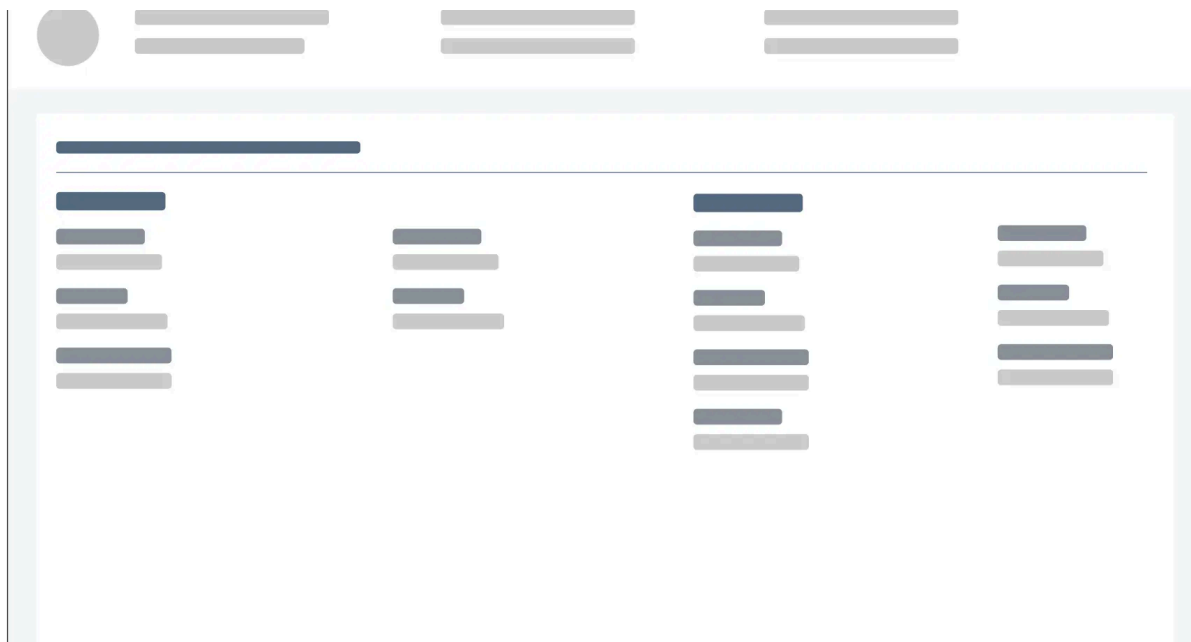

Medium Screens


Content Density of Forms with Medium Screens

Forms on an M screen have 2 columns by default. You can increase the number to 3.

✓ Guidelines

- **Use the default balanced option:** to spread the content of your form group or groups equally across 2 columns.
- **Use the extended option:** to spread the content of your forms and group or groups equally across 3 columns.

[Feedback](#)

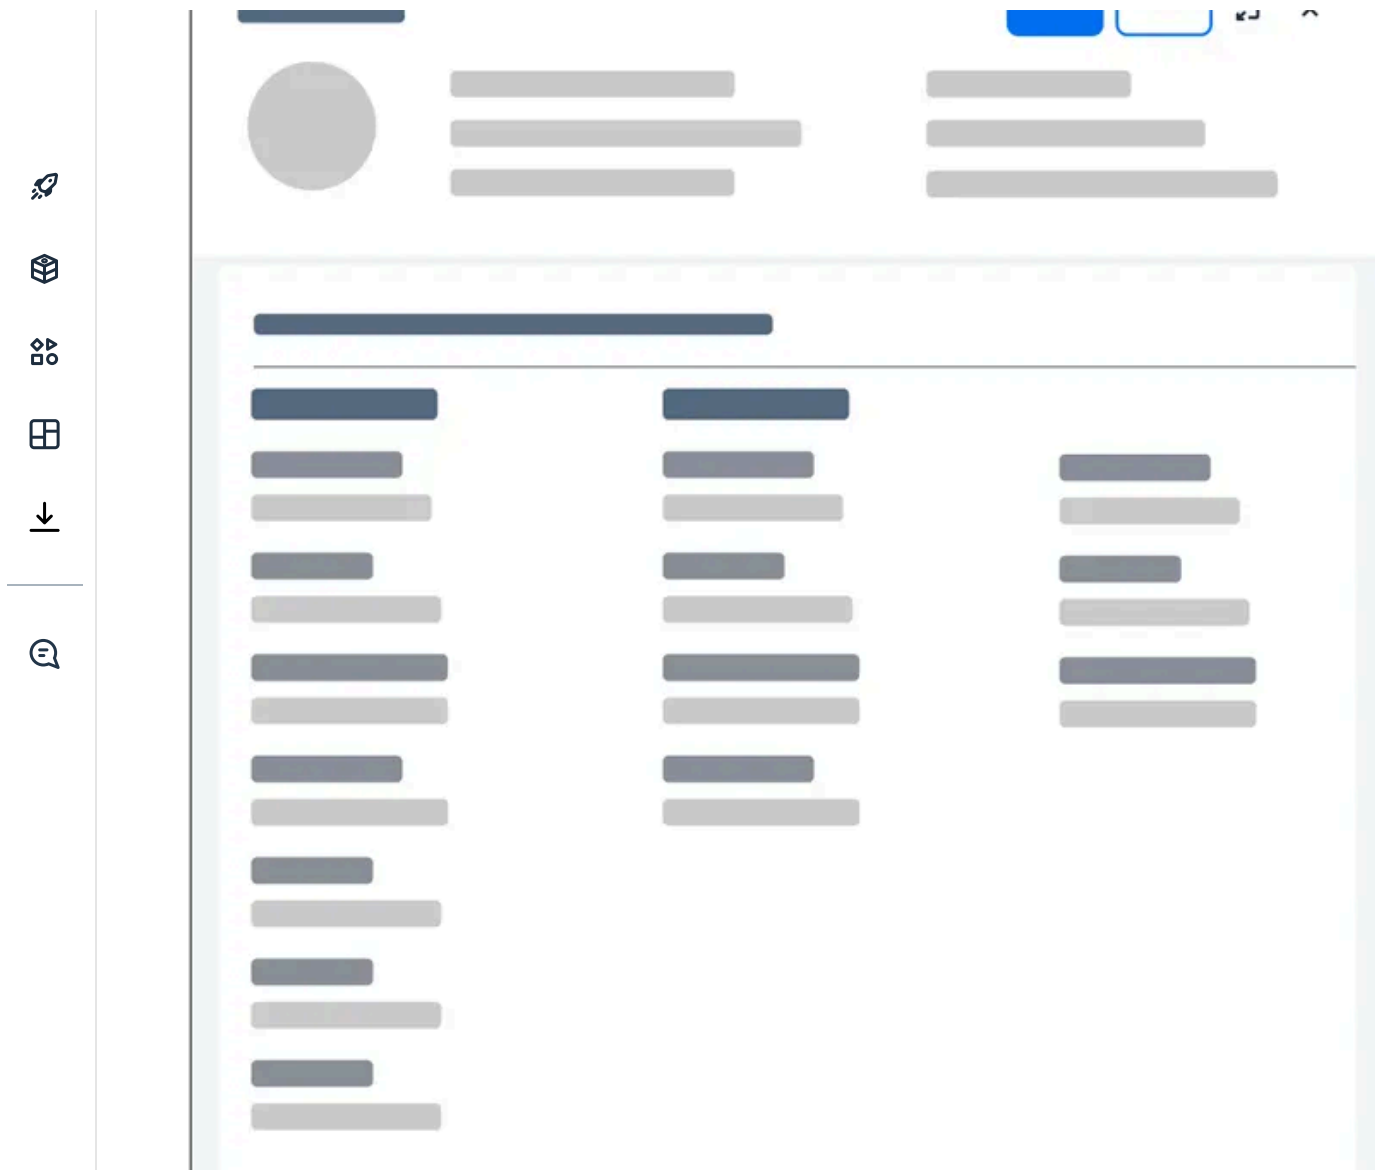


Medium screen extended (3 columns)

Small Screens

Forms on an S screen (smartphone or small desktop screens) have one column by default.

Small screen with form content (1 column default)

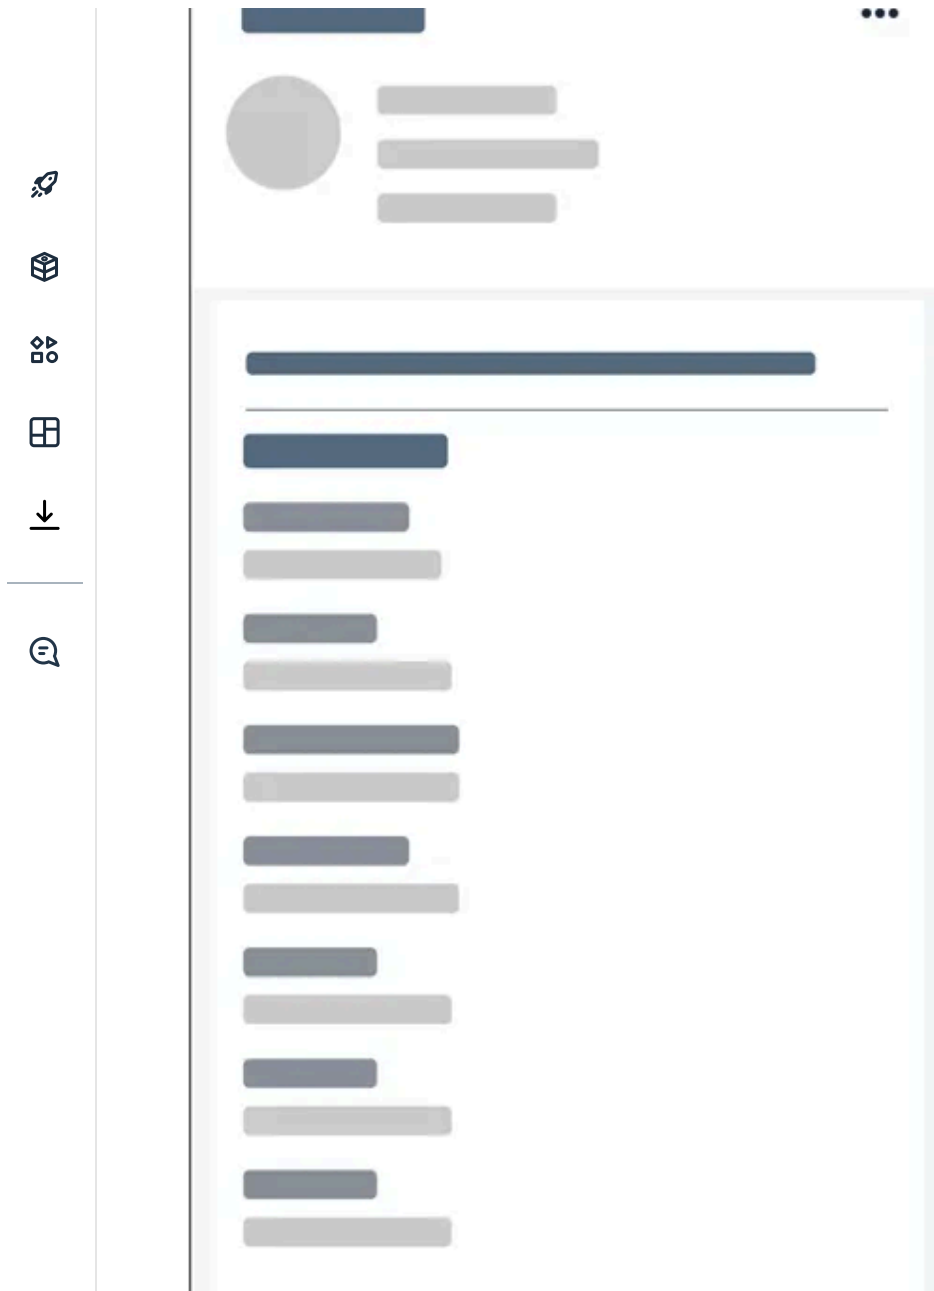

Guidelines

Dynamic Page Header

Use the header to set the context. Ensure that it is clearly structured and contains only essential information. Too much information impedes the main purpose of providing clear context.

[Feedback](#)



- The header container is always optional. If there is no important data to be displayed, you can omit it. In this case, only the header title bar is shown.
- Omit the image if it is not necessary. It is generally the tallest element in a header container.
- Use a light theme to reduce the emphasis on the header if it doesn't contain much information.
- Consider moving information from the header into a general information section.

Actions

Arrange the actions in the header toolbar with care, and consider what matters most to the user:

- Highlight actions that are common or most important.
- Differentiate between secondary and generic actions.
- Use either a text button or an icon for an action, but not both.
- Use icons only for generic actions (such as  *Share*). For all business actions, use text buttons.
- Place the most important actions on the left (actions go into the overflow from right to left).
- Establish a coherent visual approach.

For more information, see [Action Placement](#).

Image Facet

If you intend to use images in the object header, consider the following:

- How will the user manage the images?
- How will the system block people without permission from editing images?
- How will these images be reflected in other floorplans if they are part of the object?
- If there are a large number of items, how would a user be able to manage images without having to navigate from page to page?
- Will the organization be able to manage the images?

Tab Navigation

[Feedback](#)



specific user preference.

Content Area

- Avoid using the object page as a universal container for masses of information. Use the object page in accordance with the SAP Fiori principles: role-based, coherent, simple, and adaptive.
- Give your users quick and easy access to the information they need to complete their task(s). Use a progressive disclosure strategy to keep your interface clean. You can always provide additional information on request.
- Only present your users with information that makes sense for their industry, role, activity, and task.

Dynamic Side Content

You can offer [dynamic side content](#) alongside the object page under the following conditions:

- Use the side panel only for contextual content. Do not place finalizing or global actions in the side panel. This is because opening the side panel occupies the whole right side of the screen. There is no way to show it only below the header and anchor bar.
- Do not place object information in the side panel. This information should always be in the content area of the object page.

Standard Naming Conventions

For all objects, follow the standard conventions for action buttons, the object name, and the title in the shell bar. For more information, see:

- [Object Handling – Naming Guidelines](#)
- [Launchpad Shell Bar – Page Title and Navigation Menu](#).

Resources

[Feedback](#)



Controls

- [Dynamic Page – Header](#) (guidelines)
- [Action Placement](#) (guidelines)
- [Form / Simple Form](#) (guidelines)
- [SAP Fiori Elements – Object Page Header](#) (guidelines)
- [SAP Fiori Elements – Object Page Content Area](#) (guidelines)
- [SAP Fiori Elements – Object Page Footer Bar](#) (guidelines)
- [Object Page Floorplan](#) (SAPUI5 samples)
- [List Report and Object Page](#) (developer guide)
- [Object Page](#) (SAP Fiori development portal)

Tab Navigation

As an alternative to the anchor bar, you can also use the tab bar for navigation. The tab bar works in a similar way to the [icon tab bar](#), but is not the same control. Tab navigation for the object page is a variant of anchor bar navigation, and is handled by the object page floorplan.


Like the anchor bar, the tab bar:

- Consists of a series of tab links arranged horizontally beneath the header and always remains visible
- Represents page sections with the tabs and displays a menu of subsections, when they exist

Unlike the anchor bar, the tab bar displays:

- One section in the content area at a time when the tab link is clicked, so scrolling to another section is not possible

[Feedback](#)

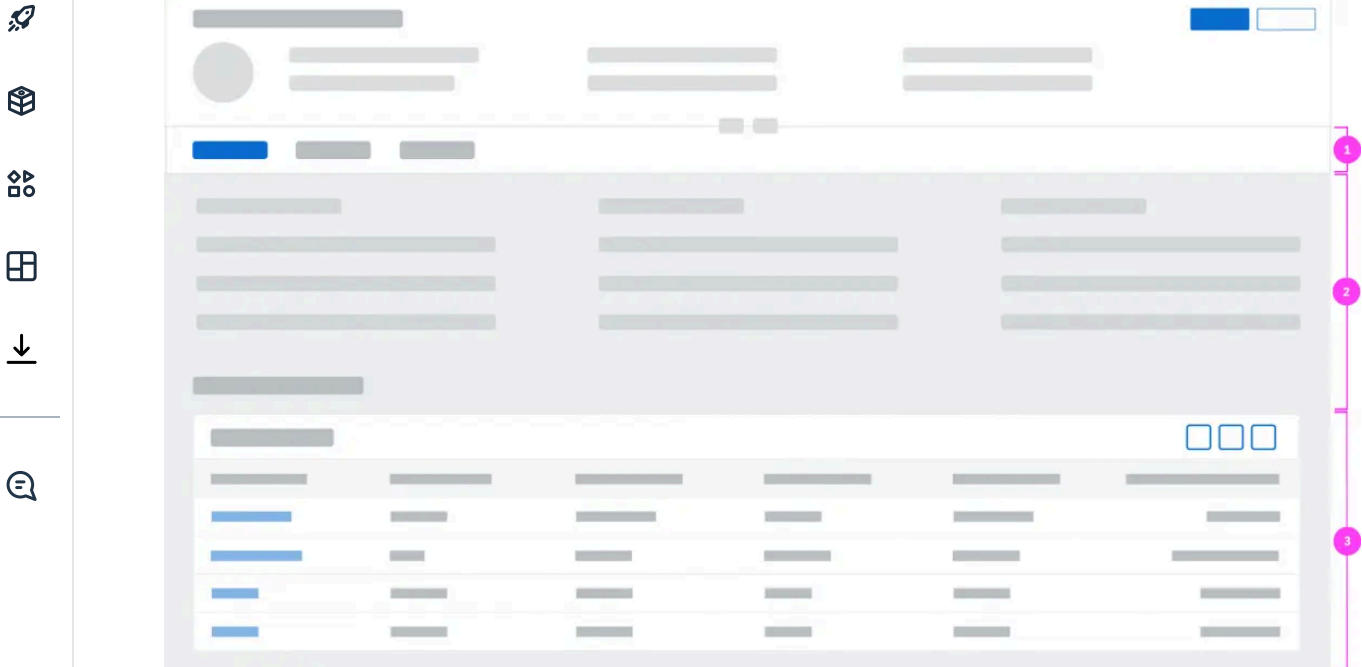

Object page – Tab navigation

1. Anchor bar/tab navigation
2. First section
3. Second section

If you set the tab bar property (`uselconTabBar = "true"`), the navigation bar displays tabs instead of anchors. The object page only supports text-only tabs; icon tabs and icon/text tabs are not available. The object page sections and subsections are reflected in the tab navigation: sections of the object page become the tabs, and subsections become the internal content of the tab. The tabs can have an item counter, which is displayed in parentheses next to the title of the tab.

On small screens, the tab bar uses the same horizontal carousel overflow pattern as the icon tab bar. This differs from the dropdown approach used for the anchor bar.

If the content of a section contains a control, for example a table, then we recommend to always display it, even if the control title and tab title are identical. This makes it easier for the user to orientate themselves.

Subnavigation

[Feedback](#)



dropdown arrow is shown next to the tab. Clicking on the dropdown arrow displays a dropdown menu with the subsection anchors for that tab. Applications can decide which tabs are enabled for anchor subnavigation by setting their property to “true”.



Content Area

The object page content consists of sections and subsections arranged in a column layout.

Sections

Sections are containers for subsections. They provide the basic structure for navigation and are directly reflected in the navigation bar.

The first section doesn't have a title.

All the following sections consist of:

1. Title with item counter (counter is optional)
2. Subsections

Sections cannot contain controls.

If a section contains only one subsection, the title of the subsection is used as the name of the section. In this case, there is no subsection submenu in the anchor bar.

Sections can only contain subsections, not content. Because of this, the object page only provides toolbars for local actions at the subsection level.

Subsections

Subsections are containers for actual content.

A subsection consists of:

1. Title with item counter (counter is optional)
2. Toolbar with actions (optional)
3. Content
4. Mixable related content (optional)
5. Controls inside subsection (optional)

If the subsection contains a table or a chart and the title is the same, you have the option to hide the subsection title.

Subsection content is arranged according to the column layout approach for the respective screen size.

Subsections have a progressive disclosure mechanism to show and hide content. App developers can specify which content is shown initially, but the user can always choose to display everything by selecting the toggle button *Show More / Show Less* at the bottom right of the subsection.




Design System for Web

the section title, then the section title can be hidden so that this title is only displayed once. This avoids unnecessary redundancies.

We recommend the same for subsection titles.

Responsiveness

The content blocks in a subsection display in a row. The width of the row depends on the column layout for the respective screen size. If there is not enough space to display a content block, it wraps to the line below.

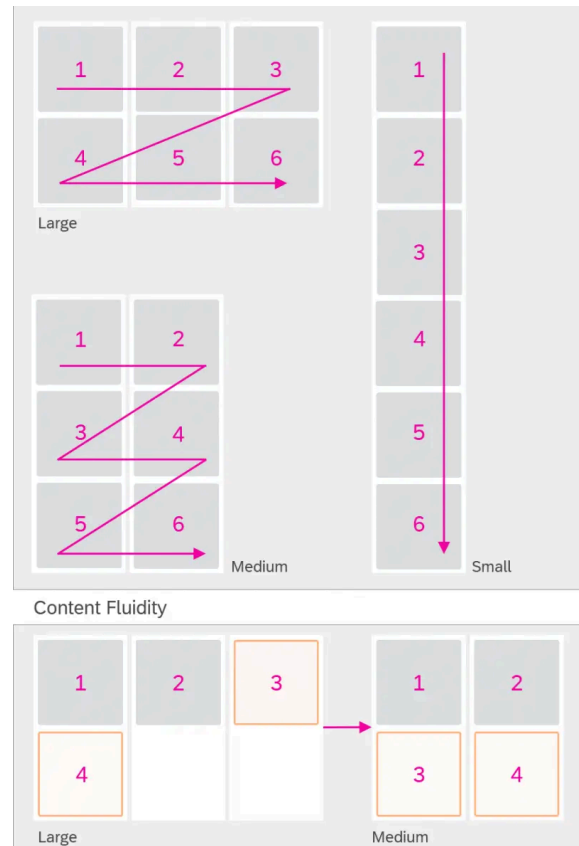

Object page – Content responsiveness

<> Developer Hint

For **non-SAP Fiori element object pages** only:

The content of the dynamic page header, navigation bar, (sub)section titles, and subsections must be vertically aligned. To achieve this, apply the `sapUxAPObjectPageSubSectionAlignContent` CSS class to the content of the subsections and set the width property to “auto”.

Forms within the Object Page

[Feedback](#)



✓ Guidelines

We recommend you optimize the information density of forms on:

- Extra large screens that allow the display of 6 columns, if short titles are used.
- Large and medium screen that allow the display of more columns between the breakpoints for the screens.

For guidance on layout columns and content density for form content in the object page, see [Responsiveness](#).

Forms are located within subsections. They follow the column design of the object page, whereby each form group is arranged into a column. The title of the form is given by the subsection header. To improve access to the different forms we recommend always using one subsection per form, rather than placing multiple forms into one subsection.

To add actions, use the subsection header. For actions at the group level, use a group header. To prevent confusion, we recommend inserting actions only in one place, depending on the use case.

Use top-aligned labels for form fields. Top-aligned labels are known to reduce completion times and are the best approach for forms requiring localization or long labels. Using top-aligned labels also prevents issues with the spacing between the label and form field, which can occur with left- and right-aligned labels.

You can enable users to show and hide forms, groups or label-value field pairs using the *Show More / Show Less* toggle button.

SAP Fiori elements provide an option to show or hide fields on small screen devices based on their importance.


<> Developer Hint

You can set the importance of a field using the UI.Importance annotation type ("High", "Medium", or "Low"), the fields are shown or hidden depending on the screen size. If you do not specify the UI.Importance annotation, the default is set to "High" and the field is shown on all device types.



Layout blocks allow content to be aligned within the columns as follows:

- Layout 1: Occupies the maximum available horizontal space of one column.
- Layout 2: Occupies the horizontal space of only two columns. If there is only one column available, it occupies one column.
- Layout 3: Occupies the horizontal space of three columns. If there is only one column available, it occupies one column. If there are only two columns available, it occupies two columns.

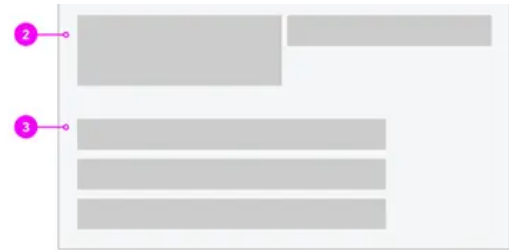

Object page – Block base

To show and hide blocks, you can use a *Show More / Show Less* toggle button. Do not use the [panel](#) container in the object page content area.

Tables

When a section or subsection contains one table and no other content, remove the redundant table title so the section or subsection title serves as the table title. In the subsection, also reduce the vertical space.

Grid tables in sections must have at least 4 rows, and the maximum number of rows visible will depend on the window size. To prevent any need for the user to scroll to access the horizontal scrollbar, keep the table within the screen size limitations. This may not be possible in all use cases, for example, if the table contains a large data volume, then you must use two scrollbars.

In an object page with anchor bars, use no more than 4 grid tables to prevent cognitive overload. (Consider using different sections between multiple tables to ease the burden, except for table comparison use cases.) To include more than 4 grid tables, place them in individual tabs.

To embed analytical tables or tree tables in an object page, use an object page with tabs and place each table in its own tab. If you are using a scrollable object page with

[Feedback](#)



Depending on the number of table items, use one of the following loading behaviors:

Number of Table Items:	Use:
Up to 20	Items can be displayed
Up to 100	Lazy loading
More than 50-100 but less than 200	Tab navigation
More than 200 or tab approach is unsuitable	Navigation to another p

If a table is expected to have more than 20 items, use one of the 3 options below for long tables.

For all three options, we recommend **providing a search**, and if feasible, **sorting and filtering for the table** in the object page. **Avoid grouping**.

1. Lazy Loading Behavior (“More” button)

If you expect up to 100 items, use the [More button](#) of the responsive table. The initial number of items shown depends on the height of the rows. We recommend initially showing 10 items, but not more than 20. If there is more than one table in the object page, only use this option for tables with up to 50 expected items.

2. Tab Navigation

If you expect to have more than 50 to 100 items, but fewer than 200, using the object page with tab navigation instead of anchor navigation also solves the problems associated with long tables. To enable the scroll-to-load behavior, the table must be the only or last element within a tab.

3. Navigation to Another Page

For tables with more than 200 items, or when the tab approach is unsuitable, restrict the size of the table in the object page to a reasonable number of items. We recommend showing a preview of only 10 items, but not more than 20. This can be achieved using predefined filters and/or

Assembly Options (423)

Products					
Document Number	Company	Contact Person	Posting Date	Amount (Local Currency)	
10223882001820	Jolaga	Denise Smith	01/10/2023	12,897.00 EUR	
10223882002198	Exotic Liquids	Paul Bleivins	01/10/2023	12,897.00 EUR	
21718318237193	Lyngbyild	Candice Brown	01/11/2023	12,897.00 EUR	
23797812373652	DelBont Industries	Richard Wilson	01/11/2023	12,897.00 EUR	
24372738237827	Jolaga	Denise Smith	01/12/2023	12,897.00 EUR	
25717388235263	Exotic Liquids	Paul Bleivins	01/13/2023	12,897.00 EUR	
25738726535211	DelBont Industries	Richard Wilson	01/13/2023	12,897.00 EUR	
28363665229821	Jolaga	Denise Smith	01/16/2023	12,897.00 EUR	
30818377389129	DelBont Industries	Richard Wilson	01/16/2023	12,897.00 EUR	
33030203939291	Exotic Liquids	Paul Bleivins	01/16/2023	12,897.00 EUR	

Show All (423)

Feedback



the top 10). To enable the user to work with the entire table, offer navigation to a separate page, such as a list report, subobject page, or dynamic page with the respective table type. To do this, place a right-aligned link below the table with the label *Show All (x)*, where x represents the total number of items in the table.

Representation of Child Pages

In object pages with drilldown navigation, child pages are represented in two ways:

- Breadcrumbs: A breadcrumb is displayed above the object title. Limit the breadcrumb to the drilldown levels within the object page.
- Paging buttons: Up and down arrows in the [layout action area](#) allow the user to navigate between subitems without going back to the original list.

Footer Toolbar

The footer toolbar is used for closing and finalizing actions in:

- Edit and create mode, for example, *Save*, *Post*, *Accept*, *Reject*, and *Activate*
- Display mode, for example, *Approve*, *Accept*, and *Reject*

Tab Navigation

As an alternative to the anchor bar, you can also use the tab bar for navigation. The tab bar works in a similar way to the [icon tab bar](#), but is not the same control. Tab navigation for the object page is a variant of anchor bar navigation, and is handled by the object page floorplan.


Like anchor bar navigation, tab navigation:

- Displays a series of tab links arranged horizontally beneath the header and always remains visible

[Feedback](#)

Unlike the anchor bar:

- Clicking a tab link displays one section in the content area at a time, so scrolling to another section is not possible
- No section title is displayed in the content area. Instead, the active tab displays the section title above the section content

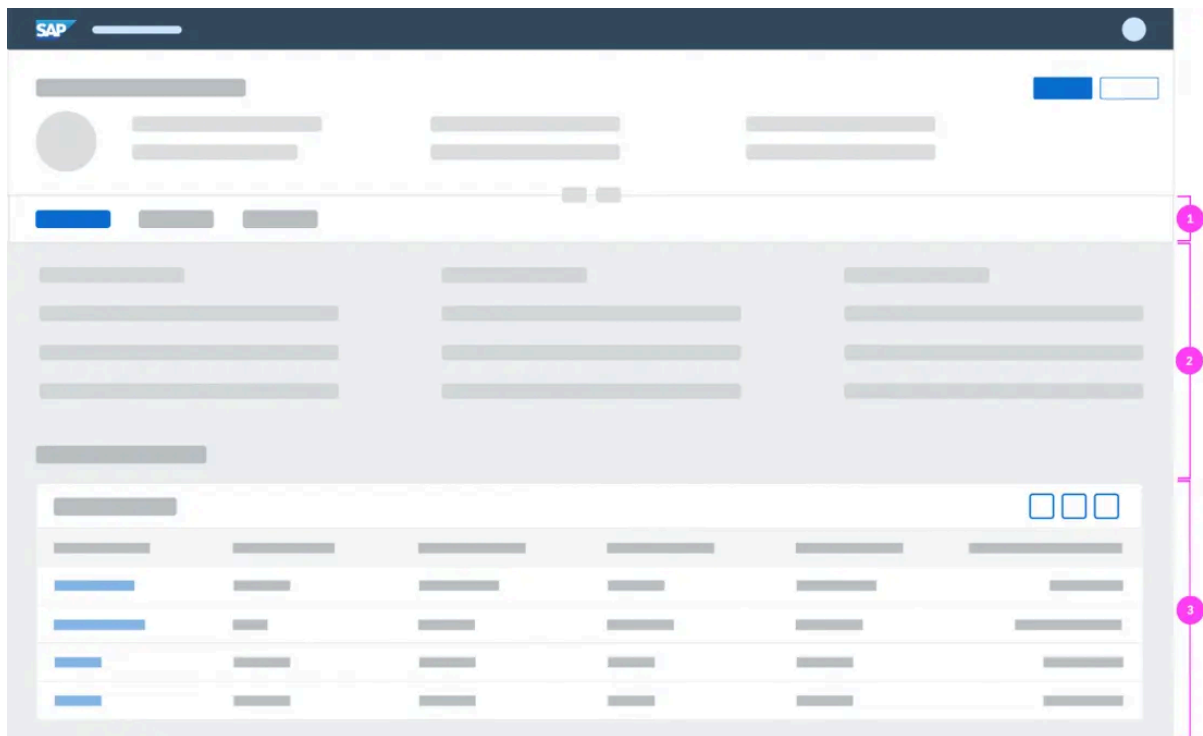

Object page – Tab navigation

1. Anchor/tab bar navigation
2. First section
3. Second section

If you set the tab bar property (`uselconTabBar = "true"`), the navigation bar displays tabs instead of anchors. The object page only supports text-only tabs; icon tabs and icon/text tabs are not available. The object page sections and subsections are reflected in the tab navigation: sections of the object page become the tabs, and subsections become the internal content of the tab. The tabs can have an item counter, which is displayed in parentheses next to the title of the tab.

[Feedback](#)



If the content of a section contains a control, for example a table, then we recommend to always display it, even if the control title and tab title are identical. This makes it easier for the user to orientate themselves.

Subnavigation

To make it easier to reach specific content on a long tab page, tabs can have subnavigation. Subnavigation is optional, but the default state is set to “true” and a dropdown arrow is shown next to the tab. Clicking on the dropdown arrow displays a dropdown menu with the subsection anchors for that tab. Applications can decide which tabs are enabled for anchor subnavigation by setting their property to “true”.

Content Area

The object page content consists of sections and subsections arranged in a column layout.

Sections

Sections are containers for subsections. They provide the basic structure for navigation and are directly reflected in the navigation bar.

The first section doesn't have a title.

All the following sections consist of:

1. Title with item counter (counter is optional)
2. Subsections

Sections cannot contain controls.

If a section contains only one subsection, the title of the subsection is used as the name of the section. In this case, there is no subsection submenu in the anchor bar.

Sections can only contain subsections, not content. Because of this, the object page

Subsections

Subsections are containers for actual content.

A subsection consists of:

1. Title with item counter (counter is optional)
2. Toolbar with actions (optional)
3. Content
4. Mixable related content (optional)
5. Controls inside subsection (optional)

If the subsection contains a table or a chart and the title is the same, you have the option to hide the subsection title.

Subsection content is arranged according to the column layout approach for the respective screen size.

[Feedback](#)



✓ Guidelines


If a section contains a control, like a table or a chart, and the title of the control is the same as the section title, then the section title can be hidden so that this title is only displayed once. This avoids unnecessary redundancies.

We recommend the same for subsection titles.

Developers can specify which content is shown initially, but the user can always choose to display everything by selecting the toggle button *Show More / Show Less* at the bottom right of the subsection.

Responsiveness

The content blocks in a subsection display in a row. The width of the row depends on the column layout for the respective screen size. If there is not enough space to display a content block, it wraps to the line below.

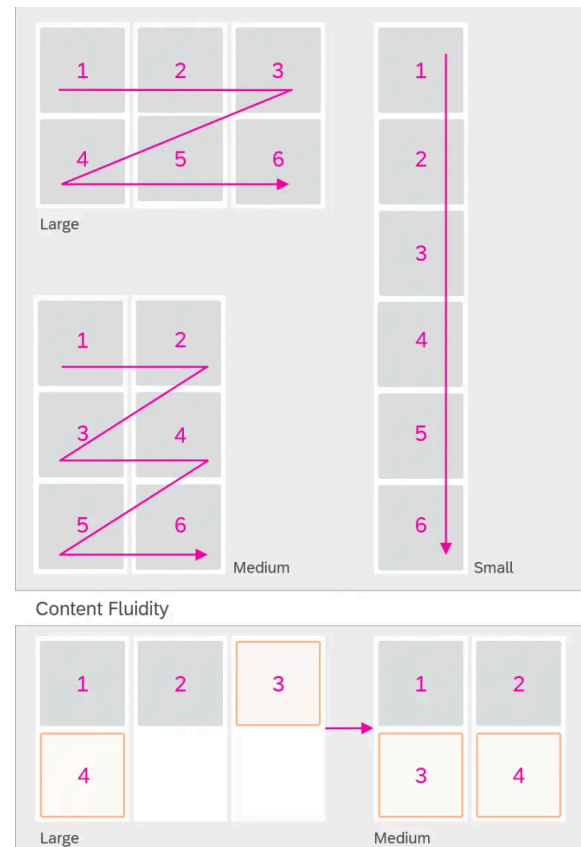

Object page – Content responsiveness

<> Developer Hint

For **non-SAP Fiori element object pages** only:

[Feedback](#)



set the width property to “auto”.



Forms within the Object Page

Form columns can be displayed with the standard number of columns or more to allow application teams to efficiently handle information density.

✓ Guidelines

We recommend you optimize the information density of forms on:

- Extra large screens that allow the display of 6 columns, if short titles are used.
- Large and medium screen that allow the display of more columns between the breakpoints for the screens.

For guidance on layout columns and content density for form content in the object page, see [Responsiveness](#).

Forms are located within subsections. They follow the column design of the object page, whereby each form group is arranged into a column. The title of the form is given by the subsection header. To improve access to the different forms we recommend always using one subsection per form, rather than placing multiple forms into one subsection.

To add actions, use the subsection header. For actions at the group level, use a group header. To prevent confusion, we recommend inserting actions only in one place, depending on the use case.

Use top-aligned labels for form fields. Top-aligned labels are known to reduce completion times and are the best approach for forms requiring localization or long labels. Using top-aligned labels also prevents issues with the spacing between the label and form field, which can occur with left- and right-aligned labels.

You can enable users to show and hide forms, groups or label-value field pairs using the *Show More / Show Less* toggle button.

SAP Fiori elements provide an option to show or hide fields on small screen devices based on their importance.



or "Low"), the fields are shown or hidden depending on the screen size. If you do not specify the UI.Importance annotation, the default is set to "High" and the field is shown on all device types.



Blocks

Layout blocks allow content to be aligned within the columns as follows:

- Layout 1: Occupies the maximum available horizontal space of one column.
- Layout 2: Occupies the horizontal space of only two columns. If there is only one column available, it occupies one column.
- Layout 3: Occupies the horizontal space of three columns. If there is only one column available, it occupies one column. If there are only two columns available, it occupies two columns.



Object page – Block base

To show and hide blocks, you can use a *Show More / Show Less* toggle button. Do not use the [panel](#) container in the object page content area.

Tables

When a section or subsection contains one table and no other content, remove the redundant table title so the section or subsection title serves as the table title. In the subsection, also reduce the vertical space.

Grid tables in sections must have at least 4 rows, and the maximum number of rows visible will depend on the window size. To prevent any need for the user to scroll to access the horizontal scrollbar, keep the table within the screen size limitations. This may not be possible in all use cases, for example, if the table contains a large data volume, then you must use two scrollbars.

[Feedback](#)



except for table comparison use cases.) To include more than 4 grid tables, place them in individual tabs.

To embed analytical tables or tree tables in an object page, use an object page with tabs and place each table in its own tab. If you are using a scrollable object page without tabs, use responsive or grid tables instead, and offer navigation to another page with the respective table type.

Depending on the number of table items, use one of the following loading behaviors:

Number of Table Items:	Use:
Up to 20	Items can be displayed
Up to 100	Lazy loading
More than 50-100 but less than 200	Tab navigation
More than 200 or tab approach is unsuitable	Navigation to another p

If a table is expected to have more than 20 items, use one of the 3 options below for long tables.

For all three options, we recommend **providing a search**, and if feasible, **sorting and filtering for the table** in the object page. **Avoid grouping.**

1. Lazy Loading Behavior (“More” button)

If you expect up to 100 items, use the [More button](#) of the responsive table. The initial number of items shown depends on the height of the rows. We recommend initially showing 10 items, but not more than 20. If there is more than one table in the object page, only use this option for tables with up to 50 expected items.

2. Tab Navigation

If you expect to have more than 50 to 100 items, but fewer than 200, using the object page with tab navigation instead of anchor navigation also solves the problems associated with long tables. To enable the scroll-to-load behavior, the table must be the only or last element within a tab.

3. Navigation to Another Page

Feedback



restrict the size of the table in the object page to a reasonable number of items. We recommend showing a preview of only 10 items, but not more than 20. This can be achieved using predefined filters and/or by sorting the table. If necessary, you can also set a fixed number of items (such as the top 10). To enable the user to work with the entire table, offer navigation to a separate page, such as a list report, subobject page, or dynamic page with the respective table type. To do this, place a right-aligned link below the table with the label *Show All (x)*, where x represents the total number of items in the table.

21718318237193	Lyngbyild	Candice Brown	01/11/2023	12,897.00 EUR
23797812373652	DelBant Industries	Richard Wilson	01/11/2023	12,897.00 EUR
24372738237927	Jolaga	Denise Smith	01/12/2023	12,897.00 EUR
25717388235263	Exotic Liquids	Paul Blevins	01/13/2023	12,897.00 EUR
25738726535211	DelBant Industries	Richard Wilson	01/13/2023	12,897.00 EUR
28363669229821	Jolaga	Denise Smith	01/15/2023	12,897.00 EUR
30818377389129	DelBant Industries	Richard Wilson	01/16/2023	12,897.00 EUR
33030203939291	Exotic Liquids	Paul Blevins	01/16/2023	12,897.00 EUR

Show All (423)

Table with navigation to a separate list report

Representation of Child Pages

In object pages with drilldown navigation, child pages are represented in two ways:

- Breadcrumbs: A breadcrumb is displayed above the object title. Limit the breadcrumb to the drilldown levels within the object page.
- Paging buttons: Up and down arrows in the [layout action area](#) allow the user to navigate between subitems without going back to the original list.

Footer Toolbar

The footer toolbar is used for closing and finalizing actions in:

- Edit and create mode, for example, *Save*, *Post*, *Accept*, *Reject*, and *Activate*
- Display mode, for example, *Approve*, *Accept*, and *Reject*





Feedback