



动手试一试

1、猴赛雷打篮球的函数play和跳绳的函数jump已经创建好了，添加下面哪条代码，能实现让猴赛雷在程序运行2秒后开始打篮球？（ ）

```
def jump():  
    print('猴赛雷去跳绳了')
```



```
def play():  
    print('猴赛雷去打篮球了')
```



A. clock.schedule(play, 2) B. clock.schedule(jump, 2)

C. clock.schedule(2, play) D. clock.schedule(2, jump)



动手试一试

2、想要在on_mouse_down()函数中修改全局变量 state 的值，下面哪段代码能正确地修改？（ ）

A. state = '初始状态'

```
def on_mouse_down():  
    state = '运行状态'  
    global state
```

B. state = '初始状态'

```
def on_mouse_down():  
    global state  
    state = '运行状态'
```

C. state = '初始状态'

```
global state  
def on_mouse_down():  
    state = '运行状态'
```


D. state = '初始状态'

```
def on_mouse_down():  
    state = '运行状态'
```



动手试一试

3、冷雪丰制作了一个海底模拟游戏，运行程序后窗口中有一条鱼。接着，每隔5秒会出现一条鱼。请问需要多久的时间，窗口中才能有5条鱼？（ ）

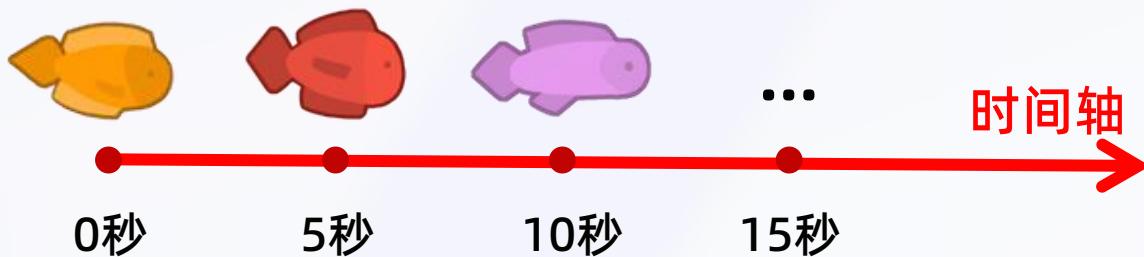

A. 15秒

B. 20秒

C. 25秒

D. 30秒