


← → ↻ ⓘ localhost:3000/users/Example/Jere

Terve Jere

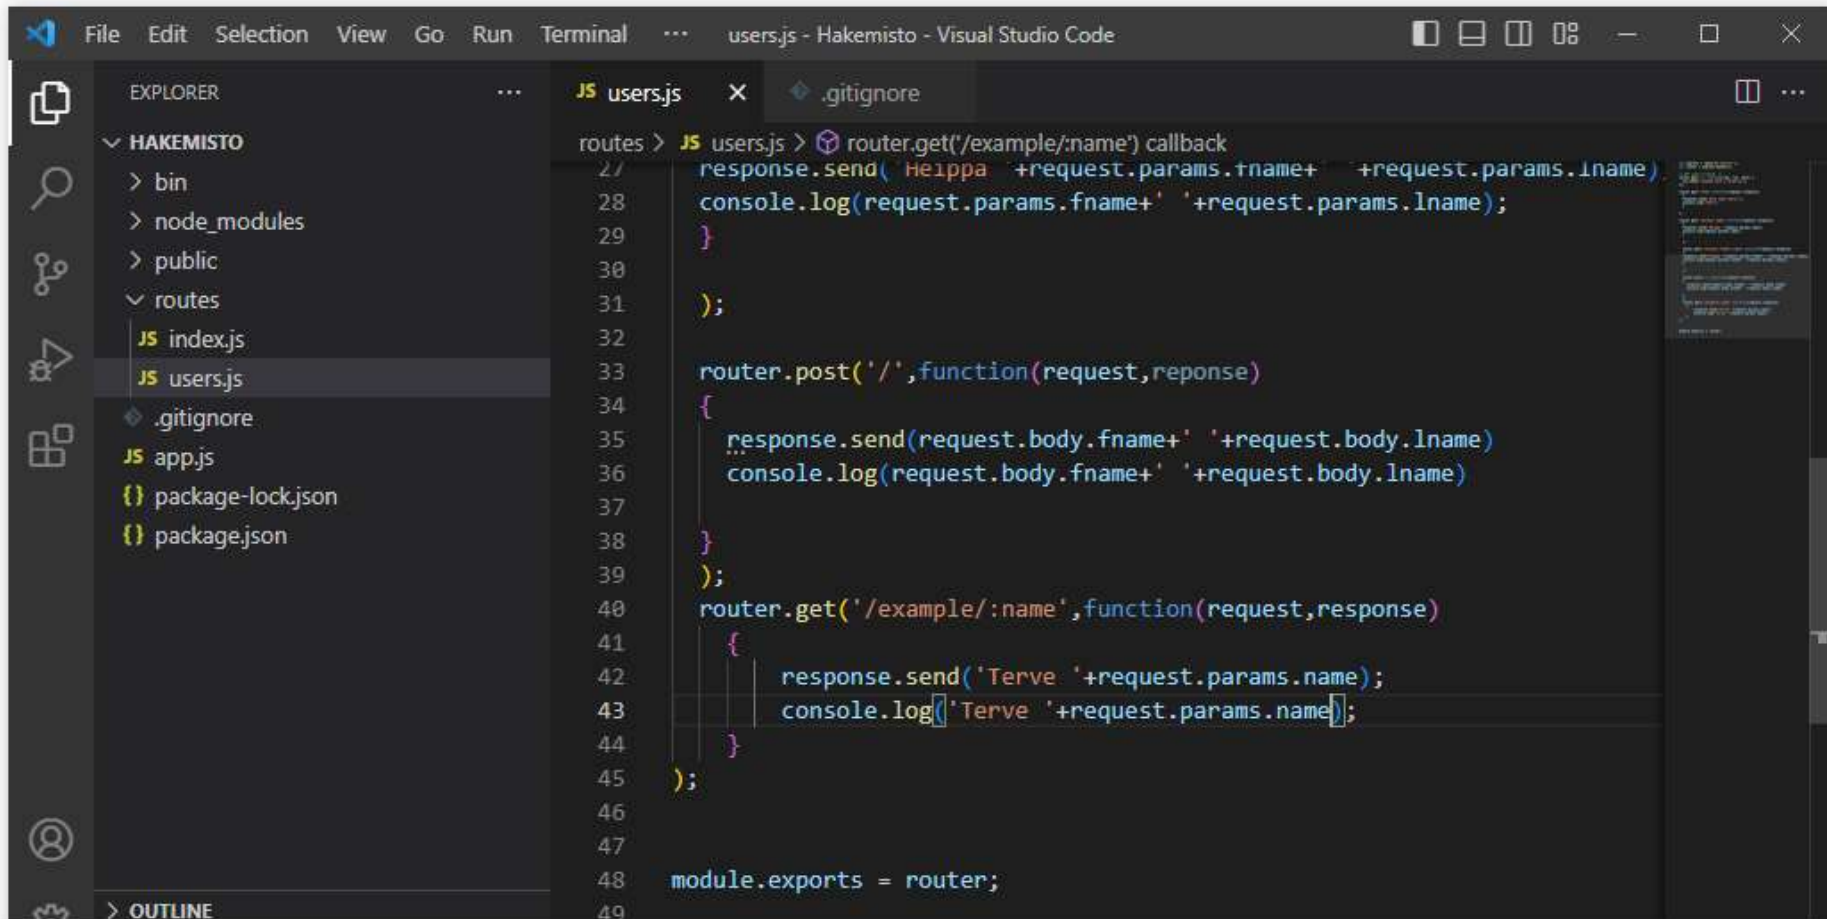

The image shows a Visual Studio Code editor window with the file explorer on the left, the main editor in the center, and a web browser at the top. The browser displays the text "Terve Jere". The file explorer shows a project named "HAKEMISTO" with files like bin, node_modules, public, routes, index.js, users.js, .gitignore, app.js, package-lock.json, and package.json. The main editor shows the content of users.js, which defines two routes: a GET route for "/example/:name" that sends a "Heippa" greeting and a POST route for "/" that sends the request body. The GET route handler is currently selected and highlighted.

```
27 routes > JS users.js > router.get('/example/:name') callback
28   response.send( 'Heippa ' +request.params.fname+ ' '+request.params.lname );
29   console.log(request.params.fname+ ' '+request.params.lname);
30 }
31 );
32
33 router.post('/',function(request,reponse)
34 {
35   response.send(request.body.fname+ ' '+request.body.lname)
36   console.log(request.body.fname+ ' '+request.body.lname)
37 }
38 );
39
40 router.get('/example/:name',function(request,response)
41 {
42   response.send('Terve ' +request.params.name);
43   console.log('Terve ' +request.params.name);
44 }
45 );
46
47
48 module.exports = router;
49
```