



Section 1 - Understanding Vue

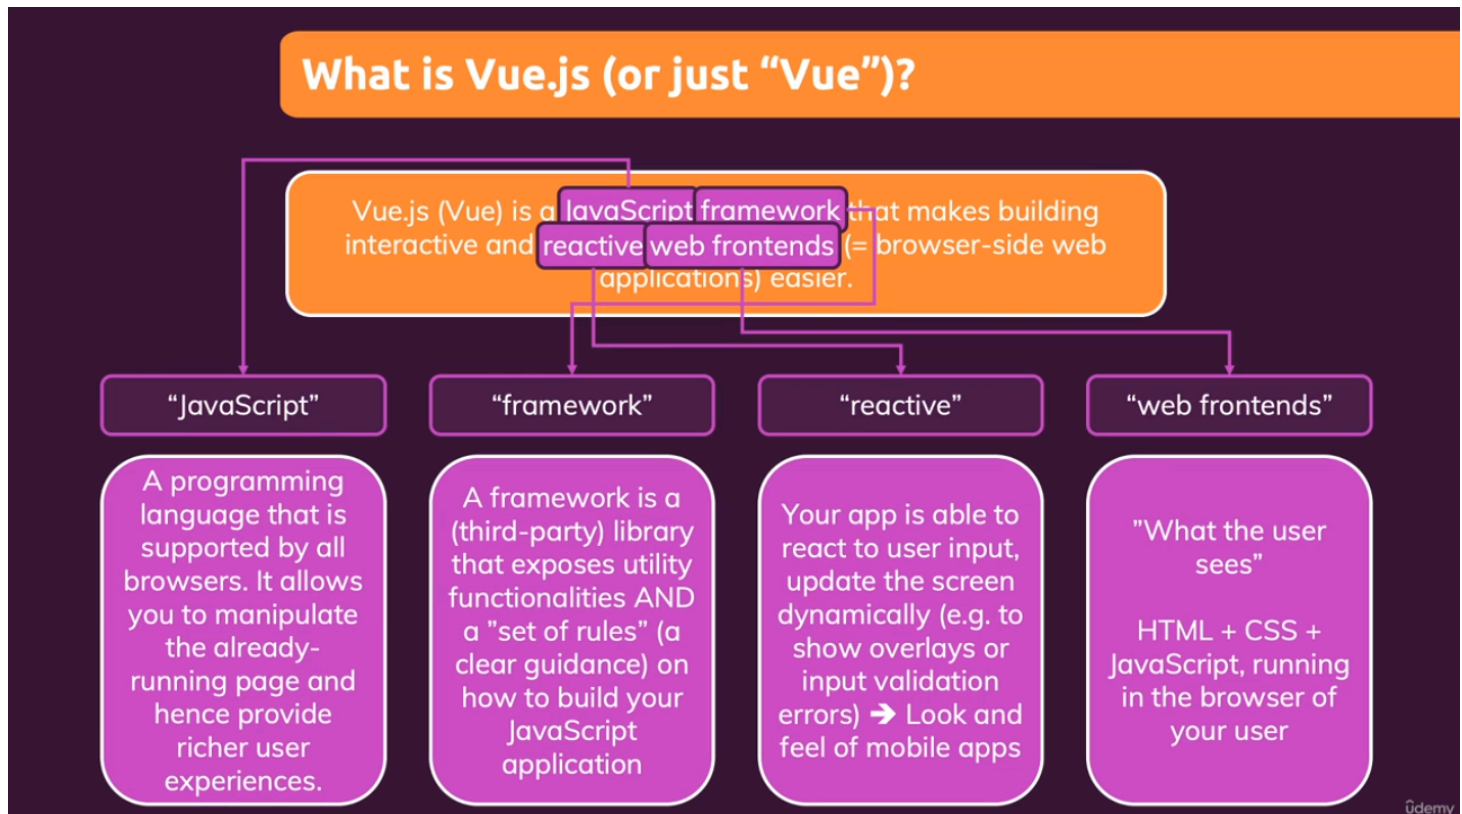

What is Vue.JS?

Vue is a **javascript framework** that help us to make **reactive web app**.

What are Different Ways To Use Vue JS?

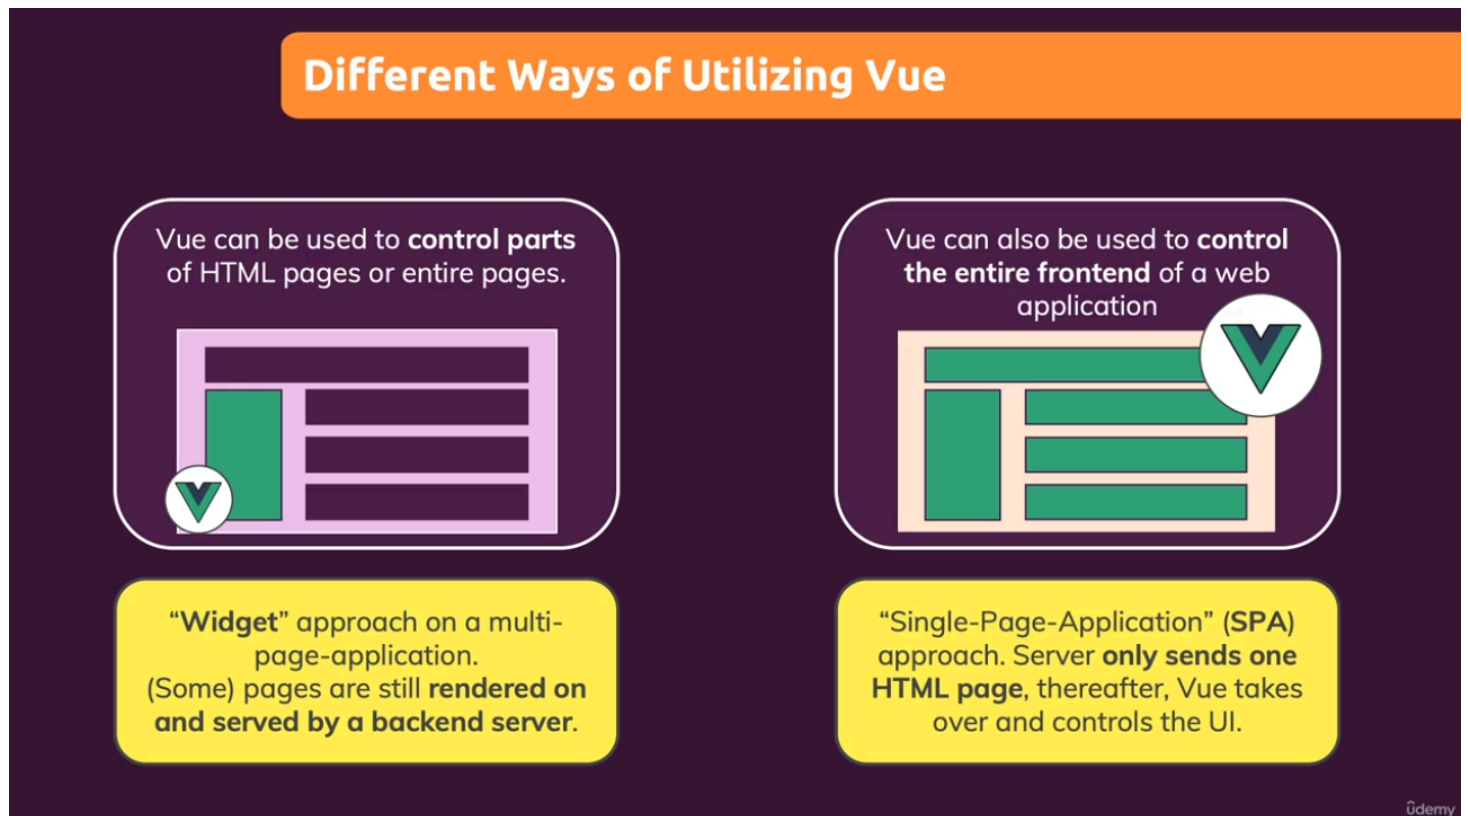

Vue can be used to **control parts of a HTML page** or it can be used to **control HTML page as a SPA**.

First Vue App

The image shows a code editor with two files: `app.js` and `index.html`. The editor is annotated with red arrows and numbered circles (1-8) explaining key Vue.js concepts and syntax.

Left Panel: `app.js`

```
1 Vue.createApp({
2   data() {
3     return {
4       goals: [],
5       enteredValue: ''
6     };
7   },
8   methods: {
9     addGoal() {
10      this.goals.push(this.enteredValue);
11      this.enteredValue = '';
12    }
13  }
14}).mount('#app');
```

Annotations for `app.js`:

- 2**: Once import is done, you can use `createApp` method provided by Vue object
- 3**: `createApp` accept data property that accepts a function and this function must return object with keys and value of data we want Vue to use.
- 5**: `createApp` also uses method property that accepts an object containing functions and listeners
- 8**: Finally, we need to use `mount` method to tell Vue which area in html special attributes are available.

Right Panel: `index.html`

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8" />
5   <meta name="viewport" content="width=device-width, initial-scale=1.0" />
6   <title>A First App</title>
7   <link rel="stylesheet" href="styles.css" />
8 </head>
9 <body>
10  <div id="app">
11    <div>
12      <label for="goal">Goal</label>
13      <input type="text" id="goal" v-model="enteredValue" />
14      <button v-on:click="addGoal">Add Goal</button>
15    </div>
16    <ul>
17      <li v-for="goal in goals">{{ goal }}</li>
18    </ul>
19  </div>
20  <script src="https://unpkg.com/vue@next"></script>
21  <script src="app.js"></script>
22 </body>
23 </html>
```

Annotations for `index.html`:

- 1**: One way to use Vue is to get its JS file from unpkg
- 4**: Now in html page we can pass the name of the property in v-model attribute
- 6**: we can pass this method using `v-on:click` attribute and pass `addGoal` method
- 7**: now using `v-for` attribute we can loop through list and using special syntax `{{ variable }}` we can use variable.

The bottom status bar shows: Ln 28, Col 48 | Spaces: 2 | UTF-8 | LF | JavaScript | Prettier