



# AGH

**AKADEMIA GÓRNICZO-HUTNICZA W KRAKOWIE  
WYDZIAŁ INFORMATYKI, ELEKTRONIKI I TELEKOMUNIKACJI**

**PODSTAWY BAZ DANYCH - PROJEKT I IMPLEMENTACJA  
SYSTEMU BAZODANOWEGO**

**SYSTEM ZARZĄDZANIA KONFERENCJAMI**

Maciej Moskal

## **1. Opis**

### **Opis problemu**

Projekt dotyczy systemu wspomagania działalności firmy organizującej konferencje/

### **Ogólne informacje**

Firma organizuje konferencje, które mogą być jedno- lub kilkudniowe. Klienci powinni móc rejestrować się na konferencje za pomocą systemu www. Klientami mogą być zarówno indywidualne osoby jak i firmy, natomiast uczestnikami konferencji są osoby (firma nie musi podawać od razu przy rejestracji listy uczestników - może zarezerwować odpowiednią ilość miejsc na określone dni oraz na warsztaty, natomiast na 2 tygodnie przed rozpoczęciem musi te dane uzupełnić - a jeśli sama nie uzupełni do tego czasu, to pracownicy dzwonią do firmy i ustalają takie informacje). Każdy uczestnik konferencji otrzymuje identyfikator imienny (+ ew. informacja o firmie na nim). Dla konferencji kilkudniowych, uczestnicy mogą rejestrować się na dowolne z tych dni.

### **Warsztaty**

Ponadto z konferencją związane są warsztaty, na które uczestnicy także mogą się zarejestrować - muszą być jednak zarejestrowani tego dnia na konferencję, aby móc w nich uczestniczyć. Kilka warsztatów może trwać równocześnie, ale uczestnik nie może zarejestrować się na więcej niż jeden warsztat, który trwa w tym samym czasie. Jest także ograniczona ilość miejsc na każdy warsztat i na każdy dzień konferencji. Część warsztatów może być płatna, a część jest darmowa.


### **Opłaty**

Opłata za udział w konferencji zależy nie tylko od zarezerwowanych usług, ale także od terminu ich rezerwacji - jest kilka progów ceny (progi ceny dotyczą tylko udziału w konferencji, cena warsztatów jest stała) i im bliżej rozpoczęcia konferencji, tym cena jest wyższa (jest także zniżka procentowa dla studentów i w takim wypadku przy rezerwacji trzeba podać nr legitymacji studenckiej). Na zapłatę klienci mają tydzień od rezerwacji na konferencję - jeśli do tego czasu nie pojawi się opłata, rezerwacja jest anulowana.

### **Raporty**

Dla organizatora najbardziej istotne są listy osobowe uczestników na każdy dzień konferencji i na każdy warsztat, a także informacje o płatnościach klientów. Ponadto organizator chciałby mieć informację o klientach, którzy najczęściej korzystają z jego usług. Specyfika firmy Firma organizuje średnio 2 konferencje w miesiącu, każda z nich trwa zwykle 2-3 dni, w tym średnio w każdym dniu są 4 warsztaty. Na każdą konferencję średnio rejestruje się 200 osób. Stworzona baza danych powinna zostać wypełniona w takim stopniu, aby odpowiadała 3-letniej działalności firmy

## 2. Diagram bazy danych

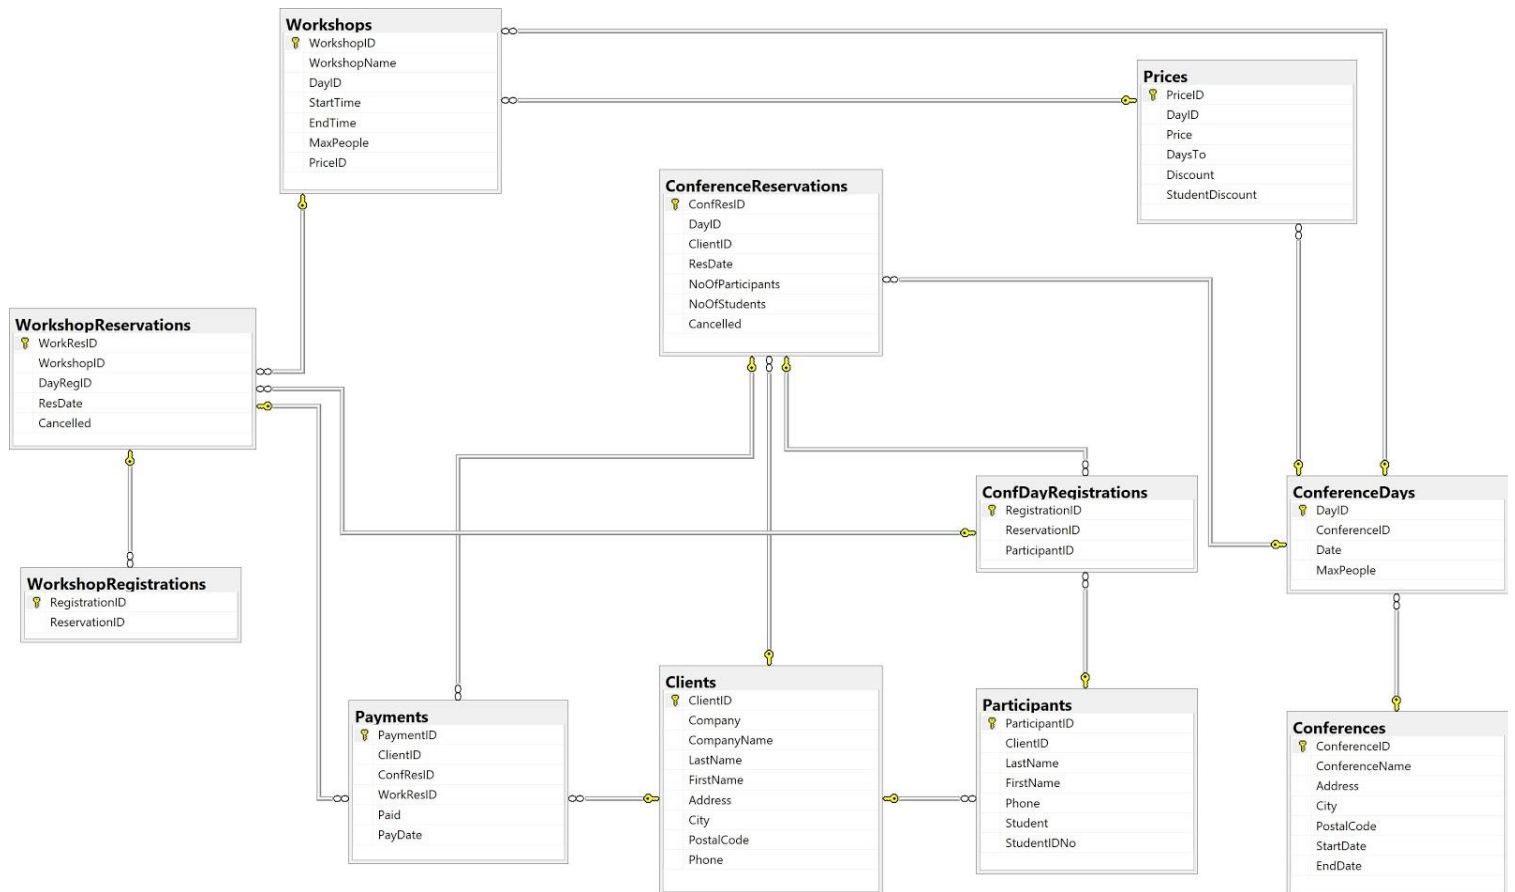

## 3. Tabele

**Conferences** – Tabela przechowuje informacje o konferencjach. Zawiera identyfikator (klucz główny), nazwę konferencji, miejsce, w którym odbywa się oraz datę rozpoczęcia i zakończenia. Sprawdzana jest poprawność wprowadzonych dat, tak aby niemożliwe było wpisanie konferencji kończącej się wcześniej niż data jej rozpoczęcia.

```

CREATE TABLE Conferences (
    ConferenceID int not null primary key identity (1,1),
    ConferenceName nvarchar(60) not null,
    Address nvarchar(50) not null,
    City nvarchar(40) not null,
    PostalCode nvarchar (10) not null,
    StartDate date not null,
    EndDate date not null ,
)
  
```

```

ALTER TABLE Conferences WITH CHECK ADD CONSTRAINT [StartDateBeforeEndDate]
CHECK ((StartDate<=EndDate))
  
```

**ConferenceDays** – Tabela przechowuje informacje o poszczególnych dniach konferencji. Posiada identyfikator dnia (klucz główny), identyfikator konferencji odwołujący się do klucza głównego tabeli Conferences oraz datę i maksymalną liczbę osób mogących wziąć udział w danym dniu konferencji (nie można podać ujemnej).

```

CREATE TABLE ConferenceDays (
    DayID int not null primary key identity(1,1),
    ConferenceID int not null foreign key references Conferences (ConferenceID),
    Date date not null,
    MaxPeople int not null CHECK (MaxPeople>=0),
)
  
```

**Prices** – Tabela przechowuje informacje o progach cenowych dla poszczególnych dni konferencji. Zawiera identyfikator ceny (klucz główny), identyfikator dnia, dla którego dany próg obowiązuje, cenę oraz liczbę oznaczającą do ilu dni przed konferencją można zapłacić za uczestnika tę cenę. Oprócz tego w tabeli zawarte są informacje o zniżce dla określonej wartości DaysTo oraz o zniżce dla studentów na ten dzień. Zarówno każda ze zniżek, jak i ich suma nie może być większa od 1.

```
CREATE TABLE Prices (  
    PriceID int not null primary key identity(1,1),  
    DayID int null foreign key references ConferenceDays(DayID),  
    Price numeric(2,2) not null CHECK (Price>0),  
    DaysTo int not null CHECK (DaysTo>0),  
    Discount numeric(2,2) not null DEFAULT 0 CHECK (DISCOUNT BETWEEN 0 AND 1),  
    StudentDiscount numeric(2,2) not null DEFAULT 0 CHECK (StudentDiscount BETWEEN 0  
        AND 1),  
)
```

```
ALTER TABLE Prices WITH CHECK ADD CONSTRAINT [SumDiscountsBetween0And1]  
CHECK ((Discount+StudentDiscount<=1))
```

**Workshops** – Tabela przechowuje informacje o warsztatach odbywających się podczas dni konferencji. Każdy z warsztatów ma identyfikator (klucz główny), nazwę, dzień, w którym się odbywa, czas rozpoczęcia i zakończenia, maksymalną liczbę uczestników oraz identyfikator ceny będący kluczem obcym. Podobnie jak w przypadku konferencji sprawdzane jest czy wprowadzony czas zakończenia jest późniejszy niż czas rozpoczęcia.

```
CREATE TABLE Workshops (  
    WorkshopID int not null primary key identity(1,1),  
    WorkshopName nvarchar(60) not null,  
    DayID int not null foreign key references ConferenceDays(DayID),  
    StartTime time(0) not null,  
    EndTime time(0) not null,  
    MaxPeople int not null CHECK (MaxPeople>=0),  
    PriceID int null foreign key references Prices(PriceID),  
)
```

```
ALTER TABLE Workshops WITH CHECK ADD CONSTRAINT [StartTimeBeforeEndTime]  
CHECK ((StartTime<EndTime))
```

**Clients** – Tabela przechowująca informacje o klientach. Dane w niej zawarte to identyfikator klienta (klucz główny), pole do zaznaczenia czy dany klient jest firmą, czy osobą, nazwa firmy (jeśli company=1), nazwisko i imię (w przypadku klienta będącego firmą może być to osoba kontaktowa), dane adresowe oraz numer telefonu.

```
CREATE TABLE Clients (  
    ClientID int not null primary key identity(1,1),  
    Company bit not null DEFAULT(0),  
    CompanyName nvarchar(40) null,  
    LastName nvarchar(25) null,  
    FirstName nvarchar(25) null,  
    Address nvarchar(50) null,  
    City nvarchar(40) null,  
    PostalCode nvarchar(10) null,  
    Phone nvarchar(15) not null CHECK(ISNUMERIC(Phone)=1),  
)
```

```
ALTER TABLE Clients WITH CHECK ADD CONSTRAINT [CompanyAndCompanyName]  
CHECK ((Company=1 AND CompanyName IS NOT NULL) OR (Company=0 AND CompanyName IS NULL))
```

**Participants** – Tabela przechowuje informacje o uczestnikach konferencji. Zawiera identyfikator uczestnika (klucz główny), identyfikator klienta, który rezerwował miejsce dla uczestnika, nazwisko i imię uczestnika, numer telefonu, pole do oznaczenia czy dana osoba jest studentem i jeśli tak to pole do wprowadzenia numeru jej legitymacji studenckiej.

```
CREATE TABLE Participants (
    ParticipantID int not null primary key identity(1,1),
    ClientID int not null foreign key references Clients(ClientID),
    LastName nvarchar(25) not null,
    FirstName nvarchar(25) not null,
    Phone nvarchar(15) not null CHECK(ISNUMERIC(Phone)=1),
    Student bit not null DEFAULT(0),
    StudentIDNo int null,
)

ALTER TABLE Participants WITH CHECK ADD CONSTRAINT [OnlyStudentWithIDNo]
CHECK ((Student=1 AND StudentIDNo IS NOT NULL) OR (Student=0 AND StudentIDNo IS NULL))
```

**ConferenceReservations** – Tabela przechowuje informacje o rezerwacjach na poszczególne dni konferencji. Zapisane w niej są identyfikator rezerwacji (klucz główny), klucze obce: identyfikatory klienta i dnia konferencji, data rezerwacji domyślnie ustawiana na dzień, w którym jest ona dokonywana, ilość uczestników, w tym ilość studentów oraz pole do zaznaczenia czy dana rezerwacja została anulowana.

```
CREATE TABLE ConferenceReservations (
    ConfResID int not null primary key identity(1,1),
    DayID int not null foreign key references ConferenceDays(DayID),
    ClientID int not null foreign key references Clients(ClientID),
    ResDate date not null DEFAULT GETDATE(),
    NoOfParticipants int not null CHECK (NoOfParticipants>0),
    NoOfStudents int not null CHECK (NoOfStudents>=0),
    Cancelled bit not null DEFAULT(0),
)

ALTER TABLE ConferenceReservations WITH CHECK ADD CONSTRAINT
[StudentsNotGreaterThanParticipants]
CHECK ((NoOfStudents<=NoOfParticipants))
```

**ConfDayRegistrations** – Tabela przechowuje informacje o rejestracjach na konferencje dokonywanych przez pojedynczych uczestników. W niej zapisywane są identyfikatory rejestracji (klucz główny), identyfikatory rezerwacji podawane przez uczestników oraz identyfikatory uczestników rejestrujących się.

```
CREATE TABLE ConfDayRegistrations (
    RegistrationID int not null primary key identity(1,1),
    ReservationID int not null foreign key references
        ConferenceReservations(ConfResID),
    ParticipantID int not null foreign key references Participants(ParticipantID),
)
```

**WorkshopReservations** – Tabela przechowuje informacje o rezerwacjach na warsztaty. Zawiera identyfikator rezerwacji (klucz główny), identyfikator warsztatu, na który dokonywana jest rezerwacja, identyfikator rejestracji na konferencję (uczestnik warsztatu musi być zarejestrowany na dany dzień), datę rezerwacji oraz pole do zaznaczenia czy dana rezerwacja została anulowana.

```
CREATE TABLE WorkshopReservations (
    WorkResID int not null primary key identity(1,1),
    WorkshopID int not null foreign key references Workshops(WorkshopID),
    DayRegID int not null foreign key references
        ConfDayRegistrations(RegistrationID),
    ResDate date not null DEFAULT GETDATE(),
    Cancelled bit not null DEFAULT(0),
)
```

**WorkshopRegistrations** – Tabela przechowuje informacje o rejestracjach na warsztaty. Zawiera identyfikator rejestracji (klucz główny) oraz identyfikator rezerwacji, który odnosi się do odpowiedniej rezerwacji warsztatu.

```
CREATE TABLE WorkshopRegistrations (  
    RegistrationID int not null primary key identity(1,1),  
    ReservationID int not null foreign key references  
        WorkshopReservations(WorkResID),  
)
```

**Payments** – Tabela przechowuje informacje o dokonanych opłatach. Posiada identyfikator opłaty (klucz główny), identyfikator klienta dokonującego jej, identyfikator rezerwacji konferencji lub rezerwacji warsztatu (jedno z tych pól jest puste, aby oddzielić opłaty za dni konferencji od tych za warsztaty), ilość pieniędzy, która została zapłacona i datę opłaty.

```
CREATE TABLE Payments (  
    PaymentID int not null primary key identity(1,1),  
    ClientID int not null foreign key references Clients(ClientID),  
    ConfResID int null foreign key references ConferenceReservations(ConfResID),  
    WorkResID int null foreign key references WorkshopReservations(WorkResID),  
    Paid numeric(2,2) null CHECK (Paid>0),  
    PayDate date null DEFAULT GETDATE(),  
)
```

```
ALTER TABLE PAYMENTS WITH CHECK ADD CONSTRAINT [ConferenceOrWorkshop]  
CHECK ((WorkResID IS NULL AND ConfResID IS NOT NULL) OR (WorkResID IS NOT NULL AND  
ConfResID IS NULL))  
GO
```

## 4. Indeksy

Indeksy zostały utworzone w tabelach na każdym z kluczy obcych, ponieważ istnieje możliwość że wartości tych pól będą rzadko się powtarzać, a dzięki zastosowaniu nieklastrowanych indeksów wyszukiwanie będzie szybsze.

```
CREATE NONCLUSTERED INDEX ConferenceDaysConferenceID ON ConferenceDays  
(  
    ConferenceID ASC  
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,  
DROP_EXISTING = OFF,  
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)  
  
CREATE NONCLUSTERED INDEX ConferenceReservationsDayID ON ConferenceReservations  
(  
    DayID ASC  
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,  
DROP_EXISTING = OFF,  
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)  
  
CREATE NONCLUSTERED INDEX ConferenceReservationsClientID ON ConferenceReservations  
(  
    ClientID ASC  
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,  
DROP_EXISTING = OFF,  
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)  
  
CREATE NONCLUSTERED INDEX ParticipantsClientID ON Participants  
(  
    ClientID ASC  
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,  
DROP_EXISTING = OFF,  
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)
```

```

CREATE NONCLUSTERED INDEX ConfDayRegistrationsReservationID ON ConfDayRegistrations
(
ReservationID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX ConfDayRegistrationsParticipantID ON ConfDayRegistrations
(
ParticipantID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX WorkshopReservationsWorkshopID ON WorkshopReservations
(
WorkshopID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX WorkshopReservationsDayRegID ON WorkshopReservations
(
DayRegID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX WorkshopsDayID ON Workshops
(
DayID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX WorkshopsPriceID ON Workshops
(
PriceID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX PricesDayID ON Prices
(
DayID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX WorkshopRegistrationReservationID ON WorkshopRegistrations
(
ReservationID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX PaymentsWorkResID ON Payments
(
WorkResID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

```

```

CREATE NONCLUSTERED INDEX PaymentsConfResID ON Payments
(
ConfResID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

CREATE NONCLUSTERED INDEX PaymentsClientID ON Payments
(
ClientID ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, SORT_IN_TEMPDB = OFF,
DROP_EXISTING = OFF,
ONLINE = OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON)

```

## 5. Widoki

**MostPopularConferences** – Widok 100 najpopularniejszych konferencji uporządkowanych malejąco według średniej ilości osób przypadających na jej jeden dzień.

```

CREATE VIEW MostPopularConferences
AS
SELECT TOP 100 c.ConferenceName, c.Address, c.City, c.startDate, c.endDate,
(SUM(cr.NoOfParticipants) / (DATEDIFF(day,c.StartDate,c.EndDate)+1)) AS
AverageParticipantsPerDay
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
GROUP BY c.ConferenceID, c.ConferenceName, c.Address, c.City, c.startDate, c.endDate
ORDER BY AverageParticipantsPerDay DESC
GO

```

**MostPopularWorkshops** – Widok 100 najpopularniejszych warsztatów uporządkowanych malejąco według ilości uczestników.

```

CREATE VIEW MostPopularWorkshops
AS
SELECT TOP 100 w.WorkshopName, c.ConferenceName, cd.Date, COUNT(wr.WorkResID) AS
Participants
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN Workshops w ON w.DayID=cd.DayID
INNER JOIN WorkshopReservations wr ON wr.WorkshopID=w.WorkshopID AND wr.Cancelled=0
GROUP BY w.WorkshopID,w.WorkshopName, c.ConferenceName, cd.Date
ORDER BY Participants DESC
GO

```

**AvailableDays** – Widok prezentujący dni konferencji, które dopiero się odbędą i są jeszcze wolne miejsca.

```

CREATE VIEW AvailableDays
AS
SELECT c.ConferenceName, c.Address, c.City, cd.Date, cd.MaxPeople, (cd.MaxPeople-
SUM(cr.NoOfParticipants)) AS FreePlaces
FROM Conferences c INNER JOIN ConferenceDays cd ON c.conferenceID=cd.conferenceID
AND cd.Date>=GETDATE()
INNER JOIN ConferenceReservations cr ON cd.dayID=cr.DayID AND cr.Cancelled=0
GROUP BY cr.DayID, c.ConferenceName,c.Address, c.City, cd.Date,cd.MaxPeople
GO

```



**AvailableWorkshops** - Widok prezentujący warsztaty, które dopiero się odbędą i są jeszcze wolne miejsca.

```
CREATE VIEW AvailableWorkshops
AS
SELECT w.WorkshopName, c.ConferenceName, c.Address, c.City, cd.Date,
w.MaxPeople, (w.MaxPeople-COUNT(wr.WorkResID)) AS FreePlaces
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID AND
cd.Date>=GETDATE()
INNER JOIN Workshops w ON w.DayID=cd.DayID
INNER JOIN WorkshopReservations wr ON wr.WorkshopID=w.WorkshopID AND wr.Cancelled=0
GROUP BY w.WorkshopName, c.ConferenceName, c.Address, c.City, cd.Date, w.MaxPeople
GO
```

**UnpaidConferenceReservations** – Widok wyświetlający dane klientów oraz dni konferencji, na które klienci nie dokonali jeszcze opłat oraz ilość dni pozostałych na opłacenie rezerwacji.

```
CREATE VIEW UnpaidConferenceReservations
AS
SELECT DISTINCT cl.CompanyName, cl.LastName,cl.FirstName, cl.Phone, c.ConferenceName,
cd.Date, (7-DATEDIFF(day,cr.ResDate,GETDATE())) AS DaysLeft
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN Prices pr ON cd.DayID=pr.DayID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
LEFT OUTER JOIN Payments p ON p.ClientID=cl.ClientID
WHERE p.PaymentID IS NULL OR p.Paid<((cr.NoOfParticipants-
cr.NoOfStudents)*(pr.Price*(1-pr.Discount))+cr.NoOfStudents*(pr.Price*(1-pr.Discount-
pr.StudentDiscount)))
AND pr.DaysTo=(SELECT TOP 1 pri.DaysTo FROM Prices pri WHERE pri.DayID=pr.DayID AND
DATEDIFF(day,cr.ResDate,cd.Date)>=pri.DaysTo ORDER BY pri.DaysTo)
GO
```

**UnpaidWorkshopReservations** - Widok wyświetlający dane uczestników oraz warsztatów, na które rezerwacje jeszcze nie zostały opłacone i ilość dni pozostałych na opłacenie rezerwacji.

```
CREATE VIEW UnpaidWorkshopReservations
AS
SELECT DISTINCT p.LastName,p.FirstName, p.Phone, w.WorkshopName, c.ConferenceName,
cd.Date, (7-DATEDIFF(day,wr.ResDate,GETDATE())) AS DaysLeft
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN Workshops w ON cd.DayID=w.DayID
INNER JOIN Prices pr ON w.PriceID=pr.PriceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
INNER JOIN WorkshopReservations wr ON cdr.RegistrationID=wr.DayRegID
INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
LEFT OUTER JOIN Payments pay ON pay.ClientID=p.ParticipantID
WHERE pay.PaymentID IS NULL OR pay.Paid<pr.Price
GO
```

**ClientsHistory** – Widok pozwalający na przeglądnięcie statystyk klientów: ilość rezerwacji na dni konferencji, łączna ilość uczestników i ilość anulowanych rezerwacji

```
CREATE VIEW ClientsHistory
AS
SELECT cl.CompanyName, cl.LastName, cl.FirstName, COUNT(cr.ConfResID) AS
DaysReservations, SUM(cr.NoOfParticipants) AS SumParticipants, COUNT(cr.Cancelled) AS
CancelledReservations
FROM Clients cl INNER JOIN ConferenceReservations cr ON cl.ClientID=cr.ClientID
GROUP BY cl.CompanyName, cl.LastName, cl.FirstName, cr.Cancelled
GO
```

**BestClients** – Widok przedstawiający 100 najlepszych klientów, tzn. takich, którzy zarezerwowali łącznie na wszystkie konferencje najwięcej miejsc.

```
CREATE VIEW BestClients
AS
SELECT TOP 100 cl.CompanyName, cl.LastName, cl.FirstName, COUNT(cr.ConfResID) AS
DaysReservations, SUM(cr.NoOfParticipants) AS Participants
FROM Clients cl INNER JOIN ConferenceReservations cr ON cl.ClientID=cr.ClientID AND
cr.Cancelled=0
GROUP BY cl.CompanyName, cl.LastName, cl.FirstName, cr.Cancelled
ORDER BY Participants,DaysReservations DESC
GO
```

**CancelledConferenceReservations** – Widok anulowanych rezerwacji na dni konferencji.

```
CREATE VIEW CancelledConferenceReservations
AS
SELECT cl.ClientID, cr.ConfResID, c.ConferenceName, cd.Date, cr.NoOfParticipants
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=1
INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
GO
```

**CancelledWorkshopReservations** – Widok anulowanych rezerwacji na warsztaty.

```
CREATE VIEW CancelledWorkshopReservations
AS
SELECT p.ParticipantID, wr.WorkResID, c.ConferenceName, w.WorkshopName, cd.Date
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
INNER JOIN WorkshopReservations wr ON cdr.RegistrationID=wr.DayRegID AND wr.Cancelled=1
INNER JOIN Workshops w ON wr.WorkshopID=wr.WorkshopID
INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
GO
```

**ConferenceDaysReservedButNotRegistered** – Widok rezerwacji na dni konferencji, które jeszcze nie zostały jeszcze w całości wypełnione zarejestrowanymi uczestnikami.

```
CREATE VIEW ConferenceDaysReservedButNotRegistered
AS
SELECT c.ConferenceName, cd.Date, cl.CompanyName, cl.LastName, cl.FirstName,
DATEDIFF(day,GETDATE(),c.StartDate) AS DaysLeftForRegistration, cr.NoOfParticipants,
COUNT (cdr.RegistrationID) AS RegisteredNow
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
INNER JOIN Clients cl ON cr.clientID=cl.ClientID
LEFT OUTER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
WHERE (SELECT COUNT(cdr2.RegistrationID) FROM ConfDayRegistrations cdr2 WHERE
cdr.RegistrationID=cdr2.RegistrationID)<cr.NoOfParticipants
GROUP BY c.ConferenceName, cd.Date, cl.CompanyName, cl.LastName, cl.FirstName,
c.StartDate,cr.NoOfParticipants
GO
```

**UpcomingConfDaysPrices** – Widok przedstawiający nadchodzące dni konferencji i ich ceny za miejsce wraz ze zniżkami.

```
CREATE VIEW UpcomingConfDaysPrices
AS
SELECT c.ConferenceName, cd.Date, p.Price, p.DaysTo, p.Discount, p.StudentDiscount
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN Prices p ON p.DayID=cd.DayID
WHERE p.DaysTo<DATEDIFF(day,GETDATE(),cd.Date)
GO
```

**OverpaidConferences** – Widok przedstawiający klientów i ich rezerwacje dni konferencji, za które zapłacili za dużo.

```
CREATE VIEW OverpaidConferences
AS
SELECT
c.ConferenceName,cd.Date,cl.ClientID,cl.CompanyName,cl.LastName,cl.FirstName,cl.Phone,
(pay.Paid-(cr.NoOfParticipants-cr.NoOfStudents)*(p.Price*(1-
p.Discount))+cr.NoOfStudents*(p.Price*(1-p.Discount-p.StudentDiscount))) AS Difference
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
INNER JOIN Prices p ON p.DayID=cd.DayID AND p.DaysTo=(SELECT TOP 1 pri.DaysTo FROM
Prices pri WHERE pri.DayID=p.DayID AND DATEDIFF(day,cr.ResDate,cd.Date)>=pri.DaysTo
ORDER BY pri.DaysTo)
INNER JOIN Payments pay ON cr.ConfResID=pay.ConfResID AND cl.ClientID=pay.ClientID
WHERE (pay.Paid-(cr.NoOfParticipants-cr.NoOfStudents)*(p.Price*(1-
p.Discount))+cr.NoOfStudents*(p.Price*(1-p.Discount-p.StudentDiscount)))>0
GO
```

**OverpaidWorkshops** - Widok przedstawiający uczestników i ich rezerwacje na warsztaty, za które zapłacili za dużo.

```
CREATE VIEW OverpaidWorkshops
AS
SELECT c.ConferenceName,
w.WorkshopName,cd.Date,p.ParticipantID,p.LastName,p.FirstName,p.Phone, (pay.Paid-
pr.Price) AS Difference
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
INNER JOIN WorkshopReservations wr ON cdr.RegistrationID=wr.DayRegID AND wr.Cancelled=0
INNER JOIN Workshops w ON wr.WorkshopID=w.WorkshopID
INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
INNER JOIN Prices pr ON w.PriceID=pr.PriceID
INNER JOIN Payments pay ON pay.WorkResID=wr.WorkResID
WHERE (pay.Paid-pr.Price)>0
GO
```

**CurrentReservationsRegisteredParticipants** – Widok przedstawiający rezerwacje na nadchodzące dni konferencji oraz liczbę zarejestrowanych uczestników w ramach tej rezerwacji.

```
CREATE VIEW CurrentReservationsRegisteredParticipants
AS
SELECT cl.ClientID, cl.CompanyName, cl.Firstname, cl.Lastname, cr.ConfResID,
c.ConferenceName, cd.Date, cr.NoOfParticipants, COUNT(cdr.RegistrationID) AS Registered
FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID AND
cd.Date>=GETDATE()
INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND Cancelled=0
INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
GROUP BY cl.ClientID, cl.CompanyName, cl.Firstname, cl.Lastname, cr.ConfResID,
c.ConferenceName, cd.Date, cr.NoOfParticipants
GO
```

## 6. Procedury

### AddConferenceDay – Dodawanie dnia konferencji

```
CREATE PROCEDURE AddConferenceDay
    @ConferenceID int,
    @Date date,
    @MaxPeople int
AS
BEGIN
    INSERT INTO ConferenceDays (
        ConferenceID, Date, MaxPeople
    )
    VALUES (
        @ConferenceID, @Date, @MaxPeople
    )
END
GO
```

### AddConference – Dodawanie konferencji

```
CREATE PROCEDURE AddConference
    @ConferenceName nvarchar(60),
    @Address nvarchar(50),
    @City nvarchar(40),
    @PostalCode nvarchar(10),
    @StartDate date,
    @EndDate date,
    @MaxPeople int
AS
BEGIN
    SET NOCOUNT ON;
    IF (@StartDate < GETDATE())
    BEGIN
        RAISERROR('Conference can''t start in the past',14,1)
        RETURN
    END
    INSERT INTO Conferences (
        ConferenceName, Address, City, PostalCode, StartDate, EndDate
    )
    VALUES (
        @ConferenceName, @Address, @City, @PostalCode, @StartDate, @EndDate
    )
    DECLARE @ConferenceID int
    SET @ConferenceID = @@IDENTITY
    DECLARE @i int
    SET @i = 0
    DECLARE @d date
    WHILE @i <= DATEDIFF(day, @StartDate, @EndDate)
    BEGIN
        SET @d = DATEADD(day, @i, @StartDate)
        EXEC AddConferenceDay
            @ConferenceID,
            @d,
            @MaxPeople
        SET @i = @i + 1
    END
END
GO
```

## AddPrice – Dodawanie ceny (progu)

```
CREATE PROCEDURE AddPrice
    @DayID int,
    @Price numeric(2,2),
    @DaysTo int,
    @Discount numeric(2,2),
    @StudentDiscount numeric (2,2)
AS
BEGIN

    SET NOCOUNT ON;
    INSERT INTO Prices(
        Price,DaysTo,Discount,StudentDiscount, DayID
    )
    VALUES (
        @Price,@DaysTo,@Discount,@StudentDiscount,@DayID
    )
END
GO
```

## AddWorkshop – Dodawanie warsztatu

```
CREATE PROCEDURE AddWorkshop
    @WorkshopName nvarchar(60),
    @DayID int ,
    @StartTime time,
    @EndTime time,
    @MaxPeople int,
    @PriceID int
AS
BEGIN
    SET NOCOUNT ON;
    INSERT INTO Workshops(
        WorkshopName,DayID,StartTime,EndTime,MaxPeople,PriceID
    )
    VALUES (
        @WorkshopName, @DayID, @StartTime, @EndTime, @MaxPeople, @PriceID
    )
END
GO
```

## AddClient – Dodawanie klienta

```
CREATE PROCEDURE AddClient
    @Company bit,
    @CompanyName nvarchar(40),
    @LastName nvarchar(25),
    @FirstName nvarchar(25),
    @Address nvarchar(50),
    @City nvarchar(40),
    @PostalCode nvarchar(10),
    @Phone nvarchar(15)
AS
BEGIN
    SET NOCOUNT ON;
    INSERT INTO Clients(
        Company,CompanyName,LastName,FirstName,Address,City,PostalCode,Phone
    )
    VALUES (
        @Company,@CompanyName,@LastName,@FirstName,@Address,@City,@PostalCode,@Phone
    )
END
GO
```

### AddParticipant – Dodawanie uczestnika

```
CREATE PROCEDURE AddParticipant
    @ClientID int,
    @LastName nvarchar(25),
    @Firstname nvarchar(25),
    @Phone nvarchar(15),
    @Student bit,
    @StudentIDNo integer
AS
BEGIN
    SET NOCOUNT ON;
    INSERT INTO Participants(
        ClientID, LastName, FirstName, Phone, Student, StudentIDNo
    )
    VALUES (
        @ClientID, @LastName, @FirstName, @Phone, @Student, @StudentIDNo
    )
END
GO
```

### MakeConfDayReservation – Dokonanie rezerwacji na dzień konferencji

```
CREATE PROCEDURE MakeConfDayReservation
    @DayID int,
    @ClientID int,
    @NoOfParticipants int,
    @NoOfStudents int
AS
BEGIN
    IF GETDATE() > (SELECT Date FROM ConferenceDays WHERE DayID=@DayID)
    BEGIN
        RAISERROR('Can''t make reservation for past conference day',14,1)
        RETURN
    END
    SET NOCOUNT ON;
    INSERT INTO ConferenceReservations(
        DayID, ClientID, NoOfParticipants, NoOfStudents
    )
    VALUES (
        @DayID, @ClientID, @NoOfParticipants, @NoOfStudents
    )
END
GO
```

## MakeConferenceReservation – Dokonanie rezerwacji na całą konferencję (każdy z jej dni)

```
CREATE PROCEDURE MakeConferenceReservation
    @ConferenceID int,
    @ClientID int,
    @NoOfParticipants int,
    @NoOfStudents int
AS
BEGIN
    IF GETDATE() > (SELECT StartDate FROM Conferences WHERE ConferenceID=@ConferenceID)
    BEGIN
        RAISERROR('Can''t make reservation for past conference',14,1)
        RETURN
    END
    SET NOCOUNT ON;
    DECLARE @i int
    SET @i=0
    WHILE @i <= DATEDIFF(day, (SELECT StartDate FROM Conferences WHERE
        ConferenceID=@ConferenceID), (SELECT EndDate FROM Conferences WHERE
        ConferenceID=@ConferenceID))
    BEGIN
        DECLARE @DayID int
        SET @DayID = (SELECT DayID FROM ConferenceDays cd INNER JOIN Conferences c
            ON cd.ConferenceID=c.ConferenceID WHERE c.ConferenceID=@ConferenceID AND
            cd.Date=DATEADD(day,@i,c.StartDate))
        EXECUTE MakeConfDayReservation
            @DayID,
            @ClientID,
            @NoOfParticipants,
            @NoOfStudents
        SET @i=@i+1
    END
END
GO
```

## MakeWorkshopReservation – Dokonanie rezerwacji na warsztat

```
CREATE PROCEDURE MakeWorkshopReservation
    @WorkshopID int,
    @DayRegID int
AS
BEGIN
    IF GETDATE() > (SELECT cd.Date FROM Workshops w INNER JOIN ConferenceDays cd ON
        w.DayID=cd.DayID WHERE WorkshopID=@WorkshopID)
    BEGIN
        RAISERROR('Can''t make reservation for past workshop',14,1)
        RETURN
    END
    SET NOCOUNT ON;
    INSERT INTO WorkshopReservations (
        WorkshopID, DayRegID
    )
    VALUES (
        @WorkshopID, @DayRegID
    )
END
GO
```

## RegisterToConferenceDay – Dokonanie rejestracji na dzień konferencji

```
CREATE PROCEDURE RegisterToConferenceDay
    @ReservationID int,
    @ParticipantID int,
    @ClientID int,
    @LastName nvarchar(25),
    @Firstname nvarchar(25),
    @Student bit,
    @StudentIDNo integer
AS
BEGIN
    IF ((SELECT cr.Cancelled FROM ConfDayRegistrations cdr INNER JOIN
    ConferenceReservations cr ON cdr.ReservationID=cr.ConfResID WHERE
    cr.ConfResID=@ReservationID)=1)
    BEGIN
        RAISERROR ('Can't register. Reservation was cancelled.',14,1)
        RETURN
    END
    SET NOCOUNT ON;
    IF (@ParticipantID IS NULL)
    BEGIN
        EXECUTE AddParticipant
            @ClientID,
            @LastName,
            @Firstname,
            @Student,
            @StudentIDNo
        SET @ParticipantID=@@IDENTITY
    END
    INSERT INTO ConfDayRegistrations (
        ReservationID, ParticipantID
    )
    VALUES (
        @ReservationID, @ParticipantID
    )
END
GO
```

## RegisterToWorkshop – Dokonanie rejestracji na warsztat

```
CREATE PROCEDURE RegisterToWorkshop
    @ReservationID int
AS
BEGIN
    IF (SELECT wr.Cancelled FROM WorkshopReservations wr INNER JOIN Workshops w
    ON wr.WorkshopID=w.WorkshopID WHERE wr.WorkResID=@ReservationID)=1
    BEGIN
        RAISERROR ('Can't register. Reservation was cancelled',14,1)
        RETURN
    END
    SET NOCOUNT ON;
    INSERT INTO WorkshopRegistrations (
        ReservationID
    )
    VALUES (
        @ReservationID
    )
END
GO
```



## MakeConfResPayment – Opłacenie rezerwacji na konferencję

```
CREATE PROCEDURE MakeConfResPayment
    @ClientID int,
    @ConfResID int,
    @Paid numeric(2,2)
AS
BEGIN
    SET NOCOUNT ON;
    INSERT INTO Payments(
        ClientID, ConfResID, Paid
    )
    VALUES (
        @ClientID, @ConfResID, @Paid
    )
END
GO
```

## MakeWorkResPayment – Opłacenie rezerwacji na warsztat

```
CREATE PROCEDURE MakeWorkResPayment
    @ClientID int,
    @WorkResID int,
    @Paid numeric(2,2)
AS
BEGIN
    SET NOCOUNT ON;
    INSERT INTO Payments(
        ClientID, WorkResID, Paid
    )
    VALUES (
        @ClientID, @WorkResID, @Paid
    )
END
GO
```

## PayForWholeReservation – Opłata za całą rezerwację na dzień konferencji

```
CREATE PROCEDURE PayForWholeReservation
    @ClientID int,
    @ConfResID int
AS
BEGIN
    SET NOCOUNT ON;
    DECLARE @Paid int
    SET @Paid=(SELECT (p.Price*(cr.NoOfParticipants-cr.NoOfStudents)*(1-
        Discount)+p.Price*cr.NoOfStudents*(1-StudentDiscount-Discount)) FROM
        Clients cl INNER JOIN ConferenceReservations cr ON cl.ClientID=cr.ClientID
        INNER JOIN ConferenceDays cd ON cr.DayID=cd.DayID
        INNER JOIN Prices p ON p.DayID=cd.DayID
        WHERE ConfResID=@ConfResID AND p.DaysTo=(SELECT TOP 1 DaysTo FROM Prices
        WHERE DATEDIFF(day,cr.ResDate,cd.Date)>=DaysTo ORDER BY DaysTo)
    )
    INSERT INTO Payments(
        ClientID, ConfResID, Paid
    )
    VALUES (
        @ClientID, @ConfResID, @Paid
    )
END
GO
```

## GenerateIdentifiers – Wygenerowanie identyfikatorów uczestników danej konferencji

```
CREATE PROCEDURE GenerateIdentifiers
```

```
    @ConferenceID int
```

```
AS
```

```
BEGIN
```

```
    SELECT DISTINCT (CONVERT(nvarchar(8),p.ParticipantID)+' : '+p.FirstName+' '+p.LastName+', '+cl.CompanyName) AS Identifier
    FROM ConferenceDays cd INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
    AND Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
    INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
    INNER JOIN Participants p ON cl.ClientID=p.ClientID
    INNER JOIN ConfDayRegistrations cdr2 ON p.ParticipantID=cdr2.ParticipantID
    WHERE cd.ConferenceID=@ConferenceID AND cl.Company=1
    UNION
    SELECT DISTINCT (CONVERT(nvarchar(8),p.ParticipantID)+' : '+p.FirstName+' '+p.LastName) AS Identifier
    FROM ConferenceDays cd INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
    AND Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
    INNER JOIN Clients cl ON cr.ClientID=cl.ClientID
    INNER JOIN Participants p ON cl.ClientID=p.ClientID
    INNER JOIN ConfDayRegistrations cdr2 ON p.ParticipantID=cdr2.ParticipantID
    WHERE cd.ConferenceID=@ConferenceID AND cl.Company=0
```

```
END
```

```
GO
```

## MyConferences – Sprawdzenie konferencji, na które zarejestrowany jest dany uczestnik

```
CREATE PROCEDURE MyConferences
```

```
    @ParticipantID int
```

```
AS
```

```
BEGIN
```

```
    SELECT c.ConferenceName,c.Address,c.City,c.PostalCode,cd.Date
    FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
    INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
    INNER JOIN Prices pr ON cd.DayID=pr.DayID
    AND pr.DaysTo=(SELECT TOP 1 pr2.DaysTo FROM Prices pr2 WHERE pr2.DayID=pr.DayID
    AND DATEDIFF(day,cr.ResDate,cd.Date)>=pr2.DaysTo ORDER BY pr2.DaysTo)
    INNER JOIN Payments pay ON pay.ConfResID=cr.ConfResID
    WHERE p.ParticipantID=@ParticipantID
```

```
END
```

```
GO
```

## MyWorkshops – Sprawdzenie warsztatów, na które zarejestrowany jest dany uczestnik

```
CREATE PROCEDURE MyWorkshops
    @ParticipantID int
AS
BEGIN
    SELECT w.WorkshopName, c.ConferenceName, c.Address,
           c.City, c.PostalCode, cd.Date, w.StartTime, w.EndTime
    FROM Conferences c INNER JOIN ConferenceDays cd ON c.ConferenceID=cd.ConferenceID
    INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID AND cr.Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
    INNER JOIN WorkshopReservations wr ON cdr.RegistrationID=wr.DayRegID AND
           wr.Cancelled=0
    INNER JOIN Workshops w ON wr.WorkshopID=w.WorkshopID
    INNER JOIN WorkshopRegistrations wreg ON wr.WorkResID=wreg.ReservationID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
    INNER JOIN Prices pr ON w.PriceID=pr.PriceID
    INNER JOIN Payments pay ON pay.WorkResID=wr.WorkResID
    WHERE p.ParticipantID=@ParticipantID
END
GO
```

## ConferenceDayList – Wyświetlenie listy uczestników dnia konferencji

```
CREATE PROCEDURE ConferenceDayList
    @DayID int
AS
BEGIN
    SELECT p.ParticipantID, p.LastName, p.FirstName
    FROM ConferenceDays cd INNER JOIN ConferenceReservations cr ON cd.DayID=cr.DayID
    AND cr.Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON cr.ConfResID=cdr.ReservationID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
    WHERE @DayID=cd.DayID
END
GO
```

## WorkshopList – Wyświetlenie listy uczestników warsztatu

```
CREATE PROCEDURE WorkshopList
    @WorkshopID int
AS
BEGIN
    SELECT p.ParticipantID, p.LastName, p.FirstName
    FROM WorkshopReservations wr
    INNER JOIN WorkshopRegistrations wreg ON wr.WorkResID=wreg.ReservationID AND
           wr.Cancelled=0
    INNER JOIN ConfDayRegistrations cdr ON wr.DayRegID=cdr.RegistrationID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
    WHERE @WorkshopID=wr.WorkshopID
END
GO
```

## ClientConfPayments – Wyświetlenie płatności klienta za zarezerwowane dni konferencji

```
CREATE PROCEDURE ClientConfPayments
    @ClientID int
AS
BEGIN
    SELECT c.ConferenceName, cd.Date, cr.NoOfParticipants, cr.NoOfStudents,
        ((cr.NoOfParticipants-cr.NoOfStudents)*(p.Price*(1-p.Discount))
        +cr.NoOfStudents*(p.Price*(1-p.Discount-p.StudentDiscount))) AS ToPay, pay.Paid
    FROM Clients cl INNER JOIN ConferenceReservations cr ON cl.ClientID=cr.ClientID
    INNER JOIN ConferenceDays cd ON cr.DayID=cd.DayID
    INNER JOIN Conferences c ON cd.ConferenceID=c.ConferenceID
    INNER JOIN Prices p ON p.DayID=cd.DayID
    AND p.DaysTo=(SELECT TOP 1 pr.DaysTo FROM Prices pr WHERE pr.DayID=p.DayID AND
        DATEDIFF(day, cr.ResDate, cd.Date)>=pr.DaysTo ORDER BY pr.DaysTo)
    LEFT OUTER JOIN Payments pay ON cr.ConfResID=pay.ConfResID
    WHERE cl.ClientID=@ClientID
END
GO
```

## ChangeConferenceDayPlaces – Zmiana ilości miejsc na dany dzień konferencji

```
CREATE PROCEDURE ChangeConferenceDayPlaces
    @ConferenceDayID int,
    @NewMaxPeople int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM ConferenceDays WHERE @ConferenceDayID=DayID)
    BEGIN
        RAISERROR ('No conference day with given ID', 14, 1)
        RETURN
    END
    IF (@NewMaxPeople<(SELECT SUM(NoOfParticipants) FROM ConferenceReservations cr
        INNER JOIN ConferenceDays cd ON cr.DayID=cd.DayID WHERE
        cd.DayID=@ConferenceDayID))
    BEGIN
        RAISERROR ('Number of reserved places is bigger than new participants
        limit', 14, 1)
        RETURN
    END
    UPDATE ConferenceDays
        SET MaxPeople=@NewMaxPeople
        WHERE DayID=@ConferenceDayID
END
GO
```

## ChangeWorkshopPlaces – Zmiana ilości miejsc na dany warsztat

```
CREATE PROCEDURE ChangeWorkshopPlaces
    @WorkshopID int,
    @NewMaxPeople int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM Workshops WHERE @WorkshopID=WorkshopID)
    BEGIN
        RAISERROR ('No workshop with given ID',14,1)
        RETURN
    END
    IF (@NewMaxPeople<(SELECT COUNT(WorkResID) FROM WorkshopReservations wr
    INNER JOIN Workshops w ON w.WorkshopID=wr.WorkshopID WHERE
    w.WorkshopID=@WorkshopID))
    BEGIN
        RAISERROR ('Number of reserved places is bigger than new participants
        limit',14,1)
        RETURN
    END
    UPDATE Workshops
        SET MaxPeople=@NewMaxPeople WHERE WorkshopID=@WorkshopID
END
GO
```

## ChangeConferenceDayReservation – Zmiana ilości zarezerwowanych miejsc na dany dzień konferencji

```
CREATE PROCEDURE ChangeConferenceDayReservation
    @ConfResID int,
    @NewNoOfParticipants int,
    @NewNoOfStudents int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM ConferenceReservations WHERE ConfResID=@ConfResID)
    BEGIN
        RAISERROR ('No reservation with given ID',14,1)
        RETURN
    END
    IF (@NewNoOfParticipants<(SELECT COUNT(cdr.RegistrationID) FROM
    ConfDayRegistrations cdr INNER JOIN ConferenceReservations cr ON
    cdr.ReservationID=cr.ConfResID WHERE cr.ConfResID=@ConfResID))
    BEGIN
        RAISERROR ('Number of registered participants is bigger than new number of
        reserved places',14,1)
        RETURN
    END
    IF (@NewNoOfStudents<(SELECT COUNT(cdr.RegistrationID) FROM ConfDayRegistrations
    cdr INNER JOIN ConferenceReservations cr ON cdr.ReservationID=cr.ConfResID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID WHERE p.Student=1
    AND cr.ConfResID=@ConfResID))
    BEGIN
        RAISERROR ('Number of registered students is bigger than new number of
        places for students',14,1)
        RETURN
    END
    UPDATE ConferenceReservations
        SET NoOfParticipants=@NewNoOfParticipants
        WHERE ConfResID=@ConfResID
    UPDATE ConferenceReservations
        SET NoOfStudents=@NewNoOfStudents
        WHERE ConfResID=@ConfResID
END
GO
```

## CancelConfDayReservation – Anulowanie rezerwacji na dany dzień konferencji

```
CREATE PROCEDURE CancelConfDayReservation
    @ConfResID int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM ConferenceReservations WHERE ConfResID=@ConfResID)
    BEGIN
        RAISERROR ('No reservation with given ID',14,1)
        RETURN
    END
    UPDATE ConferenceReservations
        SET Cancelled=1
        WHERE ConfResID=@ConfResID
END
GO
```

## CancelWorkshopReservation – Anulowanie rezerwacji na warsztat

```
CREATE PROCEDURE CancelWorkshopReservation
    @WorkResID int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM WorkshopReservations WHERE WorkResID=@WorkResID)
    BEGIN
        RAISERROR ('No reservation with given ID',14,1)
        RETURN
    END
    UPDATE WorkshopReservations
        SET Cancelled=1 WHERE WorkResID=@WorkResID
END
GO
```

## CancelConfDayRegistration – Anulowanie rejestracji na dany dzień konferencji przez uczestnika

```
CREATE PROCEDURE CancelConfDayRegistration
    @RegistrationID int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM ConfDayRegistrations WHERE
        RegistrationID=@RegistrationID)
    BEGIN
        RAISERROR ('No conference day registration with given ID',14,1)
        RETURN
    END
    DELETE FROM WorkshopRegistrations
        WHERE RegistrationID IN (SELECT wreg.RegistrationID FROM
            WorkshopRegistrations wreg INNER JOIN WorkshopReservations wr ON
            wreg.ReservationID=wr.WorkResID INNER JOIN ConfDayRegistrations cdr ON
            wr.DayRegID=cdr.RegistrationID WHERE cdr.RegistrationID=@RegistrationID
        )

    DELETE FROM WorkshopReservations
        WHERE WorkResID IN (SELECT wr.WorkResID FROM WorkshopReservations wr
            INNER JOIN ConfDayRegistrations cdr ON wr.DayRegID=cdr.RegistrationID
            INNER JOIN ConferenceReservations cr ON cdr.RegistrationID=cr.ConfResID
            WHERE cdr.RegistrationID=@RegistrationID
        )
    DELETE FROM ConfDayRegistrations WHERE RegistrationID=@RegistrationID
END
GO
```

**FreeUnregisteredPlaces** – Zmiana miejsc w rezerwacji na dzień konferencji na tyle, ilu jest zarejestrowanych uczestników

```
CREATE PROCEDURE FreeUnregisteredPlaces
    @ConfResID int
AS
BEGIN
    SET NOCOUNT ON;
    IF NOT EXISTS (SELECT * FROM ConferenceReservations WHERE ConfResID=@ConfResID)
    BEGIN
        RAISERROR ('No reservation with given ID',14,1)
        RETURN
    END
    DECLARE @Participants int
    SET @Participants=(SELECT COUNT(RegistrationID) FROM ConfDayRegistrations cdr
    WHERE cdr.ReservationID=@ConfResID)
    DECLARE @Students int
    SET @Students=(SELECT COUNT(p.ParticipantID) FROM ConfDayRegistrations cdr
    INNER JOIN ConferenceReservations cr ON cdr.RegistrationID=cr.ConfResID
    INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
    WHERE p.Student=1 AND cr.ConfResID=@ConfResID)
    EXEC ChangeConferenceDayReservation
        @ConfResID,
        @Participants,
        @Students
END
GO
```

**CancelUnpaidReservations** – Anulowanie wszystkich rezerwacji nieopłaconych w ciągu 7 dni od zarezerwowania

```
CREATE PROCEDURE CancelUnpaidReservations
AS
BEGIN
    SET NOCOUNT ON;
    UPDATE ConferenceReservations
        SET Cancelled=1
        WHERE ConfResID IN (SELECT cr.ConfResID FROM Prices p INNER JOIN
        ConferenceDays cd ON p.DayID=cd.DayID INNER JOIN ConferenceReservations cr
        ON cd.DayID=cr.DayID LEFT OUTER JOIN Payments pay ON
        cr.ConfResID=pay.ConfResID WHERE (pay.PaymentID IS NULL OR
        pay.Paid<((cr.NoOfParticipants-cr.NoOfStudents)*(p.Price*(1-
        p.Discount))+cr.NoOfStudents*(p.Price*(1-p.Discount-p.StudentDiscount))))
        AND DATEDIFF(day,cr.ResDate,GETDATE())>7
    )
END
GO
```

## EditConference – Edytowanie danych konferencji

```
CREATE PROCEDURE EditConference
    @ConferenceID int,
    @ConferenceName nvarchar(60),
    @Address nvarchar(50),
    @City nvarchar(40),
    @PostalCode nvarchar(10),
    @MaxPeople int
AS
BEGIN
    SET NOCOUNT ON;
    IF @ConferenceID IS NULL
    BEGIN
        RAISERROR ('ConferenceID is NULL. Can't find conference',14,1)
        RETURN
    END
    IF @ConferenceName IS NOT NULL
    BEGIN
        UPDATE Conferences
        SET ConferenceName=@ConferenceName
        WHERE ConferenceID=@ConferenceID
    END
    IF @Address IS NOT NULL
    BEGIN
        UPDATE Conferences
        SET Address=@Address
        WHERE ConferenceID=@ConferenceID
    END
    IF @City IS NOT NULL
    BEGIN
        UPDATE Conferences
        SET City=@City
        WHERE ConferenceID=@ConferenceID
    END
    IF @PostalCode IS NOT NULL
    BEGIN
        UPDATE Conferences
        SET PostalCode=@PostalCode
        WHERE ConferenceID=@ConferenceID
    END
    IF @MaxPeople IS NOT NULL
    BEGIN
        UPDATE ConferenceDays
        SET MaxPeople=@MaxPeople
        WHERE DayID IN (SELECT cd.DayID FROM ConferenceDays cd INNER JOIN
            Conferences c ON cd.ConferenceID=c.ConferenceID
            WHERE c.ConferenceID=@ConferenceID)
    END
END
GO
```



## EditClient – Edytowanie danych klienta

```
CREATE PROCEDURE EditClient
    @ClientID int,
    @Company bit,
    @CompanyName nvarchar(40),
    @LastName nvarchar(25),
    @FirstName nvarchar(25),
    @Address nvarchar(50),
    @City nvarchar(40),
    @PostalCode nvarchar(10),
    @Phone nvarchar(15)
AS
BEGIN
    SET NOCOUNT ON;
    IF @ClientID IS NULL
    BEGIN
        RAISERROR ('Client ID is NULL. Can't find client',14,1)
        RETURN
    END
    IF @Company IS NOT NULL
    BEGIN
        UPDATE Clients
        SET Company=@Company WHERE ClientID=@ClientID
    END
    IF @CompanyName IS NOT NULL
    BEGIN
        UPDATE Clients
        SET CompanyName=@CompanyName WHERE ClientID=@ClientID AND Company=1
    END
    IF @LastName IS NOT NULL
    BEGIN
        UPDATE Clients
        SET LastName=@LastName WHERE ClientID=@ClientID
    END
    IF @FirstName IS NOT NULL
    BEGIN
        UPDATE Clients
        SET FirstName=@FirstName WHERE ClientID=@ClientID
    END
    IF @Address IS NOT NULL
    BEGIN
        UPDATE Clients
        SET Address=@Address WHERE ClientID=@ClientID
    END
    IF @City IS NOT NULL
    BEGIN
        UPDATE Clients
        SET City=@City WHERE ClientID=@ClientID
    END
    IF @PostalCode IS NOT NULL
    BEGIN
        UPDATE Clients
        SET PostalCode=@PostalCode WHERE ClientID=@ClientID
    END
    IF @Phone IS NOT NULL
    BEGIN
        UPDATE Clients
        SET Phone=@Phone WHERE ClientID=@ClientID
    END
END
GO
```

## EditParticipant – Edytowanie danych uczestnika

```
CREATE PROCEDURE EditParticipant
    @ParticipantID int,
    @LastName nvarchar(25),
    @Firstname nvarchar(25),
    @Phone nvarchar(15),
    @Student bit,
    @StudentIDNo integer
AS
BEGIN
    SET NOCOUNT ON;
    IF @ParticipantID IS NULL
    BEGIN
        RAISERROR ('Participant ID is NULL. Can't find client',14,1)
        RETURN
    END
    IF @LastName IS NOT NULL
    BEGIN
        UPDATE Participants
        SET LastName=@LastName
        WHERE ParticipantID=@ParticipantID
    END
    IF @FirstName IS NOT NULL
    BEGIN
        UPDATE Participants
        SET LastName=@LastName
        WHERE ParticipantID=@ParticipantID
    END
    IF @Phone IS NOT NULL
    BEGIN
        UPDATE Participants
        SET Phone=@Phone
        WHERE ParticipantID=@ParticipantID
    END
    IF @Student IS NOT NULL
    BEGIN
        UPDATE Participants
        SET Student=@Student
        WHERE ParticipantID=@ParticipantID
    END
    IF @StudentIDNo IS NOT NULL
    BEGIN
        UPDATE Participants
        SET StudentIDNo=@StudentIDNo
        WHERE ParticipantID=@ParticipantID AND Student=1
    END
END
GO
```

## 7. Funkcje

**CalculatePayment** – Zwraca obliczoną wartość, którą należy zapłacić za podaną rezerwację warsztatu lub konferencji (argument @Conference 0 lub 1)

```
CREATE FUNCTION CalculatePayment(  
    @ReservationID int,  
    @Conference int  
)  
    RETURNS numeric(4,2)  
  
AS  
BEGIN  
    DECLARE @Result numeric(4,2)  
    IF @Conference=1  
    BEGIN  
        SET @Result=(SELECT((cr.NoOfParticipants-cr.NoOfStudents)*(p.Price*(1-  
p.Discount))+cr.NoOfStudents*(p.Price*(1-p.Discount-p.StudentDiscount)))  
FROM ConferenceReservations cr INNER JOIN ConferenceDays cd ON  
cr.DayID=cd.DayID AND cr.ConfResID=@ReservationID  
INNER JOIN Prices p ON p.DayID=cd.DayID WHERE cr.ConfResID=@ReservationID  
AND p.DaysTo=(SELECT TOP 1 pr.DaysTo FROM Prices pr WHERE pr.DayID=p.DayID  
AND DATEDIFF(day,cr.ResDate,cd.Date)>=pr.DaysTo ORDER BY pr.DaysTo)  
)  
    END  
    IF @Conference=0  
    BEGIN  
        IF EXISTS (SELECT * FROM WorkshopReservations wr INNER JOIN Workshops w ON  
wr.WorkshopID=w.WorkshopID  
INNER JOIN Prices p ON w.PriceID=p.PriceID WHERE wr.WorkResID=@ReservationID)  
        BEGIN  
            IF ((SELECT p.Student FROM Participants p INNER JOIN  
ConfDayRegistrations cdr ON p.ParticipantID=cdr.ParticipantID  
INNER JOIN WorkshopReservations wr ON cdr.RegistrationID=wr.DayRegID  
WHERE wr.WorkResID=@ReservationID)=1)  
            BEGIN  
                SET @Result=(SELECT p.Price*(1-p.Discount-p.StudentDiscount)  
FROM Prices p INNER JOIN Workshops w ON p.PriceID=w.PriceID  
INNER JOIN WorkshopReservations wr ON  
w.WorkshopID=wr.WorkshopID)  
            END  
        ELSE  
        BEGIN  
            SET @Result=(SELECT p.Price*(1-p.Discount) FROM Prices p INNER  
JOIN Workshops w ON p.PriceID=w.PriceID INNER JOIN  
WorkshopReservations wr ON w.WorkshopID=wr.WorkshopID)  
        END  
    END  
    RETURN @Result  
END  
GO
```

### ConfDayAvailablePlaces – Zwraca ilość wolnych miejsc na podany dzień konferencji

```
CREATE FUNCTION ConfDayAvailablePlaces (
    @DayID int
)
RETURNS int
AS
BEGIN
    DECLARE @Result int
    SET @Result=(SELECT MaxPeople FROM ConferenceDays WHERE DayID=@DayID) -
        (SELECT SUM(NoOfParticipants) FROM ConferenceReservations WHERE
            DayID=@DayID AND Cancelled=0)
    RETURN @Result
END
GO
```

### WorkshopAvailablePlaces – Zwraca ilość wolnych miejsc na podany warsztat

```
CREATE FUNCTION WorkshopAvailablePlaces (
    @WorkshopID int
)
RETURNS int
AS
BEGIN
    DECLARE @Result int
    SET @Result=(SELECT MaxPeople FROM Workshops WHERE WorkshopID=@WorkshopID) -
        (SELECT COUNT(*) FROM WorkshopReservations WHERE
            WorkshopID=@WorkshopID AND Cancelled=0)
    RETURN @Result
END
GO
```

## 8. Triggery

**ClearTablesAfterCancellingConfRes** – Usuwa dane z tabel powiązanych z rezerwacją konferencji, która została anulowana (rejestracje na konferencję, rezerwacje na warsztaty, rejestracje na warsztaty)

```
CREATE TRIGGER ClearTablesAfterCancellingConfRes
ON ConferenceReservations
AFTER UPDATE
AS
BEGIN
    DELETE FROM WorkshopRegistrations
    WHERE RegistrationID IN (SELECT wreg.RegistrationID FROM
        WorkshopRegistrations wreg INNER JOIN WorkshopReservations wr ON
        wreg.ReservationID=wr.WorkResID INNER JOIN ConfDayRegistrations cdr ON
        wr.DayRegID=cdr.RegistrationID INNER JOIN ConferenceReservations cr ON
        cdr.RegistrationID=cr.ConfResID WHERE cr.Cancelled=1
    )

    DELETE FROM WorkshopReservations
    WHERE WorkResID IN (SELECT wr.WorkResID FROM WorkshopReservations wr
        INNER JOIN ConfDayRegistrations cdr ON wr.DayRegID=cdr.RegistrationID
        INNER JOIN ConferenceReservations cr ON cdr.RegistrationID=cr.ConfResID
        WHERE cr.Cancelled=1
    )

    DELETE FROM ConfDayRegistrations
    WHERE RegistrationID IN (SELECT cdr.RegistrationID FROM
        ConfDayRegistrations cdr INNER JOIN ConferenceReservations cr ON
        cdr.RegistrationID=cr.ConfResID WHERE cr.Cancelled=1
    )
END
GO
```

**DeleteRegistrationAfterCancellingWorkRes** – Usuwa rejestrację powiązaną z rezerwacją na warsztat, która została anulowana

```
CREATE TRIGGER DeleteRegistrationAfterCancellingWorkRes
ON WorkshopReservations
AFTER UPDATE
AS
BEGIN
    DELETE FROM WorkshopRegistrations
    WHERE RegistrationID IN (SELECT wreg.RegistrationID FROM
        WorkshopRegistrations wreg INNER JOIN WorkshopReservations wr ON
        wreg.ReservationID=wr.WorkResID WHERE wr.Cancelled=1
    )
END
GO
```

**CheckWorkshopReservations** – Sprawdza spójność danych po wprowadzeniu rezerwacji na warsztat (czy uczestnik nie zapisał się na dwa warsztaty odbywające się w tym samym czasie oraz czy nie zapisał się drugiego raz na ten sam warsztat)

```
CREATE TRIGGER CheckWorkshopReservations
ON WorkshopReservations
AFTER INSERT
AS
BEGIN
    IF EXISTS
        (SELECT * FROM Inserted iwr INNER JOIN Workshops iw ON
            iwr.WorkshopID=iw.WorkshopID
            INNER JOIN ConfDayRegistrations icdr ON iwr.DayRegID=icdr.RegistrationID
            INNER JOIN Participants ip ON icdr.ParticipantID=ip.ParticipantID
            WHERE iwr.WorkResID IN(SELECT wr.WorkResID FROM WorkshopReservations wr
            INNER JOIN Workshops w ON wr.WorkshopID=w.WorkshopID
            INNER JOIN ConfDayRegistrations cdr ON iwr.DayRegID=cdr.RegistrationID
            INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
            WHERE w.WorkshopID<>iw.WorkshopID AND ip.ParticipantID=p.ParticipantID
            AND ((iw.StartTime BETWEEN w.StartTime AND w.EndTime) OR (iw.StartTime
            BETWEEN w.StartTime AND w.EndTime)))
        )
    BEGIN
        RAISERROR ('Can't make a reservation for two workshops in the same
            time',14,1)
        ROLLBACK TRANSACTION
    END
    IF EXISTS
        (SELECT COUNT(wr.WorkResID) FROM WorkshopReservations wr INNER JOIN
            ConfDayRegistrations cdr ON wr.DayRegID=cdr.RegistrationID
            INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
            GROUP BY wr.WorkshopID, p.ParticipantID
            HAVING COUNT(wr.WorkResID)>1
        )
    BEGIN
        RAISERROR ('Can't make two reservations for the same workshop',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

**CheckConfDayRegistrations** – Sprawdza spójność danych po rejestracji na konferencję (czy uczestnik nie rejestrował się dwa razy w ramach tej samej rezerwacji lub czy nie zarejestrował się na dwie konferencje odbywające się w ten sam dzień)

```
CREATE TRIGGER CheckConfDayRegistrations
ON ConfDayRegistrations
AFTER INSERT
AS
BEGIN
    IF EXISTS
        (SELECT * FROM Inserted icdr INNER JOIN ConferenceReservations icr ON
        cdr.ReservationID=icr.ConfResID
        INNER JOIN ConferenceDays icd ON icr.DayID=icd.DayID
        INNER JOIN Participants ip ON icdr.ParticipantID=ip.ParticipantID
        WHERE icdr.RegistrationID IN
        (SELECT cdr.RegistrationID FROM ConfDayRegistrations cdr INNER JOIN
        ConferenceReservations cr ON cdr.ReservationID=cr.ConfResID
        INNER JOIN ConferenceDays cd ON cr.DayID=cd.DayID
        INNER JOIN Participants p ON cdr.ParticipantID=p.ParticipantID
        WHERE cr.ConfResID<>icr.ConfResID AND ip.ParticipantID=p.ParticipantID AND
        icd.Date=cd.Date)
        )
    BEGIN
        RAISERROR ('Can''t register to two conferences on the same day',14,1)
        ROLLBACK TRANSACTION
    END
    IF EXISTS
        (SELECT COUNT(*) FROM Participants p INNER JOIN ConfDayRegistrations cdr ON
        cdr.ParticipantID=p.ParticipantID
        GROUP BY cdr.ReservationID,p.ParticipantID
        HAVING COUNT (p.ParticipantID)>1
        )
    BEGIN
        RAISERROR ('Can''t register twice on the same Reservation ID',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

**CheckConfDayMaxPeople** – Sprawdza czy po dokonaniu rezerwacji nie zostanie przekroczony limit miejsc na dany dzień konferencji

```
CREATE TRIGGER CheckConfDayMaxPeople
ON ConferenceReservations
AFTER INSERT
AS
BEGIN
    IF EXISTS
        (SELECT SUM(cr.NoOfParticipants) FROM ConferenceReservations cr INNER JOIN
        ConferenceDays cd
        ON cr.DayID=cd.DayID
        WHERE cr.Cancelled=0
        GROUP BY cd.DayID
        HAVING SUM(cr.NoOfParticipants)>(SELECT cd2.MaxPeople FROM
        ConferenceDays cd2 WHERE cd2.DayID=cd.DayID)
        )
    BEGIN
        RAISERROR ('Not enough places on this day',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

**CheckWorkshopMaxPeople** – Sprawdza czy po dokonaniu rezerwacji nie zostanie przekroczony limit miejsc na dany warsztat

```
CREATE TRIGGER CheckWorkshopMaxPeople
ON WorkshopReservations
AFTER INSERT
AS
BEGIN
    IF EXISTS
        (SELECT COUNT(WorkResID) FROM WorkshopReservations wr INNER JOIN
        Workshops w ON wr.WorkshopID=w.WorkshopID WHERE wr.Cancelled=0
        GROUP BY w.WorkshopID
        HAVING COUNT(WorkResID)>(SELECT w2.MaxPeople FROM Workshops w2 WHERE
        w.WorkshopID=w2.WorkshopID)
        )
    BEGIN
        RAISERROR ('Not enough places on this workshop',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

**CheckWorkshopPriceNotDayPrice** – Sprawdza czy klucz obcy w tabeli warsztatów nie odwołuje się do ceny za dzień konferencji (ceny za warsztat nie mają DayID)

```
CREATE TRIGGER CheckWorkshopPriceNotDayPrice
ON Workshops
AFTER INSERT,UPDATE
AS
BEGIN
    IF EXISTS (SELECT w.WorkshopID FROM Workshops w INNER JOIN Prices
        ON w.PriceID=p.PriceID AND p.DayID IS NOT NULL)
    BEGIN
        RAISERROR ('Workshop price must have ID different than day price',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

**CheckNoOfRegisteredParticipants** – Sprawdza czy po zarejestrowaniu kolejnego uczestnika w ramach jednej rezerwacji nie zostanie przekroczona ilość zarezerwowanych miejsc

```
CREATE TRIGGER CheckNoOfRegisteredParticipants
ON ConfDayRegistrations
AFTER INSERT
AS
BEGIN
    IF EXISTS(SELECT * FROM Inserted icdr INNER JOIN ConferenceReservations icr ON
        icdr.RegistrationID=icr.ConfResID WHERE icr.ConfResID IN (SELECT
        cr.ConfResID FROM ConfDayRegistrations cdr INNER JOIN
        ConferenceReservations cr ON cdr.ReservationID=cr.ConfResID
        WHERE (SELECT COUNT (cdr2.RegistrationID) FROM ConfDayRegistrations cdr2
        WHERE cdr2.ReservationID=cr.ConfResID)>cr.NoOfParticipants)
        )
    BEGIN
        RAISERROR ('No more places available for this reservation',14,1)
        ROLLBACK TRANSACTION
    END
END
GO
```

## 9. Wygenerowane dane

Dane zostały wygenerowane za pomocą Generatora RedGate. Jednak przy tak złożonej bazie danych nie zapewnia on całkowitego spełniania warunków integralności, dlatego też dla polepszenia jakości danych testowych usunięto rekordy łamiące niektóre warunki. Po tych czynnościach w bazie pozostały następujące ilości rekordów:

Clients: 2000

Conferences: 80

ConferenceDays: 300

ConferenceReservations: 3897

ConfDayRegistrations: 7056

Participants: 9500

Payments: 5000

Prices: 1850

WorkshopReservations: 3250

WorkshopRegistrations: 2250

Workshops: 1500

## 10. Określenie uprawnień do danych

**Administrator** posiada dostęp do wszystkich tabel, procedur, funkcji, widoków.

**Pracownik firmy organizującej konferencje** posiada dostęp do tabel. Ponadto dla niego dostępne są:

### Widoki:

- MostPopularConferences
- MostPopularWorkshops
- AvailableDays
- AvailableWorkshops
- UnpaidConferenceReservations
- UnpaidWorkshopReservations
- ClientsHistory
- BestClients
- CancelledConferenceReservations
- CancelledWorkshopReservations
- ConferenceDaysReservedButNotRegistered
- UpcomingConfDaysPrices
- OverpaidConferences
- OverpaidWorkshops
- CurrentReservationsRegisteredParticipants



**Procedury:**

- AddConferenceDay
- AddConference
- AddPrice
- AddWorkshop
- GenerateIdentifiers
- ConferenceDayList
- WorkshopList
- ClientConfPayments
- ChangeConferenceDayPlaces
- ChangeWorkshopPlaces
- CancelConfDayReservation
- CancelWorkshopReservation
- FreeUnregisteredPlaces
- CancelUnpaidReservations
- EditConference

**Klient** dostępne ma:

**Widoki:**

- MostPopularConferences
- MostPopularWorkshops
- AvailableDays
- AvailableWorkshops
- UpcomingConfDaysPrices

**Procedury:**

- AddClient
- AddParticipant
- MakeConfDayReservation
- MakeConferenceReservation
- MakeWorkshopReservation
- RegisterToConferenceDay
- RegisterToWorkshop
- MakeConfResPayment
- MakeWorkResPayment
- PayForWholeReservation
- MyConferences
- MyWorkshops
- ChangeConferenceDayReservation
- CancelConfDayReservation
- CancelWorkshopReservation
- CancelConfDayRegistration
- EditClient
- EditParticipant

**Funkcje:**

- CalculatePayment
- ConfDayAvailablePlaces
- WorkshopAvailablePlaces