CSCI-351 Data communication and Networks


Lecture 3: Internet Architecture (Big picture of how Internet works)

Recap

Okay, what are we going to study?

Application
Transport
Network
Data Link
Physical

Okay, what are we going to study?

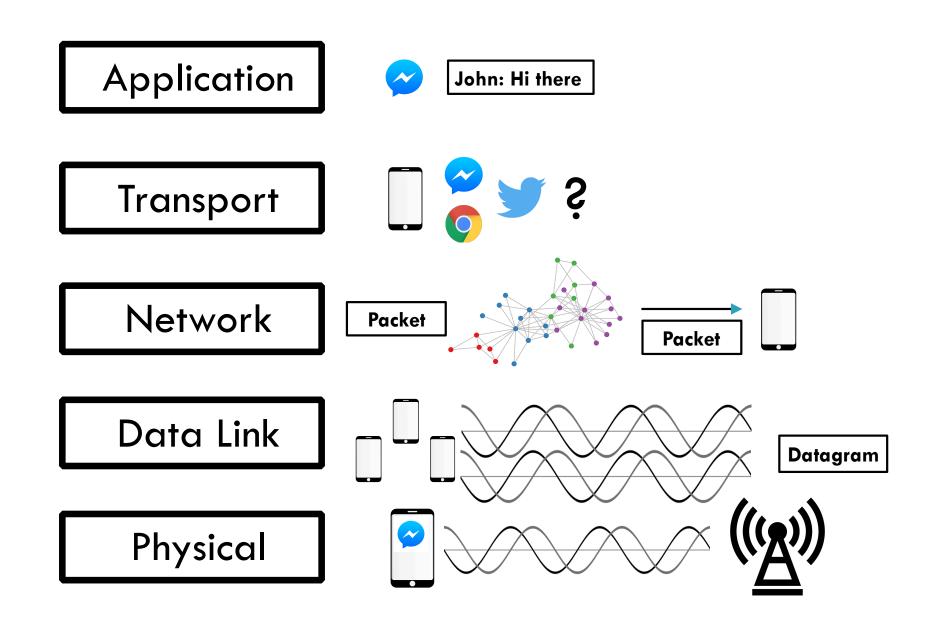

CSCI-351 Data communication and Networks


Lecture 3: Internet Architecture (Big picture of how Internet works)

Organizing Network Functionality


- Networks are built from many components
 - Networking technologies
 - Ethernet, Wifi, Bluetooth, Fiber Optic, Cable Modem, DSL
 - Network styles
 - Circuit switch, packet switch
 - Wired, Wireless, Optical, Satellite
 - Applications
 - Email, Web (HTTP), FTP, BitTorrent, VolP
- How do we make all this stuff work together?!

Problem Scenario


Web **Email Bittorrent** VolP This is a nightmake d new appy or media Huge amounts of y Limits growth and adoption **Ethernet** 802.11 **Bluetooth** Cellular

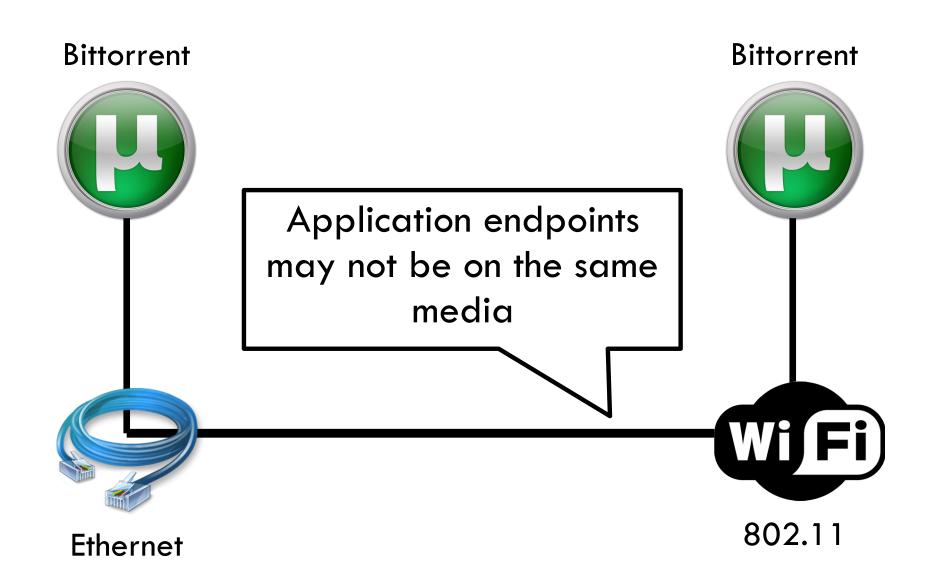

Solution:

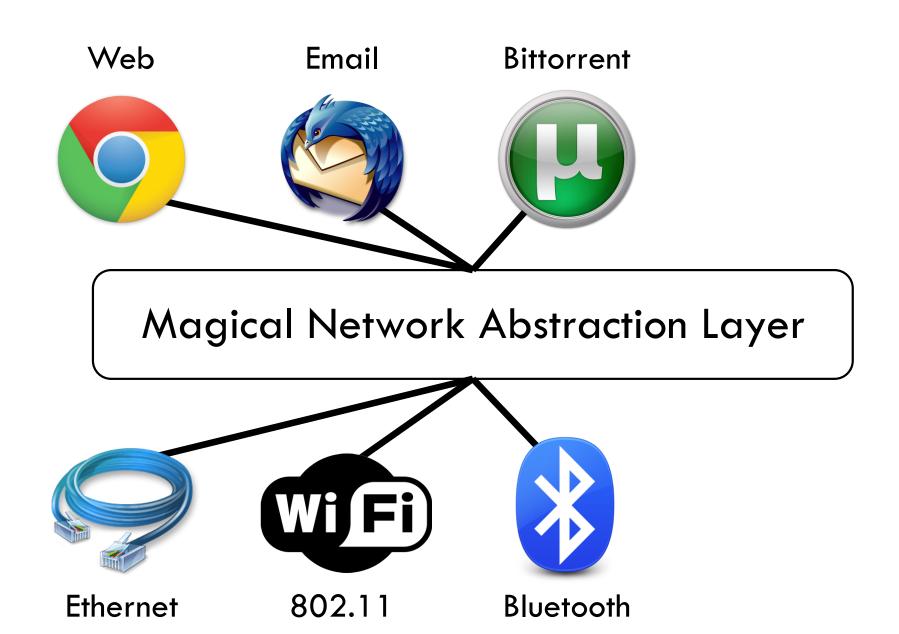

Solution: Use Indirection

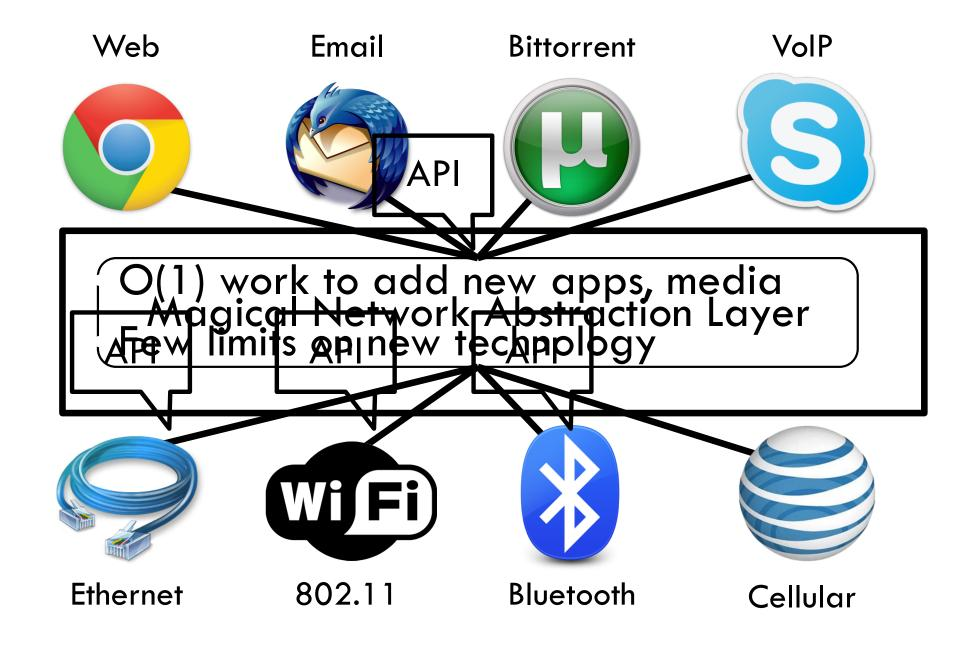

Layered Network Stack


Applications Layer N Layer 2 Layer 1 **Physical** Media

- Modularity
 - Does not specify an implementation
 - Instead, tells us how to organize functionality
- Encapsulation
 - Interfaces define cross-layer interaction
 - Layers only rely on those below them
- Flexibility
 - Reuse of code across the network
 - Module implementations may change
- Unfortunately, there are tradeoffs
 - Interfaces hide information
 - As we will see, may hurt performance...

Key Questions

- How do we divide functionality into layers?
 - Routing
 - Congestion control
 - Error checking

- Security
- Fairness
- And many more...
- How do we distribute functionality across devices?
 - Example: who is responsible for sanity check?

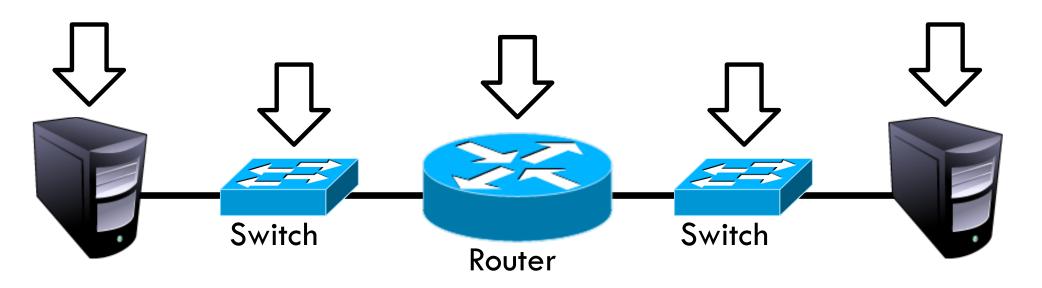

13 Outline

- Layering
 - The OSI Model
- Communicating
 - The End-to-End Argument

The ISO OSI Model

14

OSI: Open Systems Interconnect Model

Application

Presentation

Host 1

Session

Transport

Network

Data Link

Physical

Router

Application

Presentation

Session

Transport

Network

Data Link

Physical

Host 2

Application

Presentation

Session

Transport

Network


Data Link

Physical

The ISO OSI Model

15

OSI: Open Systems Interconnect Model

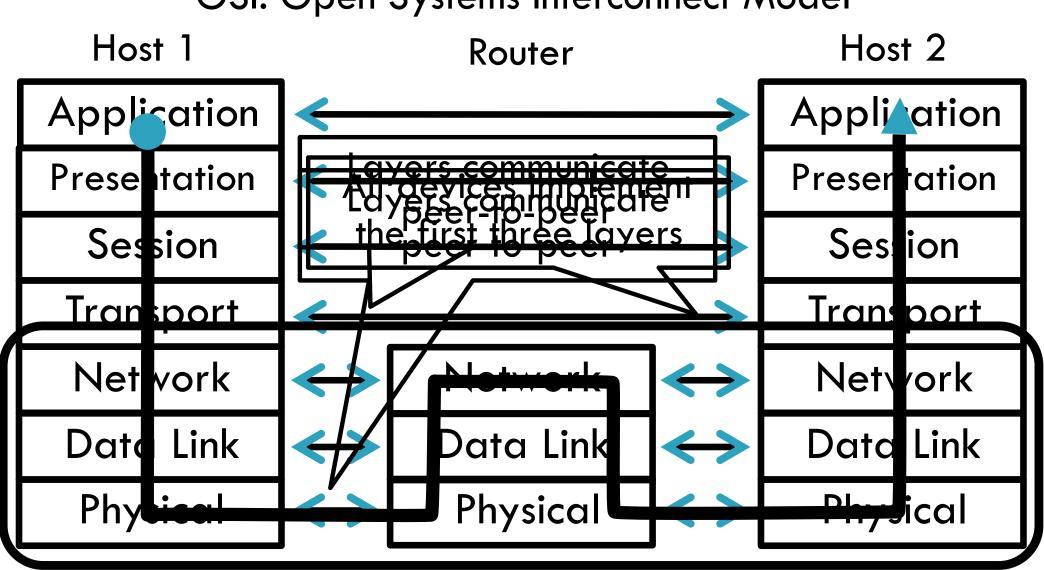

- Service
 - What does this layer do?
- Interface
 - How do you access this layer?
- Protocol
 - How is this layer implemented?

Application

Presentation

Session

Transport

Network

Data Link

Physical

- Service
 - Move information between two systems connected by a physical link
- Interface
 - Specifies how to send one bit
- Protocol
 - Encoding scheme for one bit
 - Voltage levels
 - Timing of signals
- Examples: coaxial cable, fiber optics, radio frequency transmitters

- Service
 - Data framing: boundaries between packets
 - Media access control (MAC)
 - Per-hop reliability and flow-control
- Interface
 - Send one packet between two hosts connected to the same media
- Protocol
 - Physical addressing (e.g. MAC address)
- Examples: Ethernet, Wifi

- Service
 - Deliver packets across the network
 - Handle fragmentation/reassembly
 - Packet scheduling
 - Buffer management
- Interface
 - Send one packet to a specific destination
- Protocol
 - Define globally unique addresses
 - Maintain routing tables
- Example: Internet Protocol (IP), IPv6

Transport Layer

20

- Service
 - Multiplexing/demultiplexing
 - Congestion control
 - Reliable, in-order delivery
- Interface
 - Send message to a destination
- Protocol
 - Port numbers
 - Reliability/error correction
 - Flow-control information
- Examples: UDP, TCP

Application

Presentation

Session

Transport

Network

Data Link

Physical

- Service
 - Access management
 - Synchronization
- Interface
 - It depends...
- Protocol
 - Token management
 - Insert checkpoints
- Examples: none

- Service
 - Convert data between different representations
 - E.g. big endian to little endian
 - □ E.g. Ascii to Unicode
- Interface
 - □ It depends...
- Protocol
 - Define data formats
 - Apply transformation rules
- Examples: none

Application Presentation

Session

Transport

Network


Data Link

Physical

- Service
 - Whatever you want :)
- Interface
 - Whatever you want :D
- Protocol
 - Whatever you want ;)
- Examples: turn on your smartphone and look at the list of apps

24

How does data move through the layers?

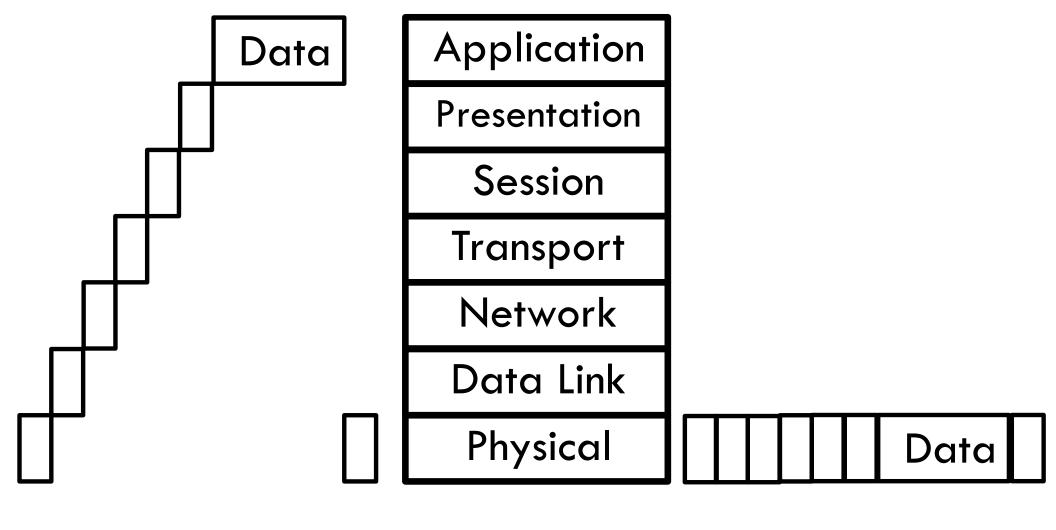



Real Life Analogy

Real Life Analogy Doesn't know how the Postal network works 26 Label contains Un-packing routing info Doesn't know contents of letter


Postal Service

Network Stack in Practice

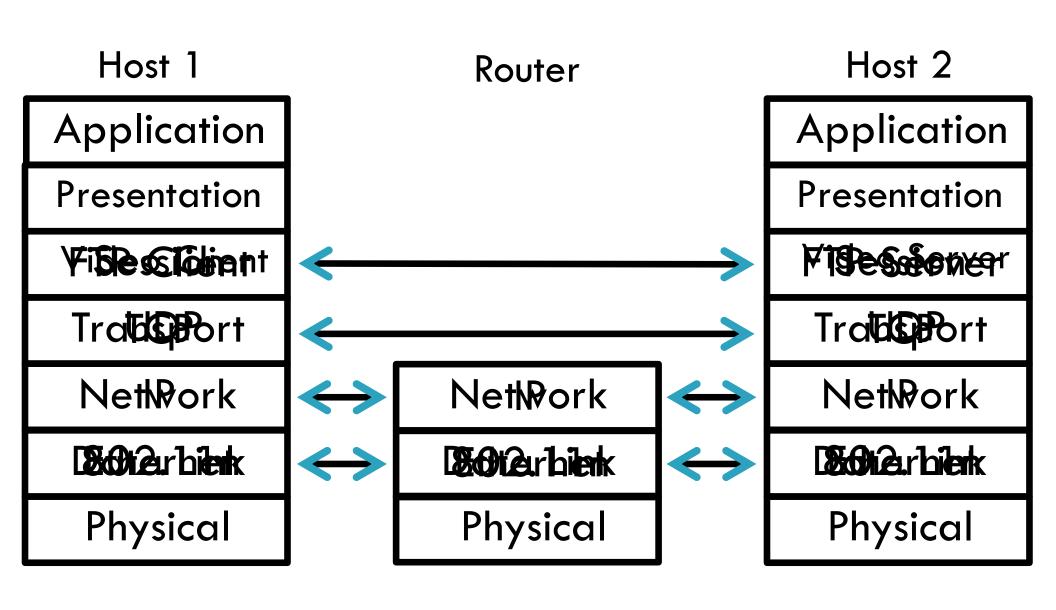


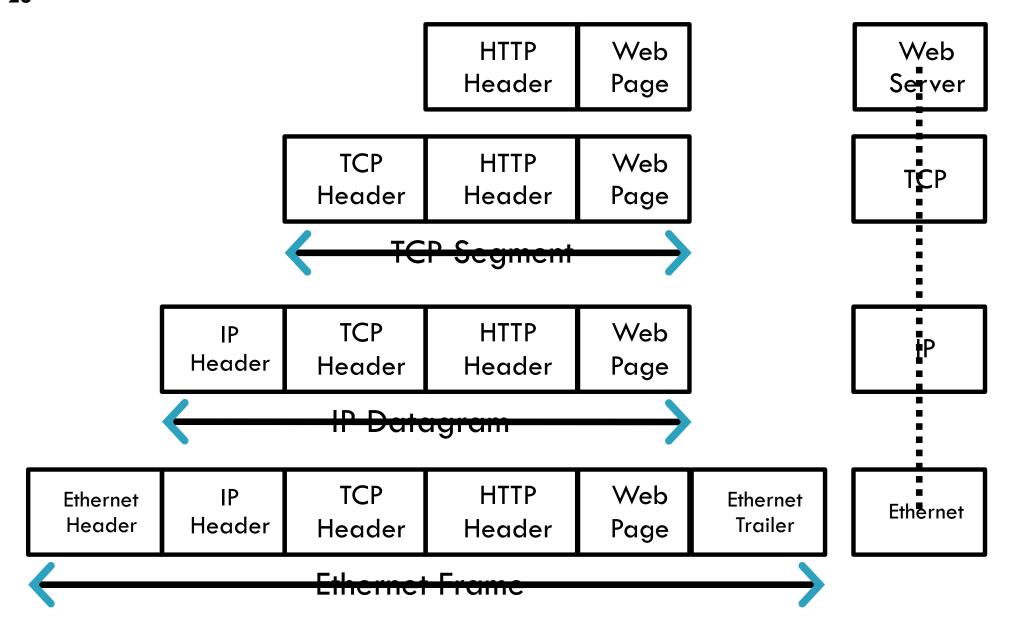


The Hourglass

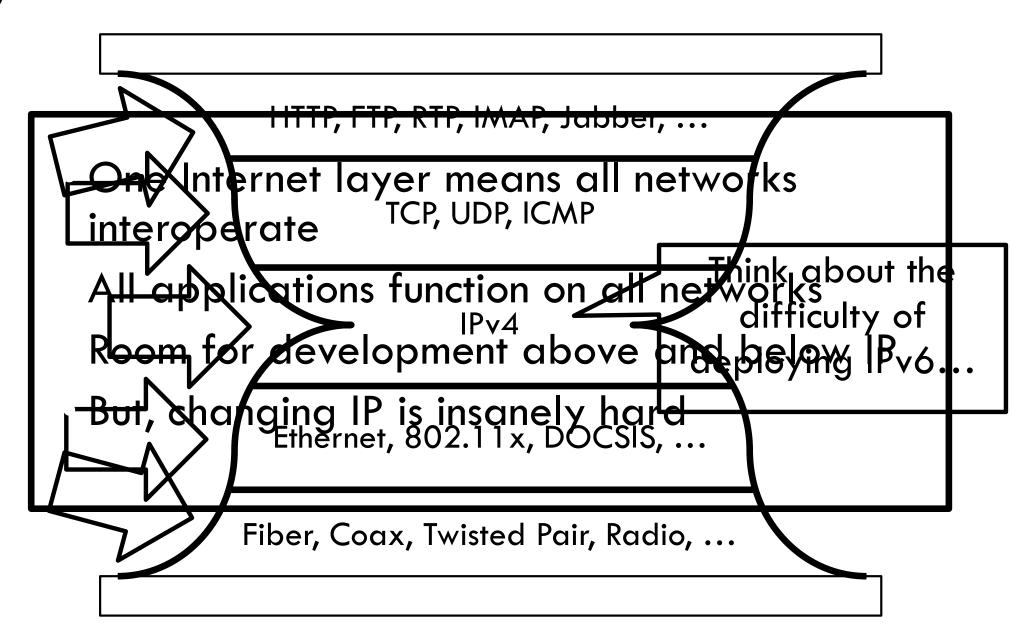

An Example of the New Architectures Named Data Networking (NDN)

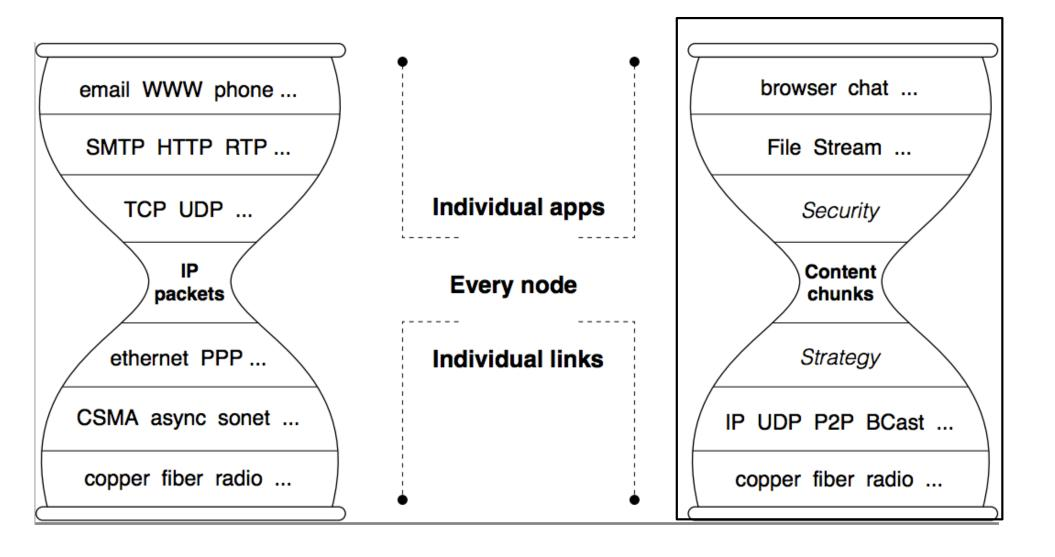


Control plane: How Internet paths are established

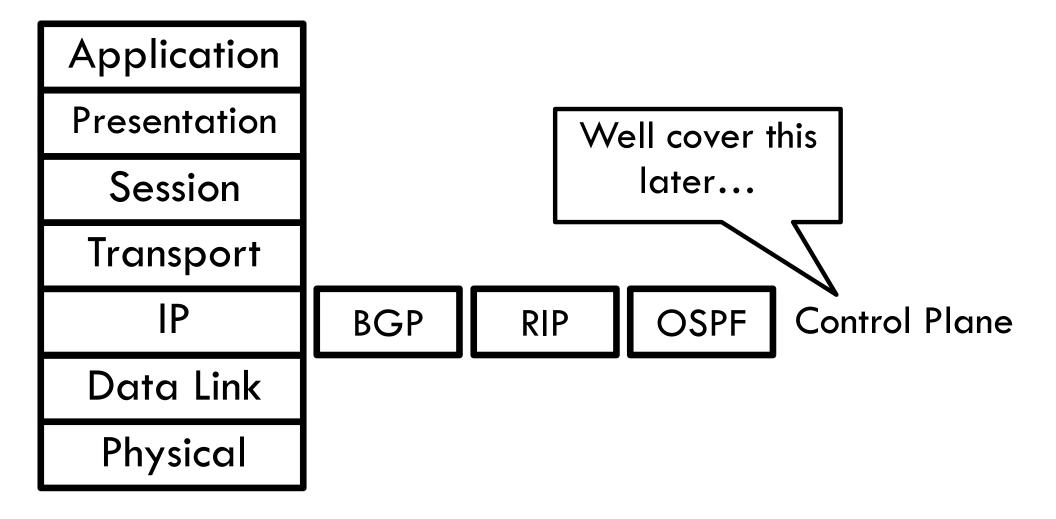

Orthogonal Planes

32

Data plane: How data is forwarded over Internet paths

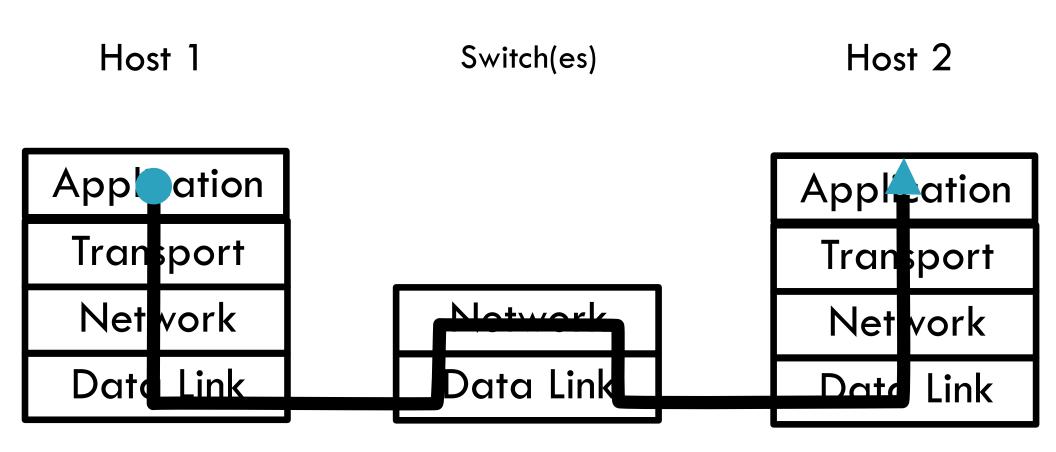

Reality Check

33

- The layered abstraction is very nice
- Does it hold in reality?

No. (Any examples?)



Firewalls

Analyze application layer headers



Transparent Proxies

Simulate application endpoints within the network



NATs

Break end-to-end network reachability

34 Outline


- Layering
 - The OSI Model
- Communicating
 - The End-to-End Argument

From Layers to Eating Cake

- IP gives us best-effort datagram forwarding
 - So simple anyone can do it
 - Large part of why the Internet has succeeded
 - ...but it sure isn't giving us much
- Layers give us a way to compose functionality
 - Example: HTTP over TCP for Web browsers with reliable connections
- ...but they do not tell us where (in the network) to implement the functionality

Where to Place Functionality

- How do we distribute functionality across devices?
 - Example: who is responsible for security?

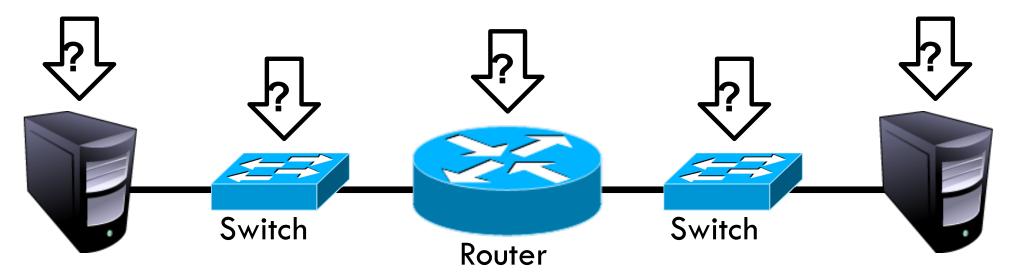


- "The End-to-End Arguments in System Design"
 - Saltzer, Reed, and Clark
 - The Sacred Text of the Internet
 - Endlessly debated by researchers and engineers

Basic Observation

37

- Some applications have end-to-end requirements
 - Security, reliability, etc.
- Implementing this stuff inside the network is hard
 - Every step along the way must be fail-proof
 - Different applications have different needs
- End hosts...
 - Can't depend on the network
 - Can satisfy these requirements without network level support

Example: Reliable File Transfer

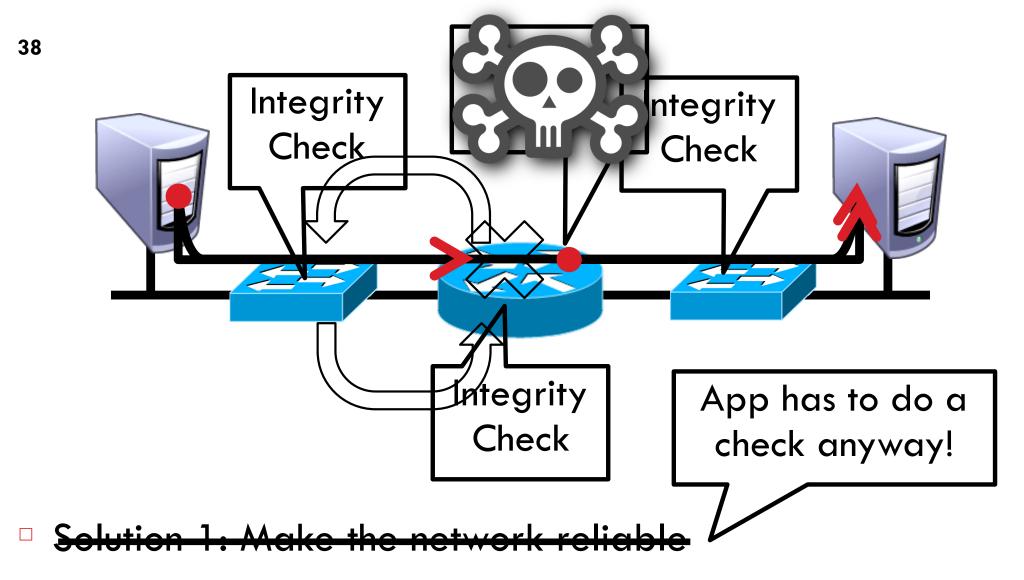

Solution 2: App level, end-to-end check, retry on failure

Example: Reliable File Transfer

39 Please Retry In-network implementation... oesn't reduce host complexity Increased overhead for apps that don't need **functionality** But, in-network performative frametionelibre frametion built at App level

- Solution 1: Make the network reliable
- Solution 2: App level, end-to-end check, retry on failure

Conservative Interpretation

40

"Don't implement a function at the lower levels of the system unless it can be completely implemented at this level" (Peterson and Davie)

Basically, unless you can completely remove the burden from end hosts, don't bother

Radical Interpretation

41

 Don't implement anything in the network that can be implemented correctly by the hosts

Make network layer absolutely minimal

Ignore performance issues

Moderate Interpretation

42

Think twice before implementing functionality in the network

- If hosts can implement functionality correctly, implement it a lower layer only as a performance enhancement
- But do so only if it does not impose burden on applications that do not require that functionality...
- ...and if it doesn't cost too much \$ to implement

Reality Check, Again

43

Layering and E2E principals regularly violated








- Conflicting interests
 - Architectural purity
 - Commercial necessity

Real world example (DNS Hijacking)

44

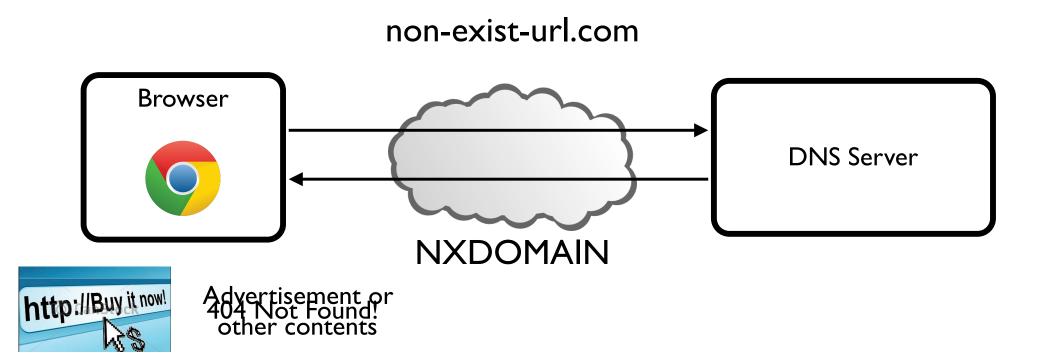

Real world example (DNS Hijacking)

Country	ISP	DNS Servers	Exit Nodes
Argentina	Telefonica de Argentina	14	276
Australia	Dodo Australia	21	1,404
Brazil	Oi Fixo	21	2,558
	СТВС	4	290
Germany	Deutsche Telekom	8	1,385
	Airtel Broadband	9	735
India	BSNL	2	71
	Ntl. Int. Backbone	8	245
Malyasia	TMNet	8	1,676
Spain	Ono	2	71
U.K.	BT Internet	6	479
	Talk Talk	46	3,738
U.S.	AT&T	37	561
	Cable One	4	108
	Cox Communications	63	1,789
	Mediacom Cable	6	219
	Suddenlink	9	98
	Verizon	98	2,102
	WideOpen West	1	39

verizon^v Shop My Verizon Support Watch Fios

Verizon Forums /

46

Products and Services / Fios Internet / Why is Verizon forcing me to use Yahoo Search? You have no right.

Why is Verizon forcing me to use Yahoo Search? You have no right.

Forums Sign In

Search the Verizon Fios Community

Why is Verizon forcing me to use Yahoo Search? You have no right. ✓ SOLVED



◆ Go to solution

O All forum topics < Previous Topic Next Topic >

☑ Reply

Topic Options ✓



TwoTankAmin COPPER CONTRIBUTOR



Registered: 12-21-2011

Why is Verizon forcing me to use Yahoo Search? You have no right.

03-04-2013 02:28 PM

Message 1 of 9 (7,044 Views)

For the past 14+ months as a Verizon triple play customer if I mistyped a URL into the addy bar of my Firefox browser (I take IE off my system and will not use it), I

would and up an the Coarle search site as a halpful place. Lankings Coarle for

How-To Videos

The following videos were produced by users like you!



Videos are subject to the Verizon Fios Community Terms of Service and User Guidelines and contains content that is not created by Verizon.

Takeaways

47

- Layering for network functions
 - Helps manage diversity in computer networks
 - Not optimal for everything, but simple and flexible
- Narrow waist ensures interoperability, enables innovation
- E2E argument (attempts) to keep IP layer simple
- Think carefully when adding functionality into the network

Questions?

Next Class..

49

C-Socket Programming

Г