


Assignment - REST API


Creating db.json file

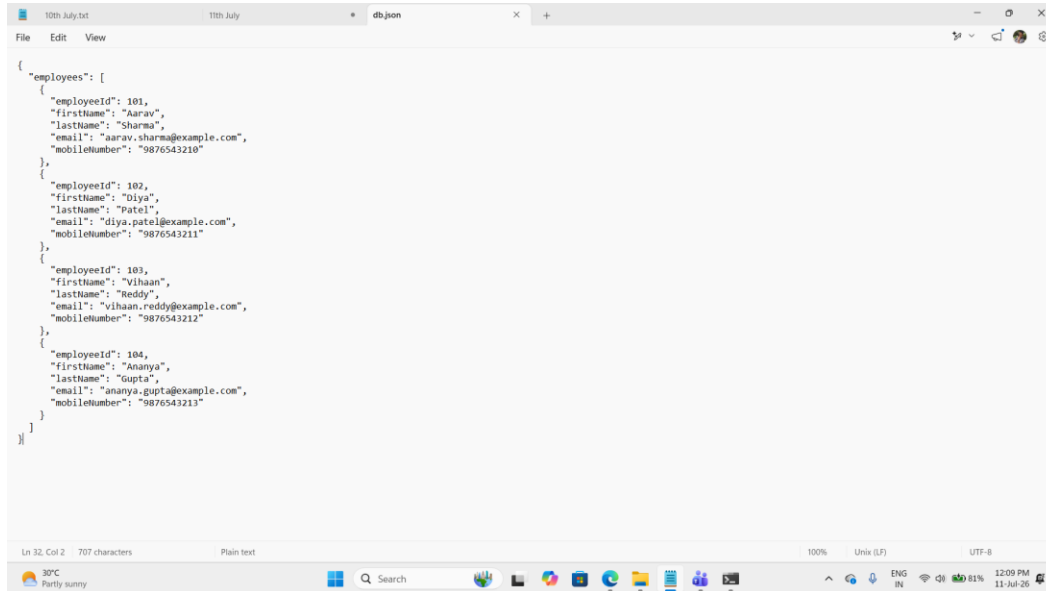

A screenshot of a code editor window with a tab labeled 'db.json'. The editor contains a JSON array of employee objects. The status bar at the bottom indicates 'Ln 32, Col 2, 707 characters' and 'Plain text'.

```
{
  "employees": [
    {
      "employeeId": 101,
      "firstName": "Aarav",
      "lastName": "Sharma",
      "email": "aarav.sharma@example.com",
      "mobileNumber": "9876543210"
    },
    {
      "employeeId": 102,
      "firstName": "Diya",
      "lastName": "Patel",
      "email": "diya.patel@example.com",
      "mobileNumber": "9876543211"
    },
    {
      "employeeId": 103,
      "firstName": "Vihaan",
      "lastName": "Reddy",
      "email": "vihaan.reddy@example.com",
      "mobileNumber": "9876543212"
    },
    {
      "employeeId": 104,
      "firstName": "Ananya",
      "lastName": "Gupta",
      "email": "ananya.gupta@example.com",
      "mobileNumber": "9876543213"
    }
  ]
}
```

Configuring fake Rest API using JSON server

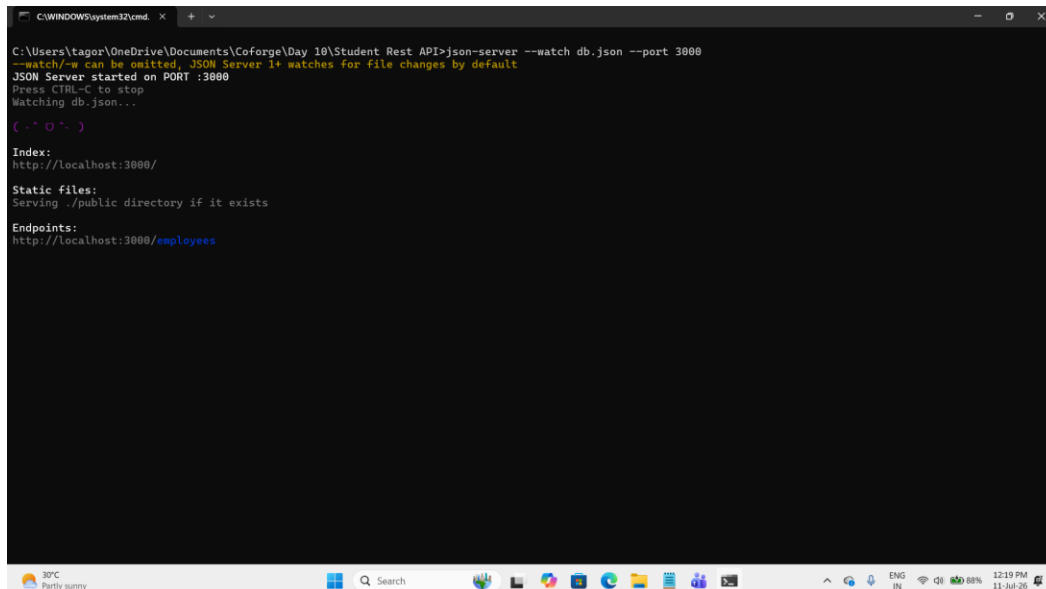

A screenshot of a Windows Command Prompt terminal window. It shows the command to start a JSON server and the subsequent output messages.


```
C:\Users\tagor\OneDrive\Documents\Coforge\Day 10\Student Rest API>json-server --watch db.json --port 3000
--watch/-w can be omitted, JSON Server 1+ watches for file changes by default
JSON Server started on PORT :3000
Press CTRL-C to stop
Watching db.json...
(. ^ . ^ .)

Index:
http://localhost:3000/


Static files:
Serving ./public directory if it exists

Endpoints:
http://localhost:3000/employees
```


View all employees using GET.

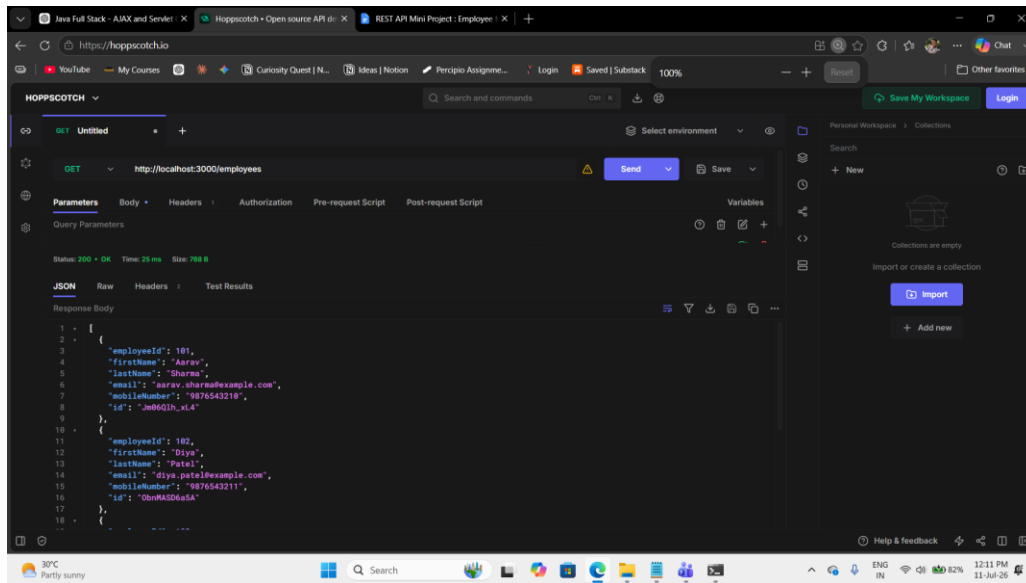


Add new employees using POST

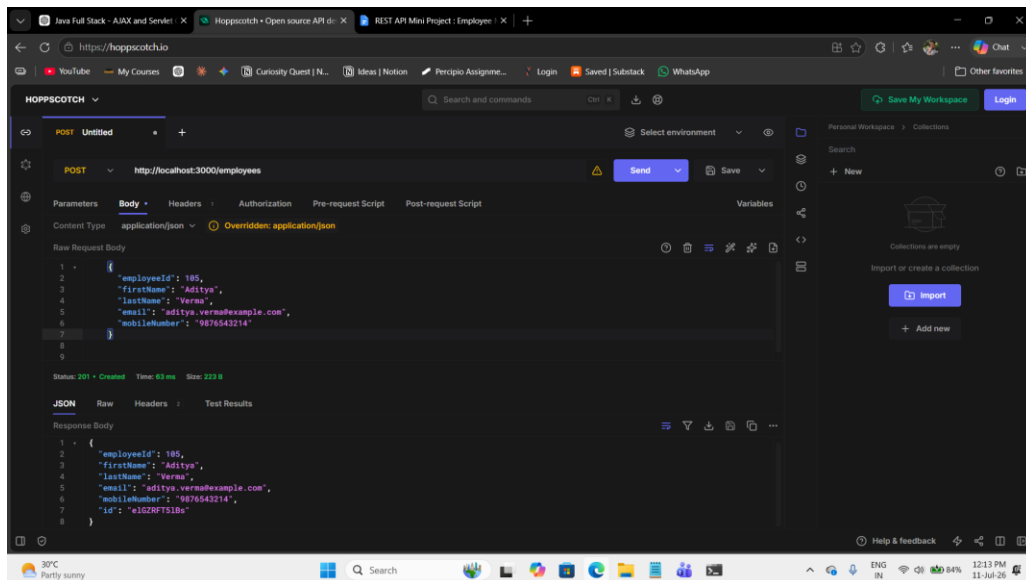


Search employee using ID

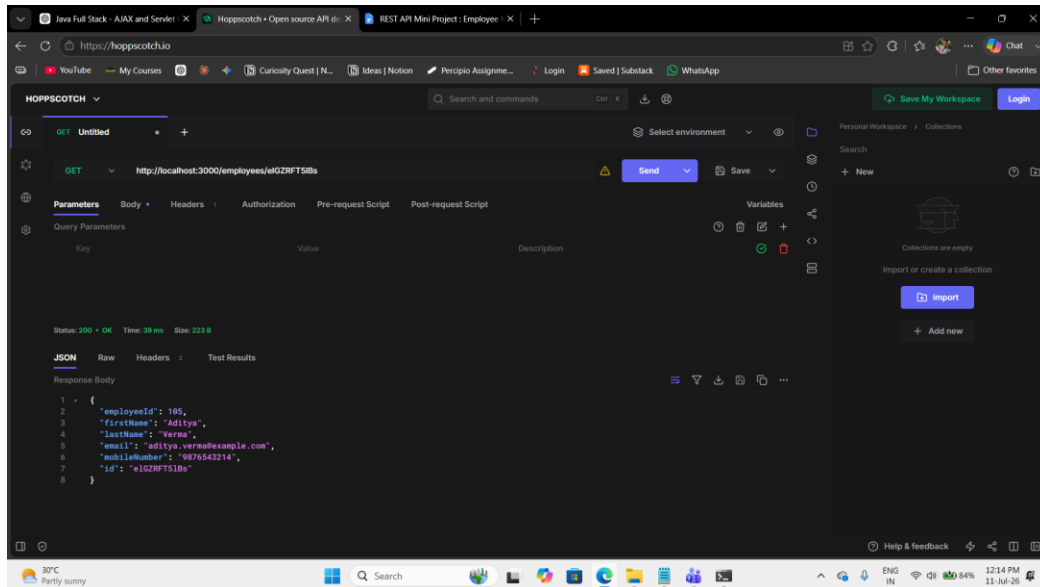

Update employee information using PUT

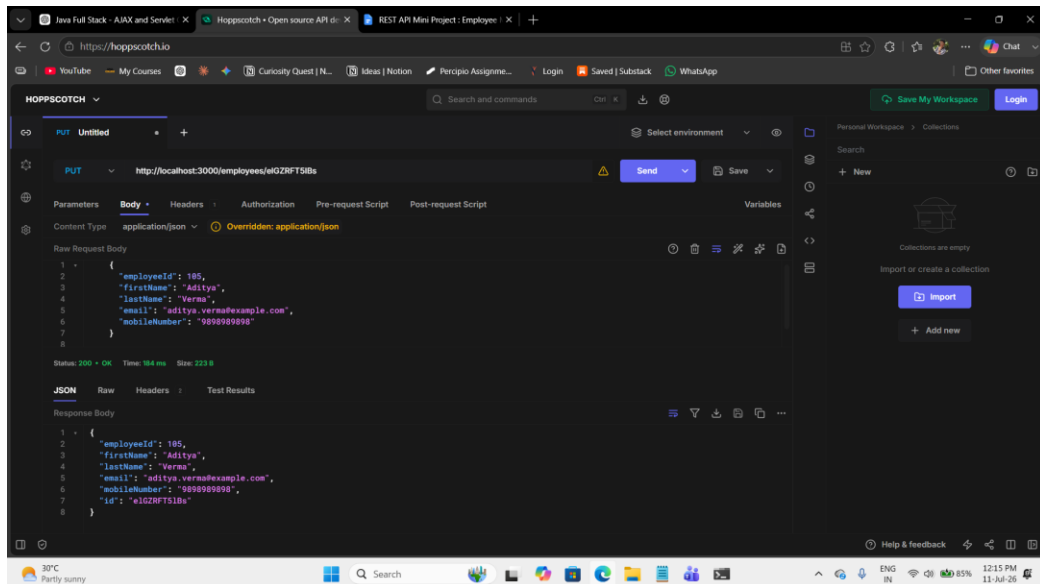

Update employee information using PATCH

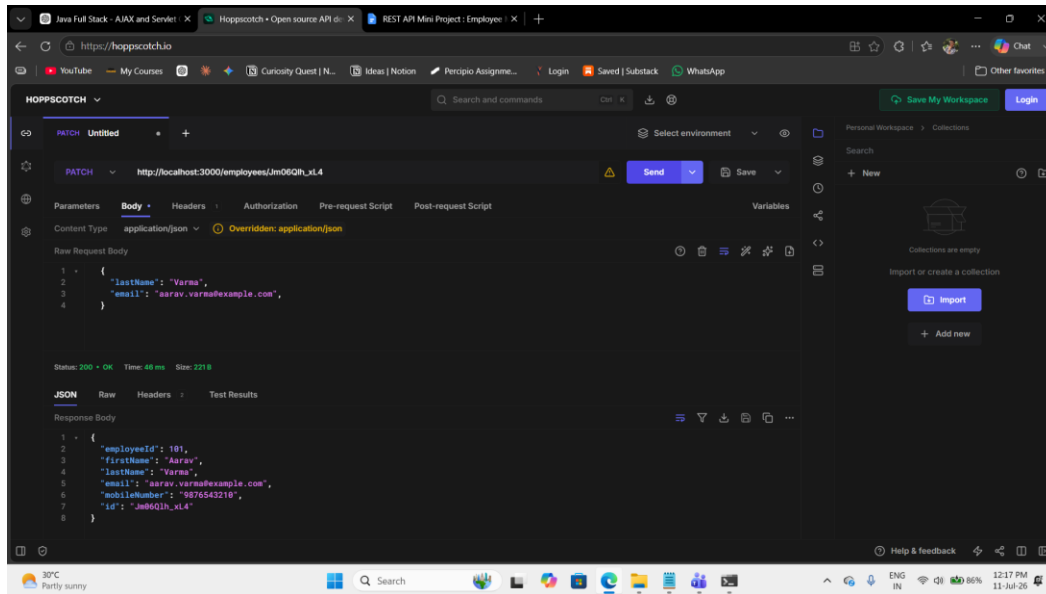

Delete employee using ID

