
Training curves

3 independent LoRA heads on one frozen Mistral-7B, mixed by an evidence-guided gate · 1500 optimizer steps


a Mixture loss

-log Σ αᵢ pᵢ(y) per answer token · lower is better

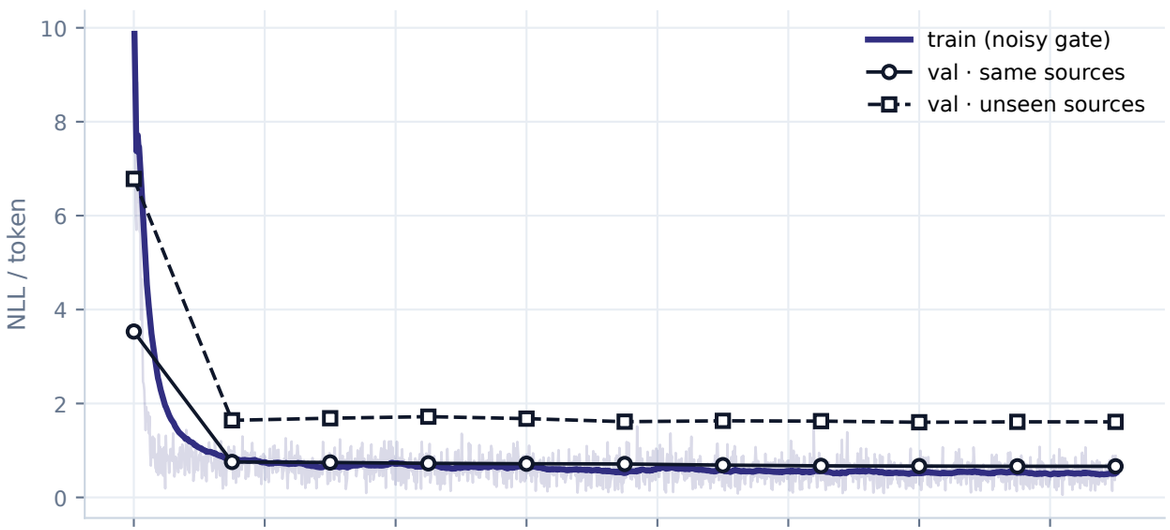


b Each head, individually

heads are trained to be competent alone AND as a mixture

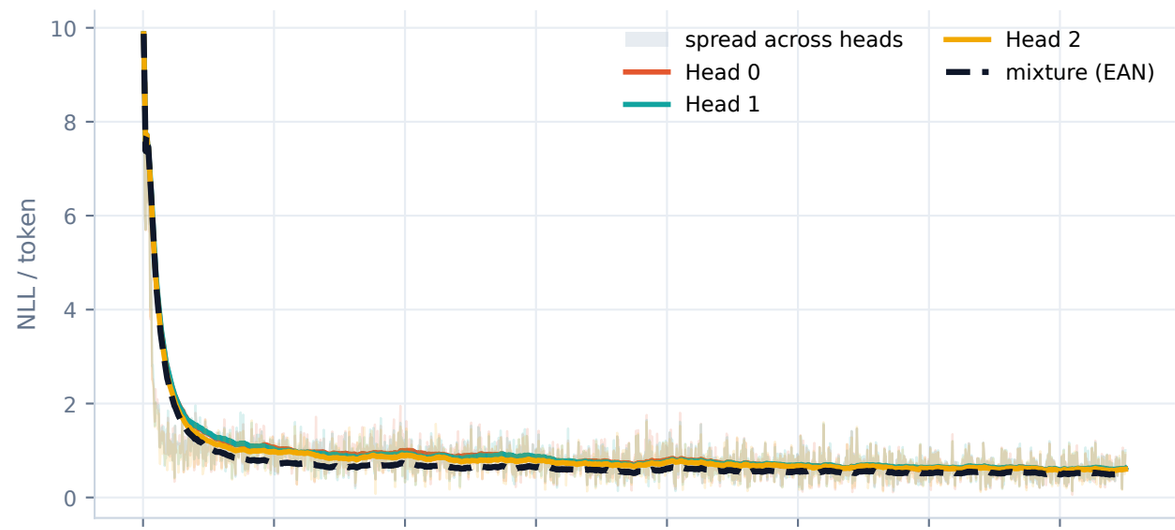

c Does arbitration beat the best head?

same: mixture beats best head by +0.0635 nats · unseen: mixture beats best head by +0.1616 nats

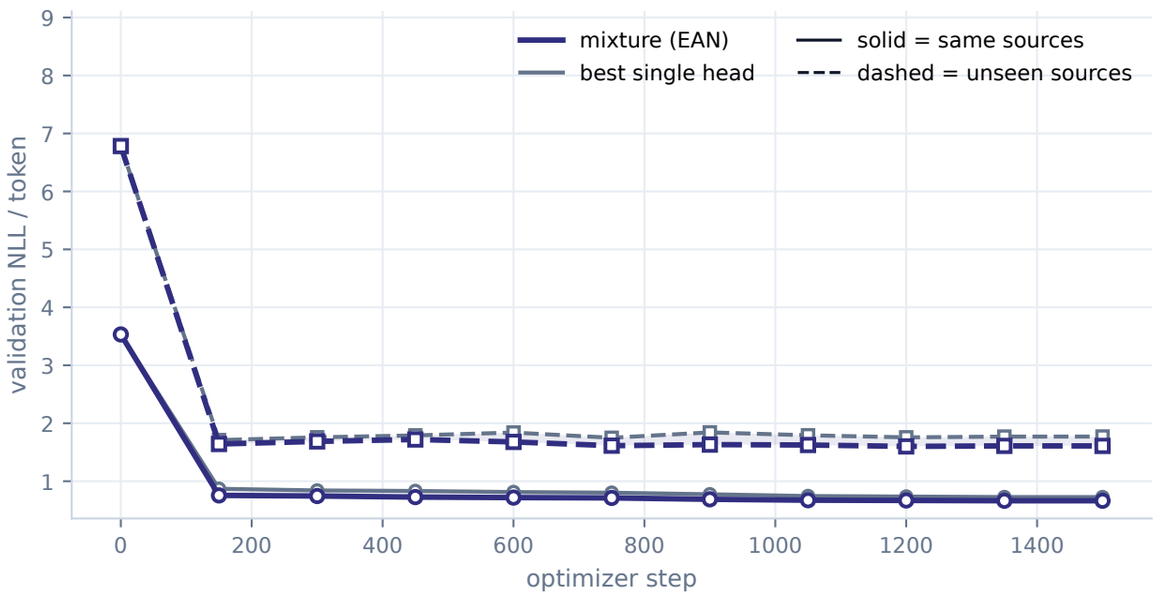

d What the run was doing

ticks at the bottom = validation passes · noise forces the gate to explore early

