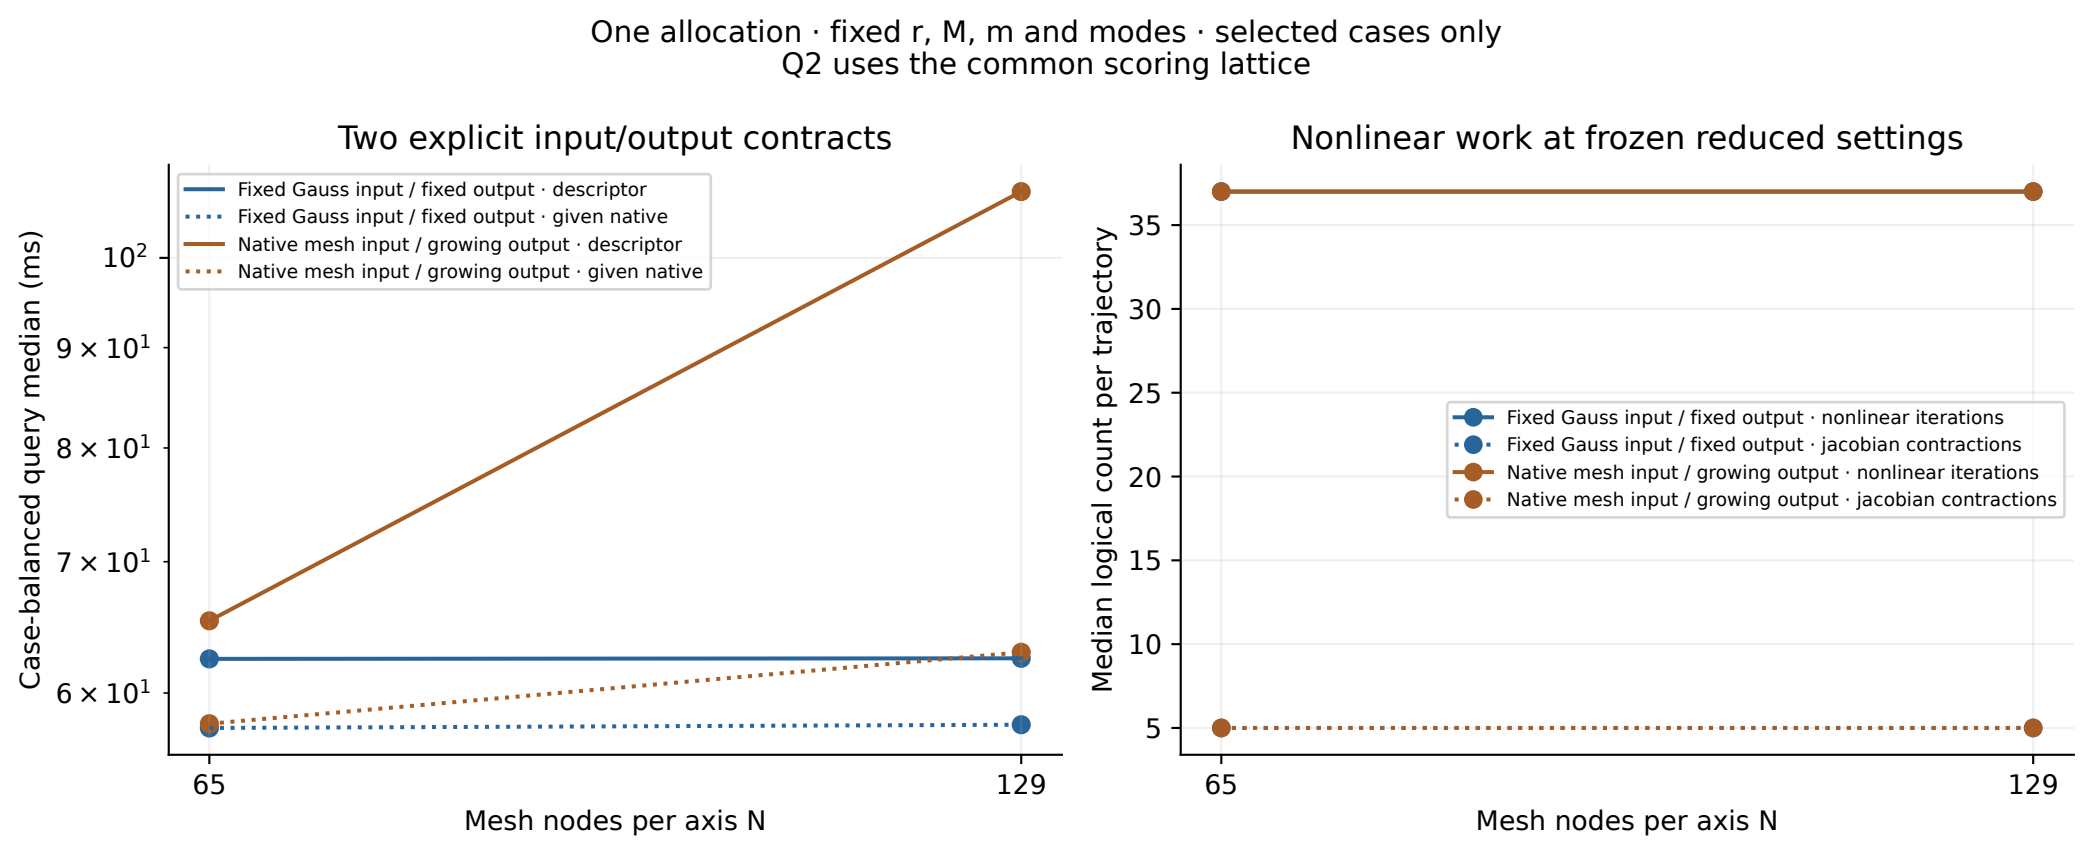
One allocation · fixed r, M, m and modes · selected cases only
Q2 uses the common scoring lattice
Two explicit input/output contracts
Fixed Gauss input / fixed output · descriptor
Fixed Gauss input / fixed output · given native
Native mesh input / growing output · descriptor
Native mesh input / growing output · given native
Case-balanced query median (ms)
10^2
9×10^1
8×10^1
7×10^1
6×10^1
65
129
Mesh nodes per axis N
Nonlinear work at frozen reduced settings
Median logical count per trajectory
35
30
25
20
15
10
5
Fixed Gauss input / fixed output · nonlinear iterations
Fixed Gauss input / fixed output · jacobian contractions
Native mesh input / growing output · nonlinear iterations
Native mesh input / growing output · jacobian contractions
65
129
Mesh nodes per axis N