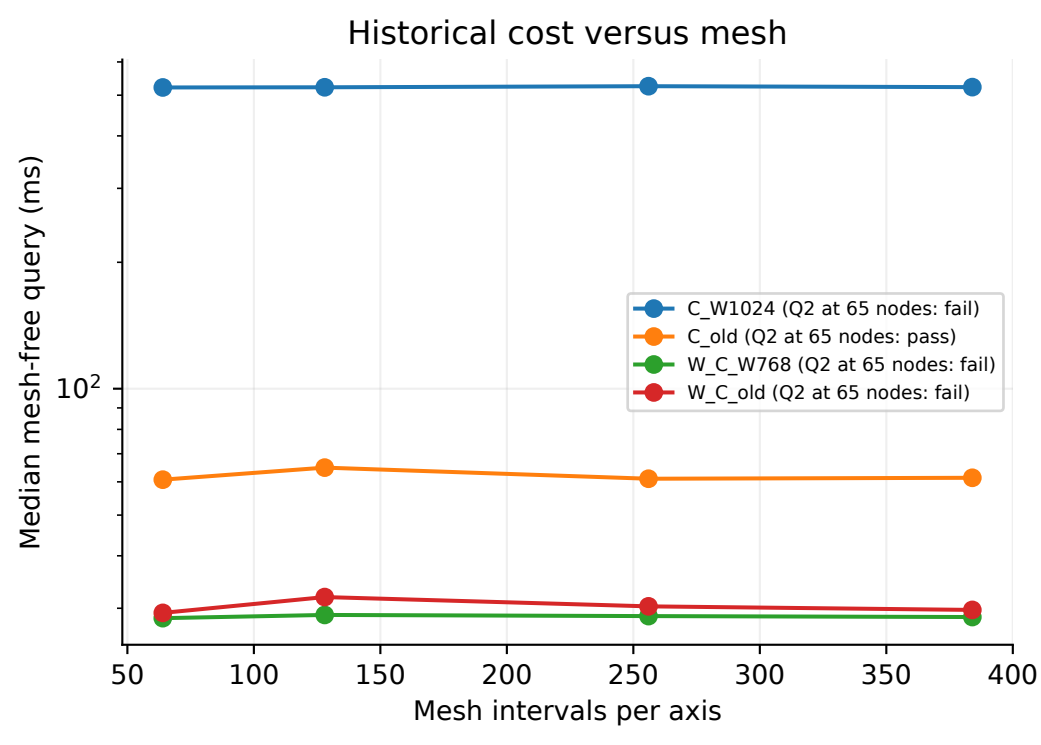
Historical cost versus mesh
Median mesh-free query (ms)
$10^2$
C_W1024 (Q2 at 65 nodes: fail)
C_old (Q2 at 65 nodes: pass)
W_C_W768 (Q2 at 65 nodes: fail)
W_C_old (Q2 at 65 nodes: fail)
50
100
150
200
250
300
350
400
Mesh intervals per axis

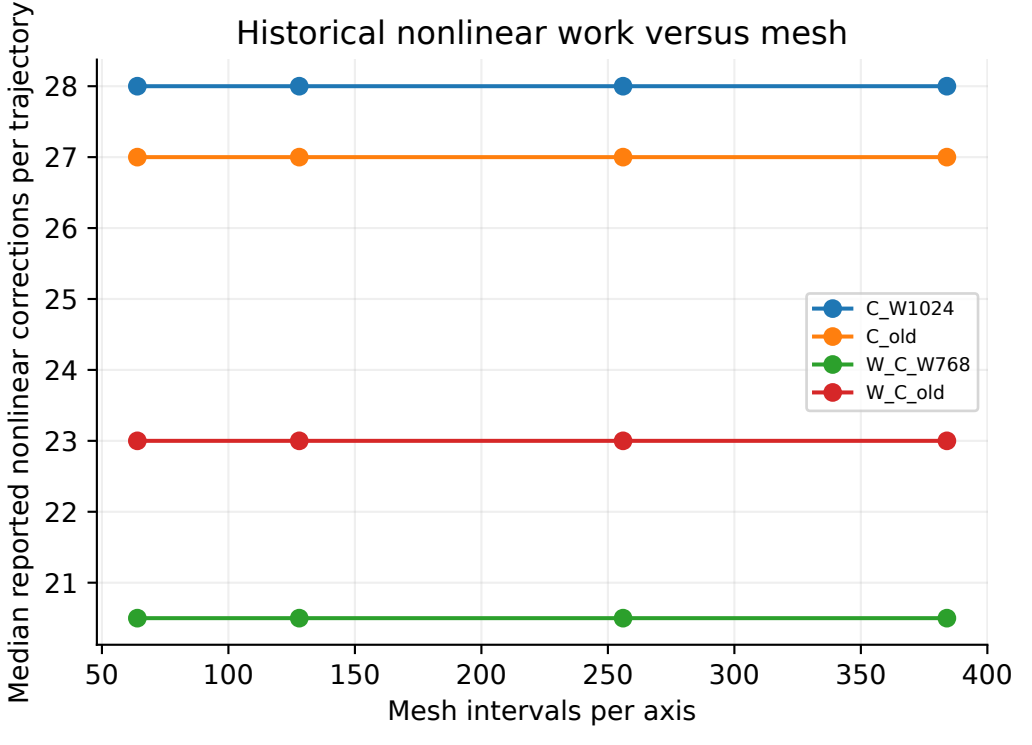
Historical nonlinear work versus mesh
Median reported nonlinear corrections per trajectory
28
27
26
25
24
23
22
21
C_W1024
C_old
W_C_W768
W_C_old
50
100
150
200
250
300
350
400
Mesh intervals per axis