

The decoder keeps improving with k — our solver does not

gap = solver failure, not a data limit

diagnosed: the optimiser STALLS at these k .
Not conditioning — the Jacobian is full rank at every k ,
and the same k fail at every mesh.

held-out error (relative L2)

- what the decoder CAN do (ceiling)
- what our solver ACHIEVES
- solver reaches the ceiling

2

4

6

8


12

16

24

32

latent dimension k

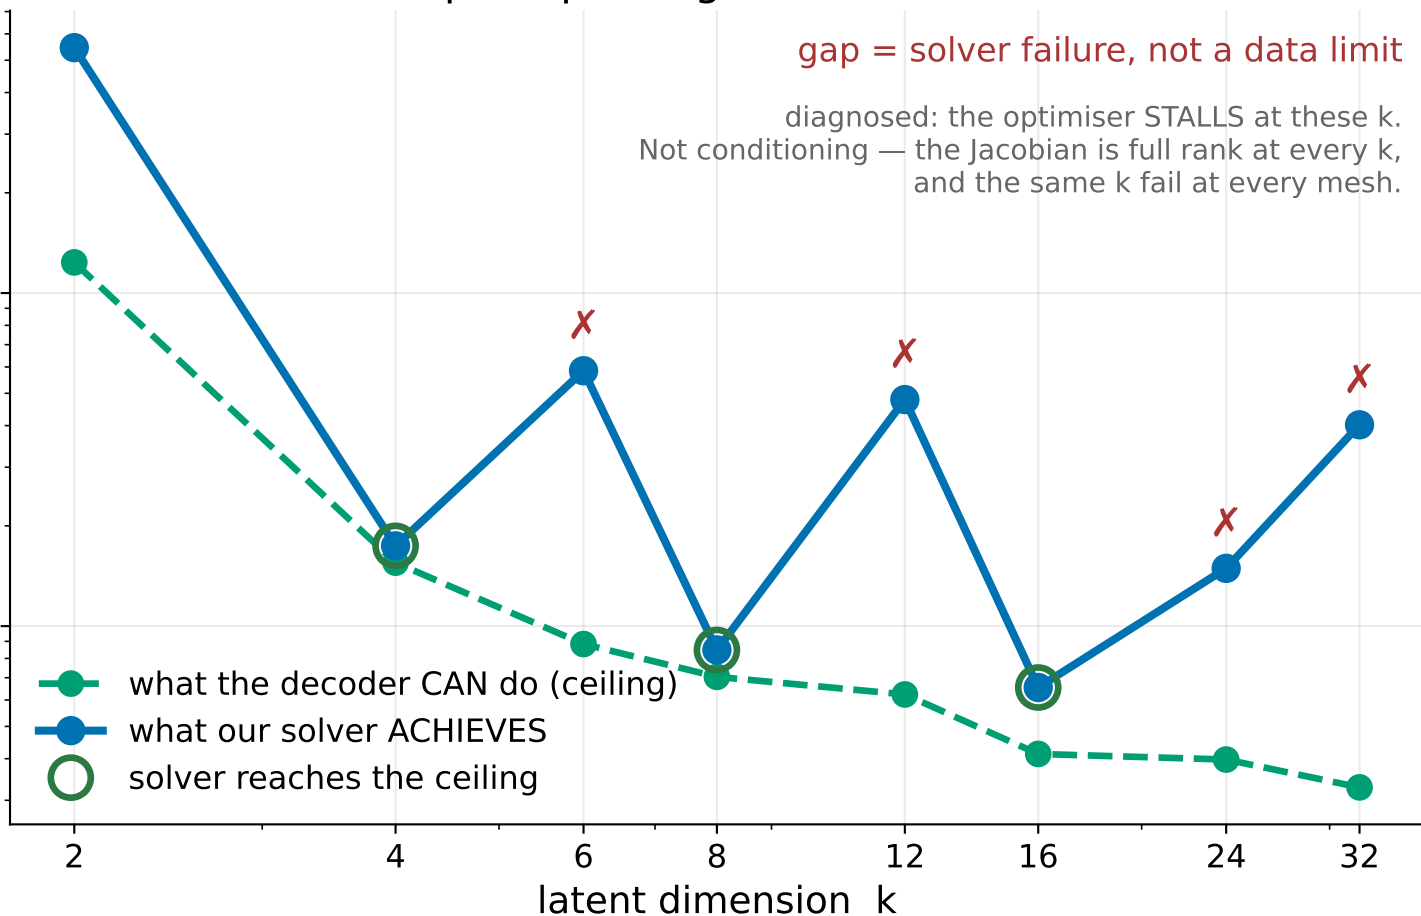

PROVISIONAL — error values pending the consolidation run