



M-PAiSA Payments Gateway API Guide

Version Control

Date	Version	Modified by	Comments
20/02/2026	1.0	Anuraag Singh	Initial Documentation
23/02/2026	1.1	Anuraag Singh	Definitions added
24/02/2026	1.2	Anuraag Singh	Error Code, Data Type
27/02/2026	1.2.1	Anuraag Singh	Links Updated.
22/04/2026	1.3	Anuraag Singh	Upgraded Status API && Data Type Revisions and Token Verifications Notes

Table of Contents

1.0 Introduction	4
2.0 Artefacts Required	5
3.0 How the API works	6
3.1 Initial Handshake – Token Request.....	6
3.2 Redirect - Payments Page.....	6
3.3 Summary of Transaction Flow	7
4.0 Building Transactions with Query Param.....	8
4.1.1 Rest API Methods.....	8
4.1.2 API Sample Structure	8
4.2.0 API Method.....	9
4.2.1 Get Auth Screen	9
4.2.2 Handshake.....	10
4.2.2 Handshake Screen	10
4.2.3 API To Process the Payment.....	11
4.2.3 Payment Process Screen	11
4.2.4 Transaction Status Checker	12
4.2.4 Transaction Status Checker Screen	12
4.3.0 Token authentication for Transaction.....	13
4.3.1 Session Authentication.....	13
4.3.2 Transaction Verification - Redirect.....	13
4.3.3 Success redirect Token	14
4.3.4 Cancelled redirect Verification	14
5.0 Response Codes.....	15



1.0 Introduction

The M-PAiSA Payment Gateway is a secure, scalable, and fully integrated digital payments platform that enables merchants to accept real-time payments through the M-PAiSA mobile money ecosystem. Designed to support e-commerce, mobile applications, and enterprise systems, the gateway provides a seamless bridge between merchant platforms and customer wallets.

The solution allows businesses to initiate, authorize, and confirm transactions electronically, ensuring secure fund transfers from customer M-PAiSA wallets directly to merchant settlement accounts. It supports a wide range of use cases including online purchases, bill payments, subscription services, donations, and digital service payments.

Built with enterprise-grade security standards, the M-PAiSA Payment Gateway incorporates strong encryption, transaction authentication mechanisms, and fraud control features to ensure the integrity and confidentiality of all transactions and provide real-time transaction status updates.

The gateway architecture is designed for high availability and performance, enabling reliable transaction processing even during peak volumes. Through well-documented APIs and integration artifacts, merchants can easily connect their systems to the M-PAiSA ecosystem using secure RESTful services.

By leveraging the widespread adoption of M-PAiSA, the payment gateway empowers businesses to expand their digital reach, enhance customer convenience, and accelerate financial inclusion within the market.

2.0 Artefacts Required

Prior to initiating integration with the M-PAiSA Payment Gateway, merchants must obtain and configure the required technical and operational artifacts. These artifacts consist of system credentials, security keys, endpoint configurations, and environment details necessary to establish secure communication between the merchant platform and the gateway. Proper configuration of these elements is mandatory to ensure successful authentication, transaction processing, and response handling.

2.1 Merchant Configurations

Before integrating with the M-PAiSA Payment Gateway, merchants must have the following artifacts ready:

- Client Secret Key (Token): Issued to the merchant for basic authentication with the gateway.
- Registered M-PAiSA Business Account: A business account under Vodafone where all transactions will be recorded and referenced.
- M-PAiSA Account: The merchant must have an active M-PAiSA account in their name to test the payment services.
- Internet Access: The M-PAiSA Payment Gateway is hosted over the Internet; no IP whitelisting is required.
- Checkout Domain: The merchant must have a domain that can be routed and resolved over the Internet to support gateway integration.

3.0 How the API works

The M-PAiSA Payment Gateway API enables merchants to securely initiate, authorize, and track payments in real-time. The API follows a structured transaction flow to ensure authentication, integrity, and traceability of every payment.

3.1 Initial Handshake – Token Request

Before any payment request, the merchant must perform an **initial handshake** with the gateway:

1. Client generates a token from the API with Client Secret Key. (**Bearer token valid for 10 Mins**)
2. The merchant sends a handshake request to the gateway's **endpoint with Token**.
3. The gateway validates the merchant credentials (Business ID,TID,cID), If valid, the gateway returns:
 - **Request ID** – unique identifier for this transaction session
 - **Auth Digest Token** – temporary Client authentication token to validate the Transaction Details

This handshake establishes a **secure transaction context**, ensuring that all subsequent requests are authenticated and linked to the correct session.

3.2 Redirect - Payments Page

Once the Token from the API is authenticated by the client:


1. The merchant sends a **transaction request** including:
 - Request ID (from handshake)
 - Customer payment details(tid,clientID)
 - Amount, item description, and any metadata
 - Callback URL (checkout route)
2. The merchant must do a token match on their end before proceeding to the gateway to ensure integrity of the payment. This will be check on the client side as a token authentication to compare the token(**authdigestv2**) received and matched by the client.
3. Customer enters the gateway Page after successful token match.
4. Customer enters M-PAiSA Account Details and verifies via 2FA SMS/OTP option.
5. Vodafone payments gateway processes the request. After completion Vodafone redirects back to client website provided in the request with response parameters response code(rCode), transactionID(tID), requestID(rID),customerphonenumber, **tokenv2 - SHA2_256 (transactionID+amount+itemdetails+ "merchantsecret"+responseCode)**.
6. Cancelled transaction sent back to client website provided in the request with response parameters transactionID(tID), requestID(rID), response code(rCode),tokenv2.
Tokenv2: SHA2_256 (transactionID+amount+itemdetails+ "merchantsecret"+responseCode)
7. In cases of incorrect OTP Customer may Resend OTP and retry with 3 Remaining attempts before terminating the Transaction.

3.3 Summary of Transaction Flow

1. **Handshake:** Merchant obtains token & request ID
2. **Transaction Request:** Merchant submits payment request after token
3. **Validation & Processing:** Gateway validates and forwards request for authorization
4. **Successful Response:** Immediate transaction status returned with parameters.

This flow ensures secure, traceable, and real-time payment processing for merchants integrating with M-PAiSA.

3.4 Payments Gateway Flow Diagram

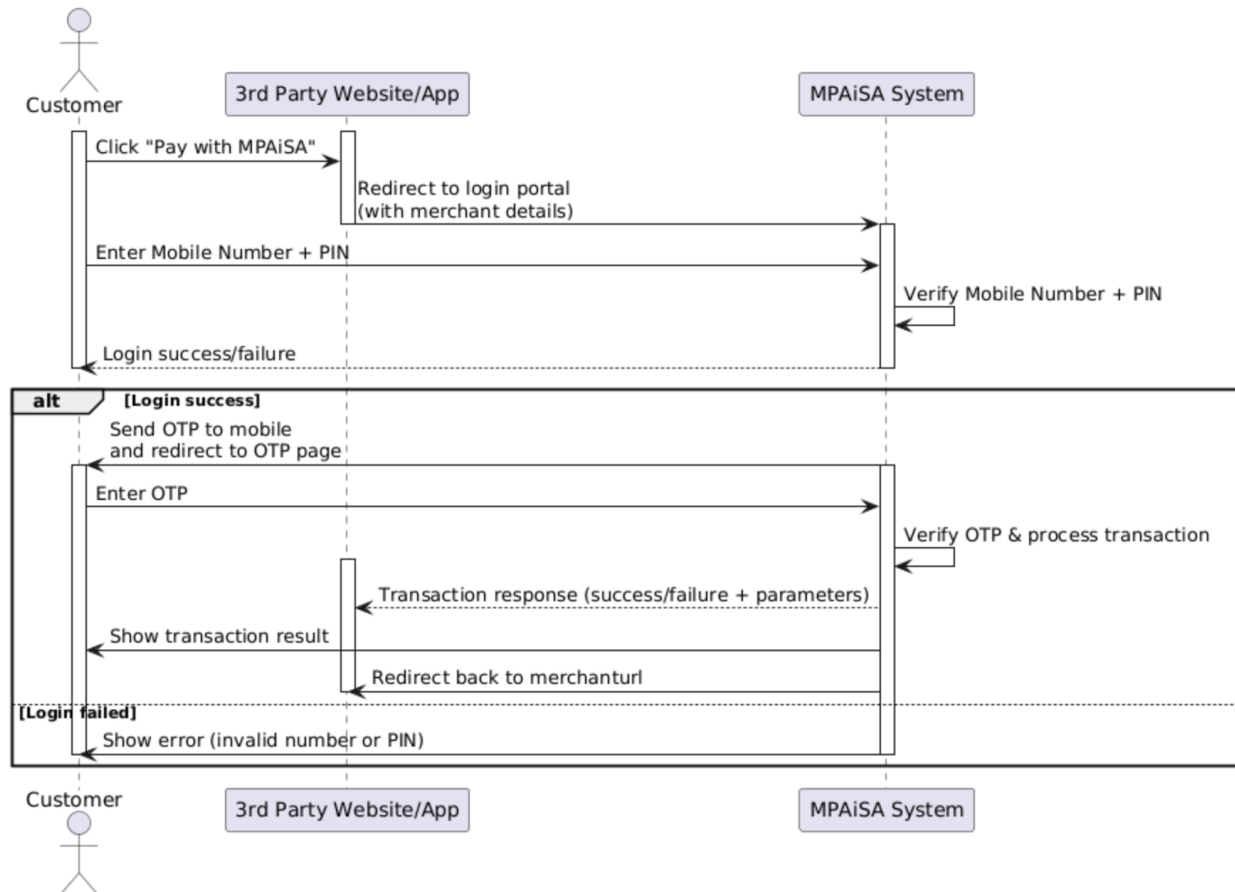

4.0 Building Transactions with Query Param

4.1 Request Packet Format

Parameter Name descriptive name -> param	Field Type	Description	Example
Merchantid -> (tID)	String	Up to 200 Char supported	123456543VF
Clientid -> (cID)	INT	Business ID assigned to Merchant	20XXX
Amount -> (amt)	Money	Numeric to max limit of 9 digits and decimal two place	10.50
ItemDetail -> (iDet)	String	Description on the Item, e.g., Buying iPhone 17pro max	e.g.iPhone17 from apple store
MerchantUrl -> (url)	String	Url provided by merchant	Example.com
RequestID ->(rID)	INT	An ID assigned by M-PAiSA API to complete the transaction.	121572

4.1.1 Rest API Methods

The gateway allows both GET/POST HTTP Methods for communication and the API calls demonstrated below can be used with either protocol supported by the merchant.

Test: <https://payments-staging.m-paisa.com>

Live: <https://payments.m-paisa.com>

4.1.2 API Sample Structure

1st API call: {test}/live/API/generateAuth

2nd API call: {test}/live/API/?url=vodafone.com.fj&tID=100&amt=0.01&cID=XXXXX&iDet=sample

3rd API call: {Test}/live/?url=vodafone.com.fj&tID=100&amt=0.01&cID=XXXXX&iDet=sample&rID=XXXXX


4th API call: {Test}/live/requeststatus/?rID=XXXXX&tID=XXXXX&cID=XXXXX

4.2.0 API Method

4.2.1 Get Auth

POST: GenerateAuth	
https://payments-staging.m-paisa.com/live/API/generateAuth	
Headers	NA
Request	<pre>{ "clientId": "XXXXX", -- issued by VF "clientSecret": "XXXXXXXXXXXXXXXXXXXXXXXXXXXX" -- issued by VF }</pre>
Response JSON	<pre>{ "expiresIn": 600, "success": true, "tokenType": "Bearer", "expiresAt": 1771817791857, "token": "eyJhbGciOiJIUzI1NiIsInR5cGE6MTc3MTgxNzc5MX0uXVBa9m0JxKhM6- WmmapWkQ5bhLFwkKpHmnmunJI2qn3alH3m7yldV-uKW9JWOSZT8", "merchantName": "Vodafone Fiji PostPay Payments" }</pre>

4.2.1 Get Auth Screen

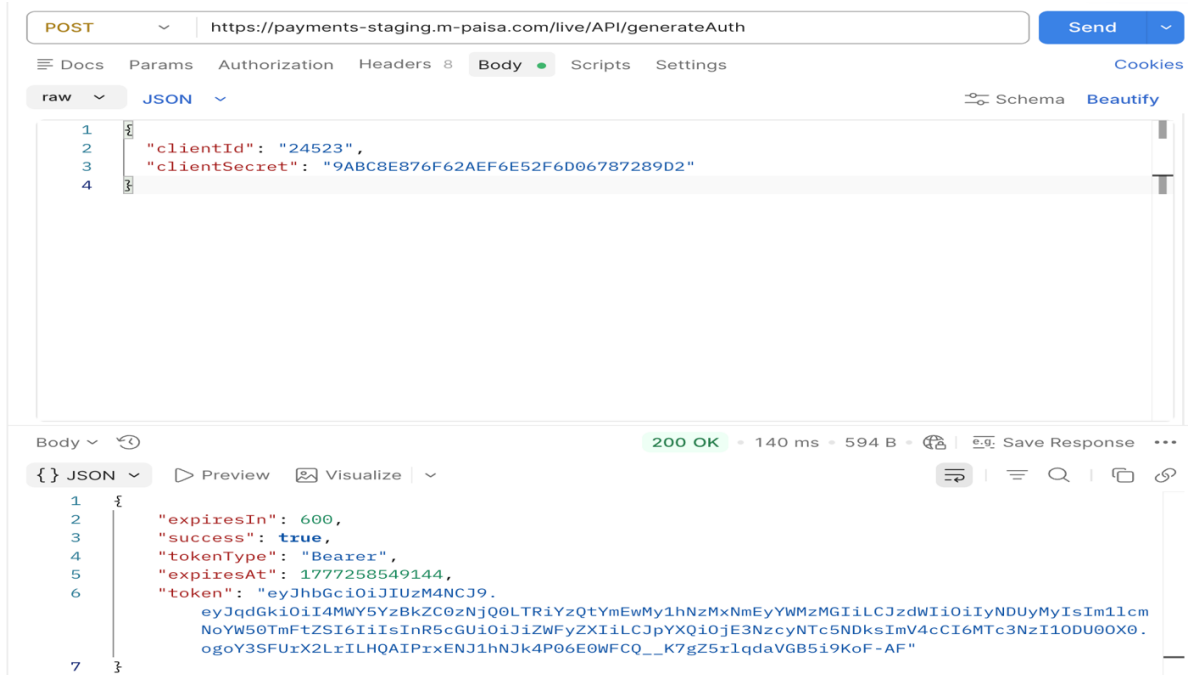

The screenshot shows a REST client interface with a POST request to `https://payments-staging.m-paisa.com/live/API/generateAuth`. The request body is a JSON object with `clientId` and `clientSecret`. The response is a 200 OK status with a JSON body containing `expiresIn`, `success`, `tokenType`, `expiresAt`, `token`, and `merchantName`.

```
POST https://payments-staging.m-paisa.com/live/API/generateAuth
```


```
{
  "clientId": "24523",
  "clientSecret": "9ABC8E876F62AEF6E52F6D06787289D2"
}
```

```
{
  "expiresIn": 600,
  "success": true,
  "tokenType": "Bearer",
  "expiresAt": 1777258549144,
  "token": "eyJhbGciOiJIUzI1NiIsInR5cGE6MTc3MTgxNzc5MX0uXVBa9m0JxKhM6-WmmapWkQ5bhLFwkKpHmnmunJI2qn3alH3m7yldV-uKW9JWOSZT8",
  "merchantName": "Vodafone Fiji PostPay Payments"
}
```

4.2.2 Handshake

GET: Handshake 1st call		
URL: https://payments-staging.m-paisa.com/API/?url=bnh.com&tID= 9876567876&amt=0.01&cID=24604&iDet=Sample		
Headers	"Authorization: Bearer <insert token here >"	
Query Params	key	value
	Enter url	Bnh.com
	Enter tID	9876567876
	Enter amt	0.01
	Enter cID	20434
	Enter iDet	sample
Response JSON	<pre>{ "paymentspage": "https://payments-staging.m-paisa.com/live/", "requestID": 94570, "authdigest": null, "response": 101, "authdigestv2": "E446294AFE4A27E41C96BF9C7F0D4CB4DFCEB9A4ADDE0DBC515E445B612A1948" }</pre>	

4.2.2 Handshake Screen

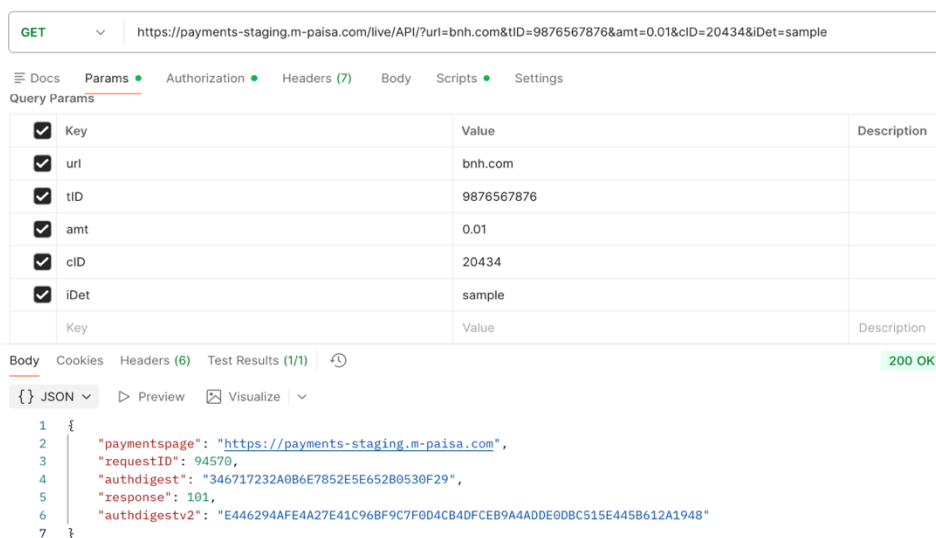

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** <https://payments-staging.m-paisa.com/live/API/?url=bnh.com&tID=9876567876&amt=0.01&cID=20434&iDet=sample>
- Query Params:**

Key	Value	Description
url	bnh.com	
tID	9876567876	
amt	0.01	
cID	20434	
iDet	sample	
- Body:**

```
{
  "paymentspage": "https://payments-staging.m-paisa.com",
  "requestID": 94570,
  "authdigest": "346717232A0B6E7852E5E65280530F29",
  "response": 101,
  "authdigestv2": "E446294AFE4A27E41C96BF9C7F0D4CB4DFCEB9A4ADDE0DBC515E445B612A1948"
}
```
- Status:** 200 OK

4.2.3 API To Process the Payment

GET: Load Payments Page		
URL: https://payments-staging.m-paisa.com/live/?url=bnh.com&tID=987656789&amt=0.01&cID=24604&iDet=Sample&rID= 94570		
Headers	NA	
Query Params	key	value
	Enter url	Bnh.com
	Enter tID	9876567876
	Enter amt	10.50
	Enter cID	24604
	Enter iDet	sample
	Enter rID	94568
Response	200 OK Returns the M-PAiSA Payment Gateway web page. Content-Type: text/html The page renders the login/payment interface.	

4.2.3 Payment Process Screen

GET
https://payments-staging.m-paisa.com/live/?url=bnh.com&tID=9876567876&amt=0.01&cID=20434&iDet=sample&rID=94570

Docs Params Authorization Headers (6) Body Scripts Settings

Query Params

☒	Key	Value	Description
☒	url	bnh.com	
☒	tID	9876567876	
☒	amt	0.01	
☒	cID	20434	
☒	iDet	sample	
☒	rID	94570	

Body Cookies Headers (13) Test Results
200 OK

HTML

```

1 <!DOCTYPE html><!--X9wXHCXBRFZ7dzbTbMJ2-->
2 <html lang="en">
3
4 <head>
5   <meta charset="utf-8" />
6   <meta name="viewport" content="width=device-width, initial-scale=1" />
7   <link rel="stylesheet" href="/_next/static/chunks/1c56f9a64b866d41.css" data-precedence="next" />
8   <link rel="preload" as="script" fetchPriority="low" href="/_next/static/chunks/8f803aaf3992c0e2.js" />
9   <script src="/_next/static/chunks/9387c535c7b63ecc.js" async=""></script>
10  <script src="/_next/static/chunks/f2f58a7e93290fbb.js" async=""></script>
11  <script src="/_next/static/chunks/3e9f06c5f628f395.js" async=""></script>
12  <script src="/_next/static/chunks/turbopack-444e3e59b87496a5.js" async=""></script>
13  <script src="/_next/static/chunks/2f236954d6a65e12.js" async=""></script>
14  <script src="/_next/static/chunks/b9918483cbb08679.js" async=""></script>
15  <script src="/_next/static/chunks/7d6c0a3c51f0bcd3.js" async=""></script>
16  <script src="/_next/static/chunks/957ee86791d0a773.js" async=""></script>

```

4.2.4 Transaction Status Checker

GET & : Status Checker		
URL: https://payments-staging.m-paisa.com/live/requeststatus/?rID=92672&tID=25110513003992458&cID=24535		
Headers	Authorization: Bearer <insert token here>	
Query Params	key	value
	rID	96076
	tID	124
	cID	20434
Response	<pre>{ "responsecode": 101, "transactionid": "124", "itemDes": "test", "requestid": 96076, "requestIDstatus": "SUCCESS", "statusmessage": "Transaction Successful", "amount": 0.01, "customerphone": "9290013", "completedate": "2026-04-23T04:46:28.793+00:00" }</pre>	

4.2.4 Transaction Status Checker Screen

GET
https://payments-staging.m-paisa.com/live/requeststatus/?rID=96076&tID=124&cID=20434

Docs Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description
☒ rID	96076	
☒ tID	124	
☒ cID	20434	
Key	Value	Description

Body
200 OK • 114 ms • 480 B

JSON

```

1 {
2   "responsecode": 101,
3   "transactionid": "124",
4   "itemDes": "test",
5   "requestid": 96076,
6   "requestIDstatus": "SUCCESS",
7   "statusmessage": "Transaction Successful",
8   "amount": 0.01,
9   "customerphone": "9290013",
10  "completedate": "2026-04-23T16:46:28.793+00:00"
11 }
```

4.3.0 Token authentication for Transaction

Token authentication ensures that redirect responses received from M-PAiSA are genuine and untampered. The `tokenv2` parameter is a SHA256 hash generated by M-PAiSA using transaction details and the merchant secret. Merchants verify this by recomputing the hash on their end and comparing it against the `tokenv2` received in the redirect URL. Any modification to the redirect parameters will result in a hash mismatch, protecting merchants against redirect tampering and fraudulent transaction claims.

4.3.1 Session Authentication

Clients are requested to do a digest calculation on their end before triggering the Gateway Page (3rd API) to ensure that the transaction does not fail due to hash mismatch.

SHA-256 example – **authdigestv2 from handshake API.**

Formula: **SHA_256** (transactionID+amount+itemdetails+ "merchantsecret"+responseCode)

Input your text here:

98765678760.01sample21EE001E711CF012CDEFD139F90B1E90101

SHA256 hash: e446294afe4a27e41c96bf9c7f0d4cb4dfceb9a4adde0dbc515e445b612a1948

Once the token matches you may proceed with the 3rd API call to complete the payment.

- Check if Auth token calculated matches the one provided in the response of the handshake API.

4.3.2 Transaction Verification - Redirect

M-PAiSA appends `tokenv2` to all redirect URLs. Merchants **MUST** verify `tokenv2` before fulfilling any order or processing any transaction outcome. Compare your calculated hash against `tokenv2` in the redirect URL. Only proceed if they match.


Failure to verify `tokenv2` leaves your integration vulnerable to redirect tampering attacks. mPaisa accepts no liability for losses resulting from failure to verify `tokenv2`.

Compare your calculated hash against `tokenv2` from the redirect URL. Only proceed if they match.

4.3.3 Success redirect Token

SHA-256 example – Tokenv2

Formula: **SHA_256** (transactionID+amount+itemdetails+requestid "merchantsecret"+responseCode)

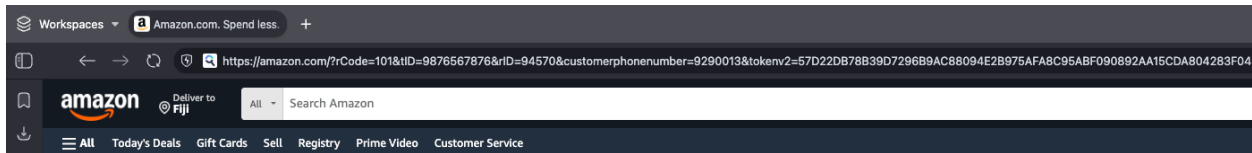

Input value

98765678760.01sample9457021EE001E711CF012CDEFD139F90B1E90101


SHA256 HASH

57d22db78b39d7296b9ac88094e2b975afa8c95abf090892aa15cda804283f04

4.3.4 Cancelled redirect Verification

SHA-256 example – Tokenv2

Formula: **SHA_256** (transactionID+amount+itemdetails+requestid "merchantsecret"+responseCode)

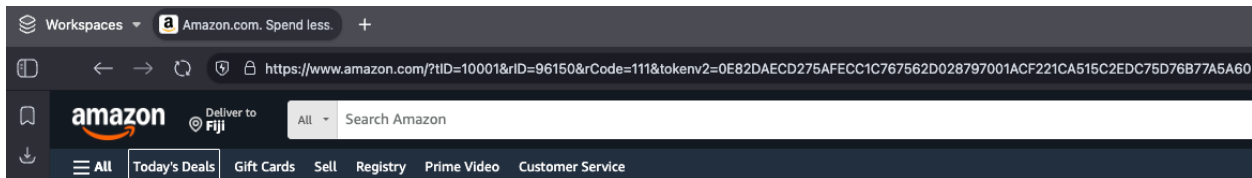

Input value

100010.01test9615021EE001E711CF012CDEFD139F90B1E90111

SHA256 HASH

0e82daecd275afecc1c767562d028797001acf221ca515c2edc75d76b77a5a60

Note: ensure to have the correct case sensitive values when verifying tokens.

(Disclaimer: if transactions proceed with mismatched or unverified token Vodafone is not liable).

5.0 Response Codes

rCode	Description
100	PENDING
101	SUCCESS
102	Authentication failed
103	NO MPAiSA associated to number
104	Transaction not found
105	Token mismatch
106	OTP Authentication Failed
107	Business account does not exist
108	Customer does not have enough balance
109	invalid input
110	request already exists and inprogress
111	Cancelled transaction
112	Transaction completed successfully
113	Transaction failed
132	reCaptcha failed
155	Too many failed attempts