

CH08-320201

Algorithms and Data Structures


ADS

Lecture 20

Dr. Kinga Lipskoch


Spring 2019

Knapsack Problem (Revisited)

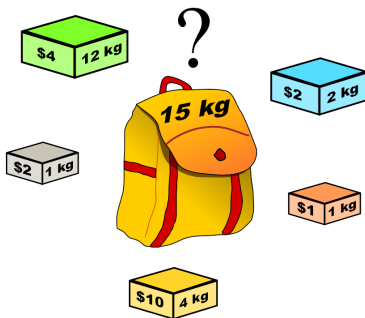

Knapsack Problem: Greedy Algorithm

- ▶ Greedy approaches make a locally optimal choice.
- ▶ There is no guarantee that this will lead to a globally optimal solution.
- ▶ In the 0-1 Knapsack Problem it did not.

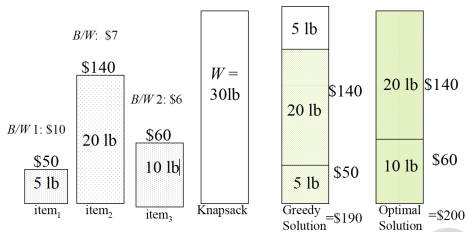

Knapsack Problem: Dynamic Programming Approach (1)

- ▶ Let us try a dynamic programming approach.
- ▶ We need to carefully identify the subproblems.
- ▶ If items are labeled $1..n$, then a subproblem would be to find an optimal solution for $S_k = \{\text{items labeled } 1, 2, \dots, k\}$.

Knapsack Problem: Dynamic Programming Approach (2)

Max weight: $W = 20$

$w_1=2$	$w_2=4$	$w_3=5$	$w_4=3$	
$b_1=3$	$b_2=5$	$b_3=8$	$b_4=4$	

For S_4 :

Total weight: 14

Maximum benefit: 20

$w_1=2$	$w_2=4$	$w_3=5$	$w_5=9$
$b_1=3$	$b_2=5$	$b_3=8$	$b_5=10$

For S_5 :

Total weight: 20

Maximum benefit: 26

	Weight	Benefit
Item #	w_i	b_i
1	2	3
2	4	5
3	5	8
4	3	4
5	9	10

S_4 is indicated by a bracket around items 1, 2, 3, and 4.

S_5 is indicated by a bracket around items 1, 2, 3, 4, and 5.

Solution for S_4 is not part of the solution for S_5

Knapsack Problem: Dynamic Programming Approach (3)

- ▶ Re-define the subproblem by also considering the weight that is given to the subproblem.
- ▶ The subproblem then will be to compute $V[k, w]$, i.e., to find an optimal solution for $S_k = \{\text{items labeled } 1, 2, \dots, k\}$ in a knapsack of size w , with $w \leq W$.
- ▶ $V[k, w]$ denotes the overall benefit of the solution.
- ▶ **Question:** Assuming we know $V[i, j]$ for $i = 0, 1, 2, \dots, k - 1$ and $j = 0, 1, 2, \dots, w$, how can we derive $V[k, w]$?
- ▶ **Answer:**

$$V[k, w] = \begin{cases} V[k-1, w] & \text{if } w_k > w \\ \max\{V[k-1, w], V[k-1, w - w_k] + b_k\} & \text{else} \end{cases}$$

Knapsack Problem: Dynamic Programming Approach (4)

- Explanation of

$$V[k, w] = \begin{cases} V[k-1, w] & \text{if } w_k > w \\ \max\{V[k-1, w], V[k-1, w - w_k] + b_k\} & \text{else} \end{cases}$$

- The best subset of S_k that has the total weight $\leq w$, either contains item k or not.
- First case: $w_k > w$.
Item k cannot be part of the solution, since if it was, the total weight would be $> w$, which is unacceptable.
- Second case: $w_k \leq w$.
Then the item k can be in the solution, and we choose the case with greater value.

Knapsack Problem: Dynamic Programming Approach (5)

Dynamic-programming algorithm:

Input: $S_n = \{(w_i, b_i) : i = 1, \dots, n\}$ and maximum weight W

```

1  for w = 0 to W
2    V[0,w] = 0
3  for i = 1 to n
4    V[i,0] = 0
5  for i = 1 to n
6    for w = 0 to W
7      if (w_i > w) // i cannot be part of solution
8        V[i,w] = V[i-1,w]
9      else          // w_i <= w
10         if (V[i-1,w] > b_i + V[i-1,w-w_i])
11           V[i,w] = V[i-1,w]
12         else
13           V[i,w] = b_i + V[i-1,w-w_i]
```


Knapsack Problem: Dynamic Programming Approach (6)

Computation time:

$O(W)$

```
for w = 0 to W
```

```
  V[0,w] = 0
```

$O(n)$

```
for i = 1 to n
```

```
  V[i,0] = 0
```

```
for i = 1 to n
```

$O(nW)$

```
  for w = 0 to W
```

```
    if ( $w_i > w$ )
```

```
      V[i,w] = V[i-1,w]
```

```
    else
```

```
      if ( $V[i-1,w] > b_i + V[i-1,w-w_i]$ )
```

```
        V[i,w] = V[i-1,w]
```

```
      else
```

```
        V[i,w] =  $b_i + V[i-1,w-w_i]$ 
```

Overall time complexity
is **$O(nW)$**

Knapsack Problem: Dynamic Programming Approach (7)

Example:

- ▶ $n = 4$ (# of elements)
- ▶ $W = 5$ (maximum weight)
- ▶ Elements (weight, benefit):
(2, 3), (3, 4), (4, 5), (5, 6)

Knapsack Problem: Dynamic Programming Approach (8)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1						
2						
3						
4						

```
1 for w = 0 to W
2   V[0,w] = 0
```

Knapsack Problem: Dynamic Programming Approach (9)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0					
2	0					
3	0					
4	0					

```
1 for i = 1 to n
2   V[i,0] = 0
```

Knapsack Problem: Dynamic Programming Approach (10)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0				
2	0					
3	0					
4	0					

 $i=1$ $b_i=3$ $w_i=2$ $w=1$ $w-w_i=-1$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (11)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3			
2	0					
3	0					
4	0					

 $i=1$ $b_i=3$ $w_i=2$ $w=2$ $w-w_i=0$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (12)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3		
2	0					
3	0					
4	0					

 $i=1$ $b_i=3$ $w_i=2$ $w=3$ $w-w_i=1$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (13)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	
2	0					
3	0					
4	0					

 $i=1$ $b_i=3$ $w_i=2$ $w=4$ $w-w_i=2$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```


Knapsack Problem: Dynamic Programming Approach (14)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0					
3	0					
4	0					

 $i=1$ $b_i=3$ $w_i=2$ $w=5$ $w-w_i=3$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (15)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0				
3	0					
4	0					

 $i=2$ $b_i=4$ $w_i=3$ $w=1$ $w-w_i=-2$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (16)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3			
3	0					
4	0					

 $i=2$ $b_i=4$ $w_i=3$ $w=2$ $w-w_i=-1$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```
if  $w_i \leq w$  // item i can be part of the solution
```

```
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
```

```
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
```

```
    else
```

```
         $V[i, w] = V[i-1, w]$ 
```

```
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 
```

Knapsack Problem: Dynamic Programming Approach (17)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4		
3	0					
4	0					

 $i=2$ $b_i=4$ $w_i=3$ $w=3$ $w-w_i=0$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (18)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	
3	0					
4	0					

 $i=2$ $b_i=4$ $w_i=3$ $w=4$ $w-w_i=1$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (19)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0					
4	0					

 $i=2$ $b_i=4$ $w_i=3$ $w=5$ $w-w_i=2$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (20)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4		
4	0					

 $i=3$ $b_i=5$ $w_i=4$ $w=1..3$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (21)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	
4	0					

 $i=3$ $b_i=5$ $w_i=4$ $w=4$ $w-w_i=0$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```


Knapsack Problem: Dynamic Programming Approach (22)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0					

 $i=3$ $b_i=5$ $w_i=4$ $w=5$ $w-w_i=1$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (23)

$i \backslash W$	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	↓ 0	↓ 3	↓ 4	↓ 5	

$i=4$
 $b_i=6$
 $w_i=5$
 $w=1..4$

Items:

1: (2,3)
 2: (3,4)
 3: (4,5)
 4: (5,6)

```

if  $w_i \leq w$  // item  $i$  can be part of the solution
  if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
     $V[i, w] = b_i + V[i-1, w-w_i]$ 
  else
     $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 
  
```

Knapsack Problem: Dynamic Programming Approach (24)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

 $i=4$ $b_i=6$ $w_i=5$ $w=5$ $w-w_i=0$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

```

if  $w_i \leq w$  // item i can be part of the solution
    if  $b_i + V[i-1, w-w_i] > V[i-1, w]$ 
         $V[i, w] = b_i + V[i-1, w-w_i]$ 
    else
         $V[i, w] = V[i-1, w]$ 
else  $V[i, w] = V[i-1, w]$  //  $w_i > w$ 

```

Knapsack Problem: Dynamic Programming Approach (25)

- ▶ This algorithm only finds the maximally possible value that can be carried in the knapsack, i.e., the value of $V[n, W]$.
- ▶ To know the items that are put together to reach this maximum value, an addition to this algorithm is necessary that is based on traversing the table in a post-processing step.
- ▶ **Algorithm:**

```
1 i=n, k=W
2 while (i > 0 and k > 0)
3     if (V[i,k] != V[i-1,k])
4         add item i to knapsack
5         i = i-1, k = k-wi
6     else // item i is not in the knapsack
7         i = i-1
```

Knapsack Problem: Dynamic Programming Approach (26)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

 $i=4$ $k=5$ $b_i=6$ $w_i=5$ $V[i,k]=7$ $V[i-1,k]=7$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

 $i=n, k=W$ while ($i > 0$ and $k > 0$) if ($V[i,k] \neq V[i-1,k]$) mark the i^{th} item as in the knapsack $i = i-1, k = k-w_i$

else

 $i = i-1$

Knapsack Problem: Dynamic Programming Approach (27)

$i \backslash W$	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

 $i=4$ $k=5$ $b_i=6$ $w_i=5$ $V[i,k]=7$ $V[i-1,k]=7$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

 $i=n, k=W$ while ($i > 0$ and $k > 0$)if ($V[i,k] \neq V[i-1,k]$)mark the i^{th} item as in the knapsack $i = i-1, k = k-w_i$

else

 $i = i-1$

Knapsack Problem: Dynamic Programming Approach (28)

i \ W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

 $i=3$ $k=5$ $b_i=5$ $w_i=4$ $V[i,k]=7$ $V[i-1,k]=7$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

 $i=n, k=W$ while ($i > 0$ and $k > 0$) if ($V[i,k] \neq V[i-1,k]$) mark the i^{th} item as in the knapsack $i = i-1, k = k-w_i$

else

 $i = i-1$

Knapsack Problem: Dynamic Programming Approach (29)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

 $i=2$ $k=5$ $b_i=4$ $w_i=3$ $V[i,k]=7$ $V[i-1,k]=3$ $k-w_i=2$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

 $i=n, k=W$ while ($i > 0$ and $k > 0$)if ($V[i,k] \neq V[i-1,k]$)mark the i^{th} item as in the knapsack $i = i-1, k = k-w_i$

else

 $i = i-1$

Knapsack Problem: Dynamic Programming Approach (30)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

$i=n, k=W$

while ($i > 0$ and $k > 0$)

if ($V[i,k] \neq V[i-1,k]$)

mark the i^{th} item as in the knapsack

$i = i-1, k = k-w_i$

else

$i = i-1$

$i=1$

$k=2$

$b_i=3$

$w_i=2$

$V[i,k]=3$

$V[i-1,k]=0$

$k-w_i=0$

Items:

1: (2,3)

2: (3,4)

3: (4,5)

4: (5,6)

Knapsack Problem: Dynamic Programming Approach (31)

i\W	0	1	2	3	4	5
0	0	0	0	0	0	0
1	0	0	3	3	3	3
2	0	0	3	4	4	7
3	0	0	3	4	5	7
4	0	0	3	4	5	7

$i=0$
 $k=0$

Items:

- 1: (2,3)
- 2: (3,4)
- 3: (4,5)
- 4: (5,6)

The optimal
knapsack
should
contain {1,2}

$i=n, k=W$

while ($i > 0$ and $k > 0$)

if ($V[i,k] \neq V[i-1,k]$)

mark the i^{th} item as in the knapsack

$i = i-1, k = k-w_i$

else

$i = i-1$

Summary

We have discussed 3 algorithmic concepts:

1. **Divide & Conquer Method**

Splits problem into multiple subproblems, solves them recursively, and combines the solutions.

2. **Greedy Algorithms**

Makes a locally best choice to reduce the problem to a subproblem and iteratively solves the subproblem in the hope to find a globally best solution.

3. **Dynamic Programming**

Computes subproblems in a bottom-up fashion and stores (intermediate) solutions to subproblems in a table.