

MacRuby on Rails

Abstract

MacRuby is an implementation of Ruby 1.9 that is built directly on top of Mac OS X core technologies. Recently, MacRuby has become viable as a tool for developing useful desktop applications for Mac OS X. However, as of March 2011, MacRuby is still missing some functionality that is present in cRuby. Therefore, MacRuby is not able to run Ruby on Rails. In my presentation, I will explain how I modified MacRuby to make it a suitable foundation for running Rails. I would also like to explain some of the technical intricacies that I discovered along the way.



RubyConf 2011 - 2011/09/30
Network Applied Communication Laboratory Ltd.
Kouji Takaoka <kouji@netlab.jp>
[@takaokouji_en/takaokouji@facebook.com](http://takaokouji_en/takaokouji@facebook.com)
Illustrator: Yuki Morohoshi <morohoshi@netlab.jp>

This presentation was made possible by **NaCl**



Kouji Takao



Kouji Takao

❖ Work

- Network Applied Communication Laboratory Ltd.



Kouji Takao

❖ Work

- Network Applied Communication Laboratory Ltd.

❖ Hobby

- MacRuby committer
- cRuby committer (Readline module)



Kouji Takao

❖ Work

- Network Applied Communication Laboratory Ltd.

❖ Hobby

- MacRuby committer
- cRuby committer (Readline module)

❖ Contact Information

- kouji.takao@gmail.com
- [@takaokouji_en](https://twitter.com/takaokouji_en)
- <http://facebook.com/takaokouji> (mainly in Japanese)

My Company

My Company

- Network Applied Communication Laboratory Ltd.

My Company

- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl

My Company

- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl
- Information
 - <http://www.netlab.jp/> (only Japanese)

My Company

- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl
- Information
 - <http://www.netlab.jp/> (only Japanese)
 - Shimane, Japan

My Company

- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl
- Information
 - <http://www.netlab.jp/> (only Japanese)
 - Shimane, Japan
 - Since 2001 (My 10th Anniversary!)

My Company


- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl
- Information
 - <http://www.netlab.jp/> (only Japanese)
 - Shimane, Japan
 - Since 2001 (My 10th Anniversary!)
 - 57 people (many Rubyists!?)

My Company



- Network Applied Communication Laboratory Ltd.
 - a.k.a NaCl
- Information
 - <http://www.netlab.jp/> (only Japanese)
 - Shimane, Japan
 - Since 2001 (My 10th Anniversary!)
 - 57 people (many Rubyists!?)
 - SI, Training, etc...

The NaCl Way

The NaCl Way

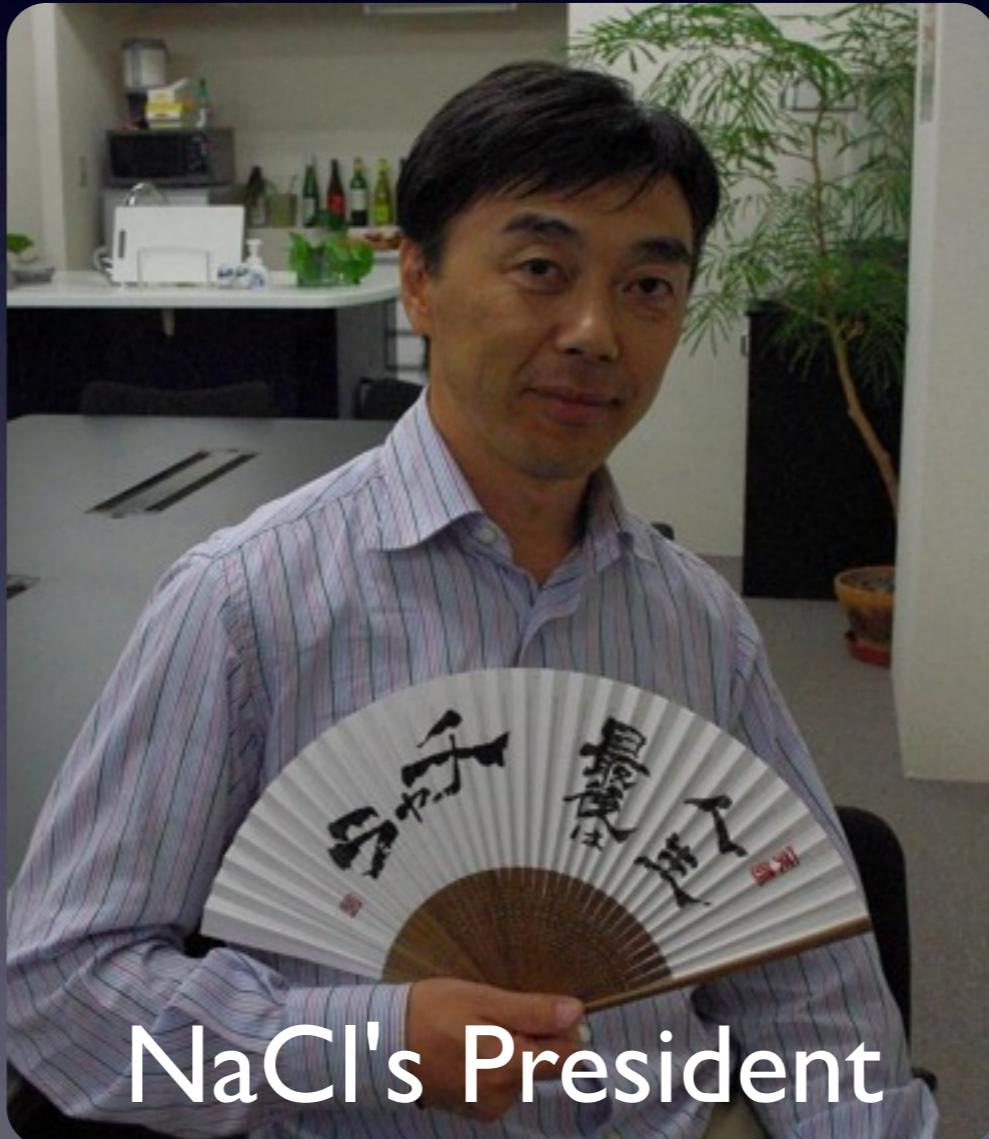

The NaCI Way

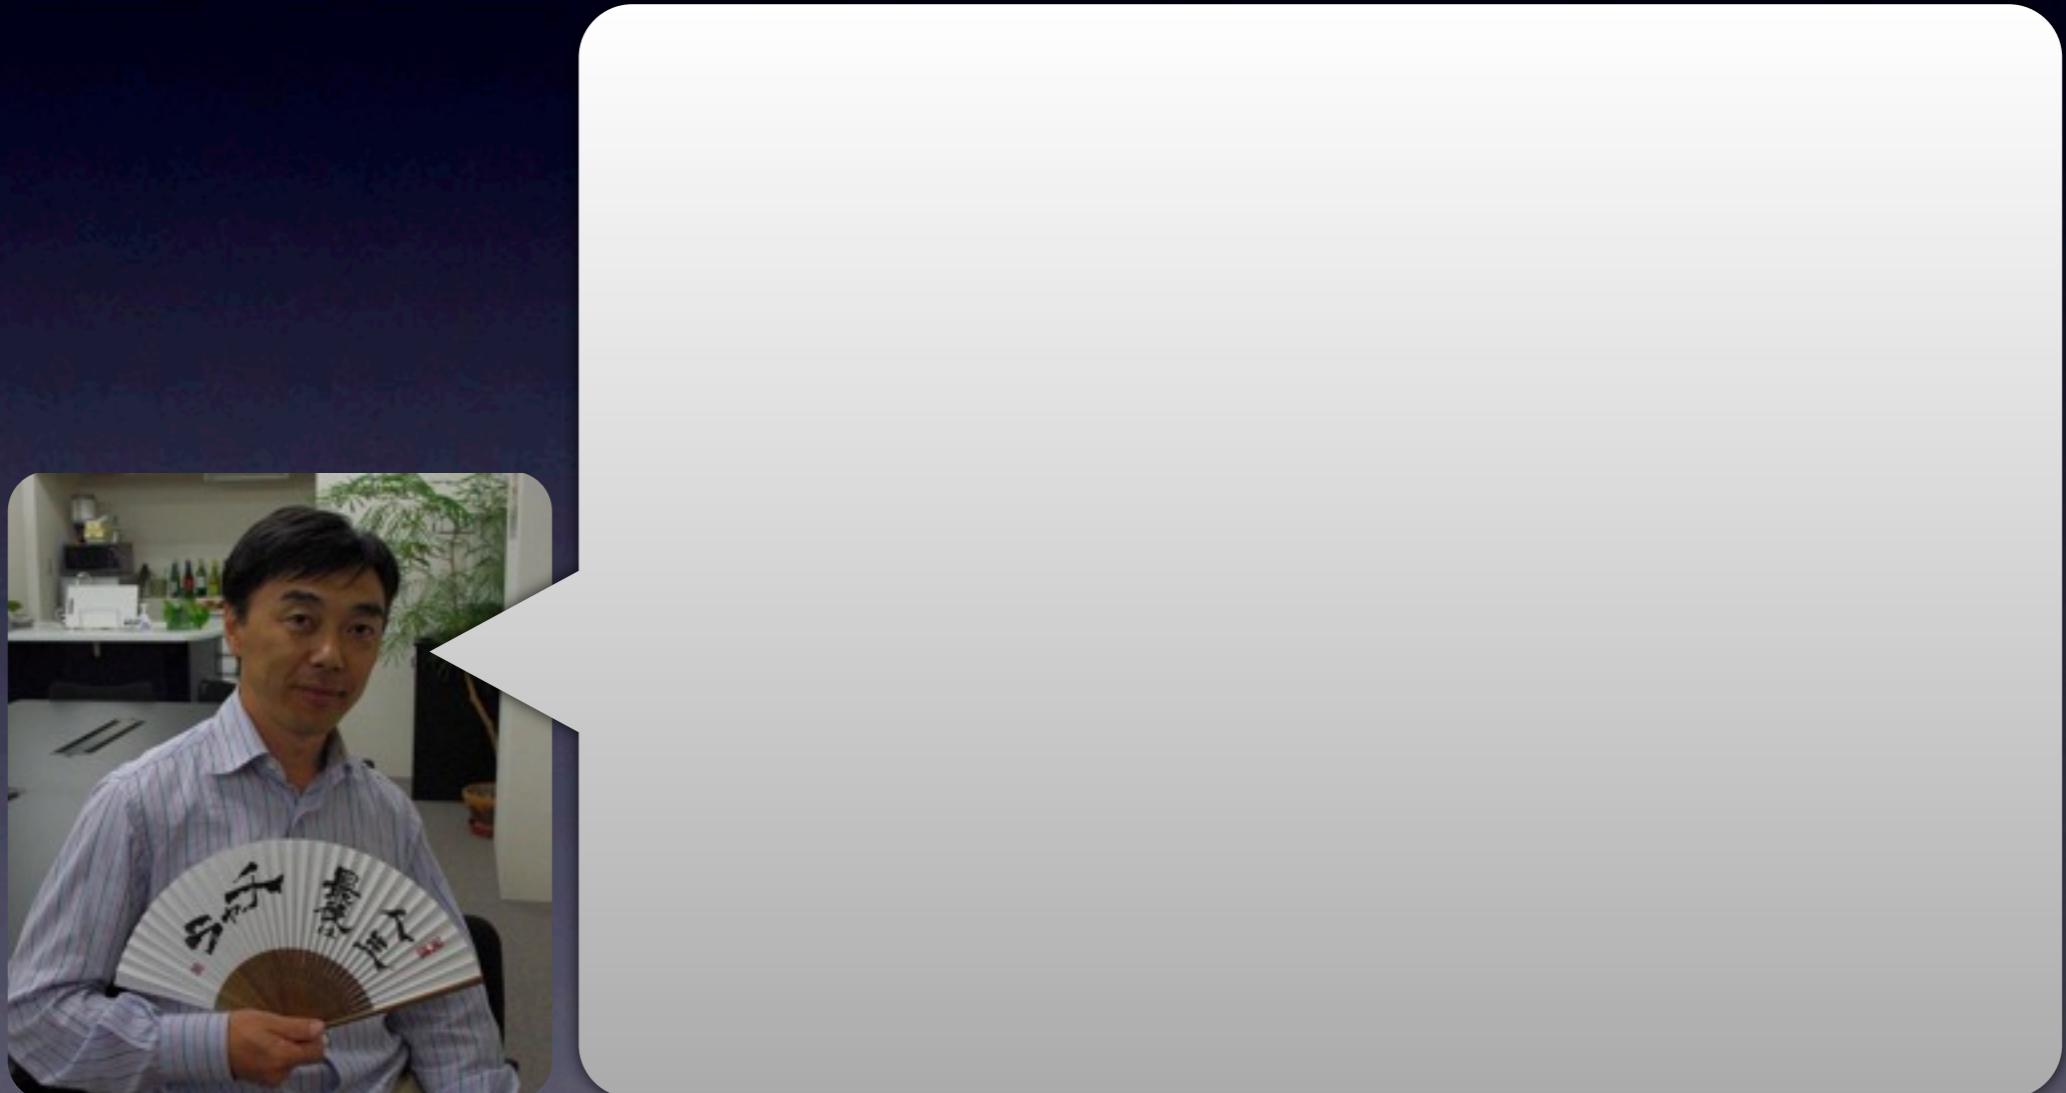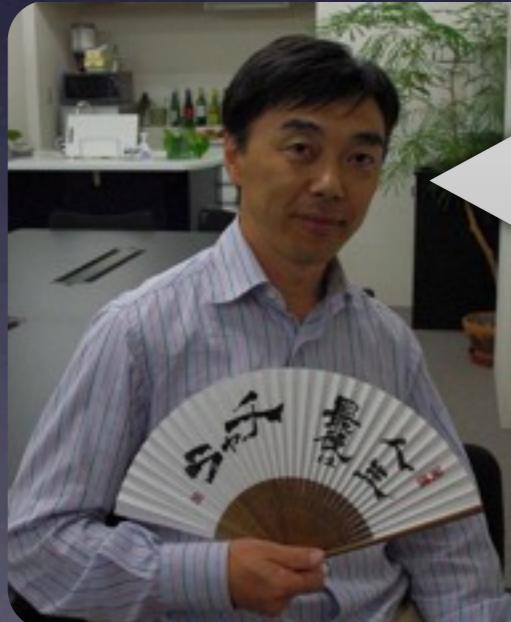

The NaCI Way

First, I want **You** to be happy.



The NaCI Way

First, I want **You** to be happy.

Next, I want you to make **Your Family** happy.



The NaCI Way

First, I want **You** to be happy.

Next, I want you to make **Your Family** happy.

Finally, if you have more happiness left, then please share it with **Our Company** :)



The NaCI Way

(as I see it)

The NaCI Way

(as I see it)

Employee

- First: Employee

The NaCI Way

(as I see it)

Employee

>

Employee's
Family

- First: Employee
- Next: Employee Family

The NaCI Way

(as I see it)

Employee > Employee's Family >> Company

- First: Employee
- Next: Employee Family
- Finally: Company

The NaCI Way

(as I see it)

Employee

I love my
company!!

-

-

-



MacRuby on Rails

RubyConf 2011 – 2011/09/30
Network Applied Communication Laboratory Ltd.
Kouji Takaoka <kouji@netlab.jp>
[@takaokouji_en/takaokouji@facebook.com](https://takaokouji_en/takaokouji@facebook.com)
Illustrator: Yuki Morohoshi <morohoshi@netlab.jp>



MacRuby Unofficial Character
Ruby Ninja @lrz

MacRuby on Rails

RubyConf 2011 - 2011/09/30
NetLab Applied Communication Laboratory Ltd.
Ko Takaoka <kouji@netlab.jp>
<[takaokouji@facebook.com](https://www.facebook.com/takaokouji)>
Illustration: Koki Morohoshi <morohoshi@netlab.jp>

MacRuby

Ruby customized for Mac OS X



MacRuby



MacRuby

- MacRuby is a unique blend of Ruby 1.9 and Objective-C.




MacRuby

- MacRuby is a unique **blend of Ruby 1.9 and Objective-C**.
- The goal of the MacRuby project is to be **100% compatible** syntactically and behaviorally with Ruby 1.9.




Ruby 1.9

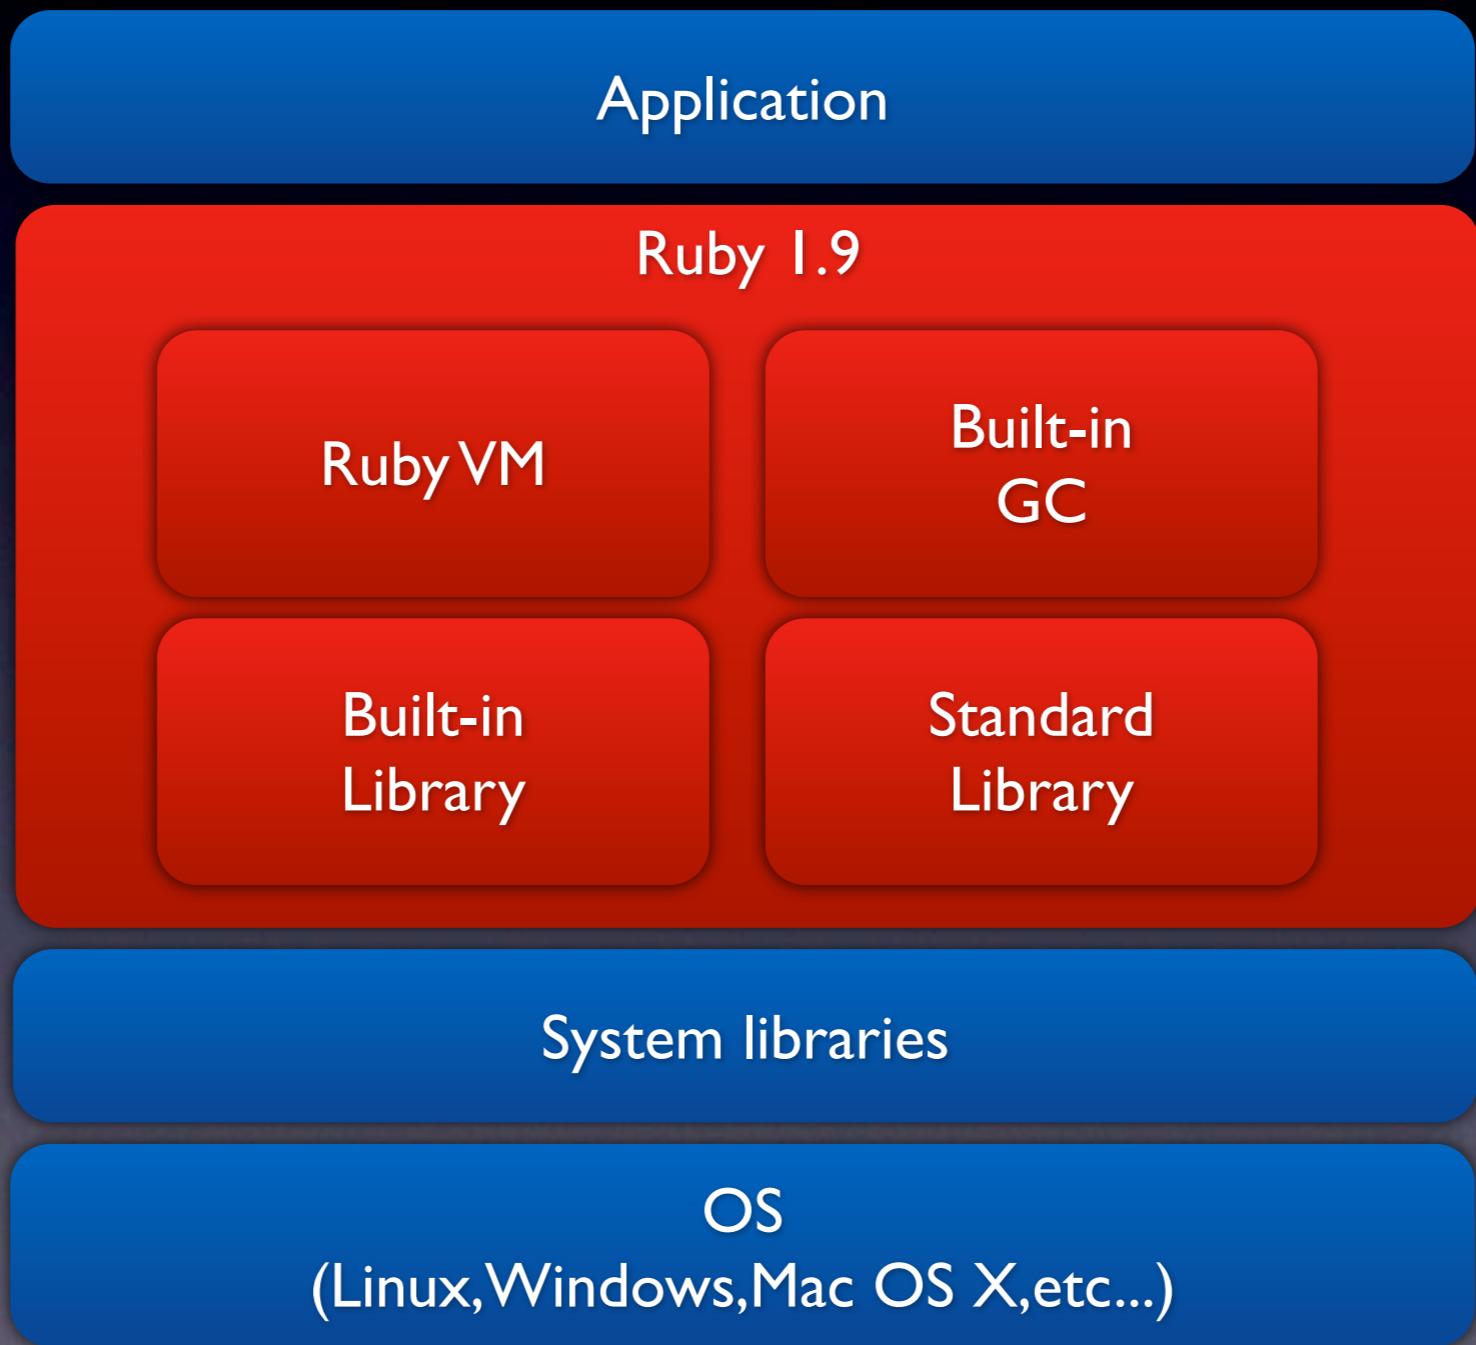


MacRuby




MacRuby

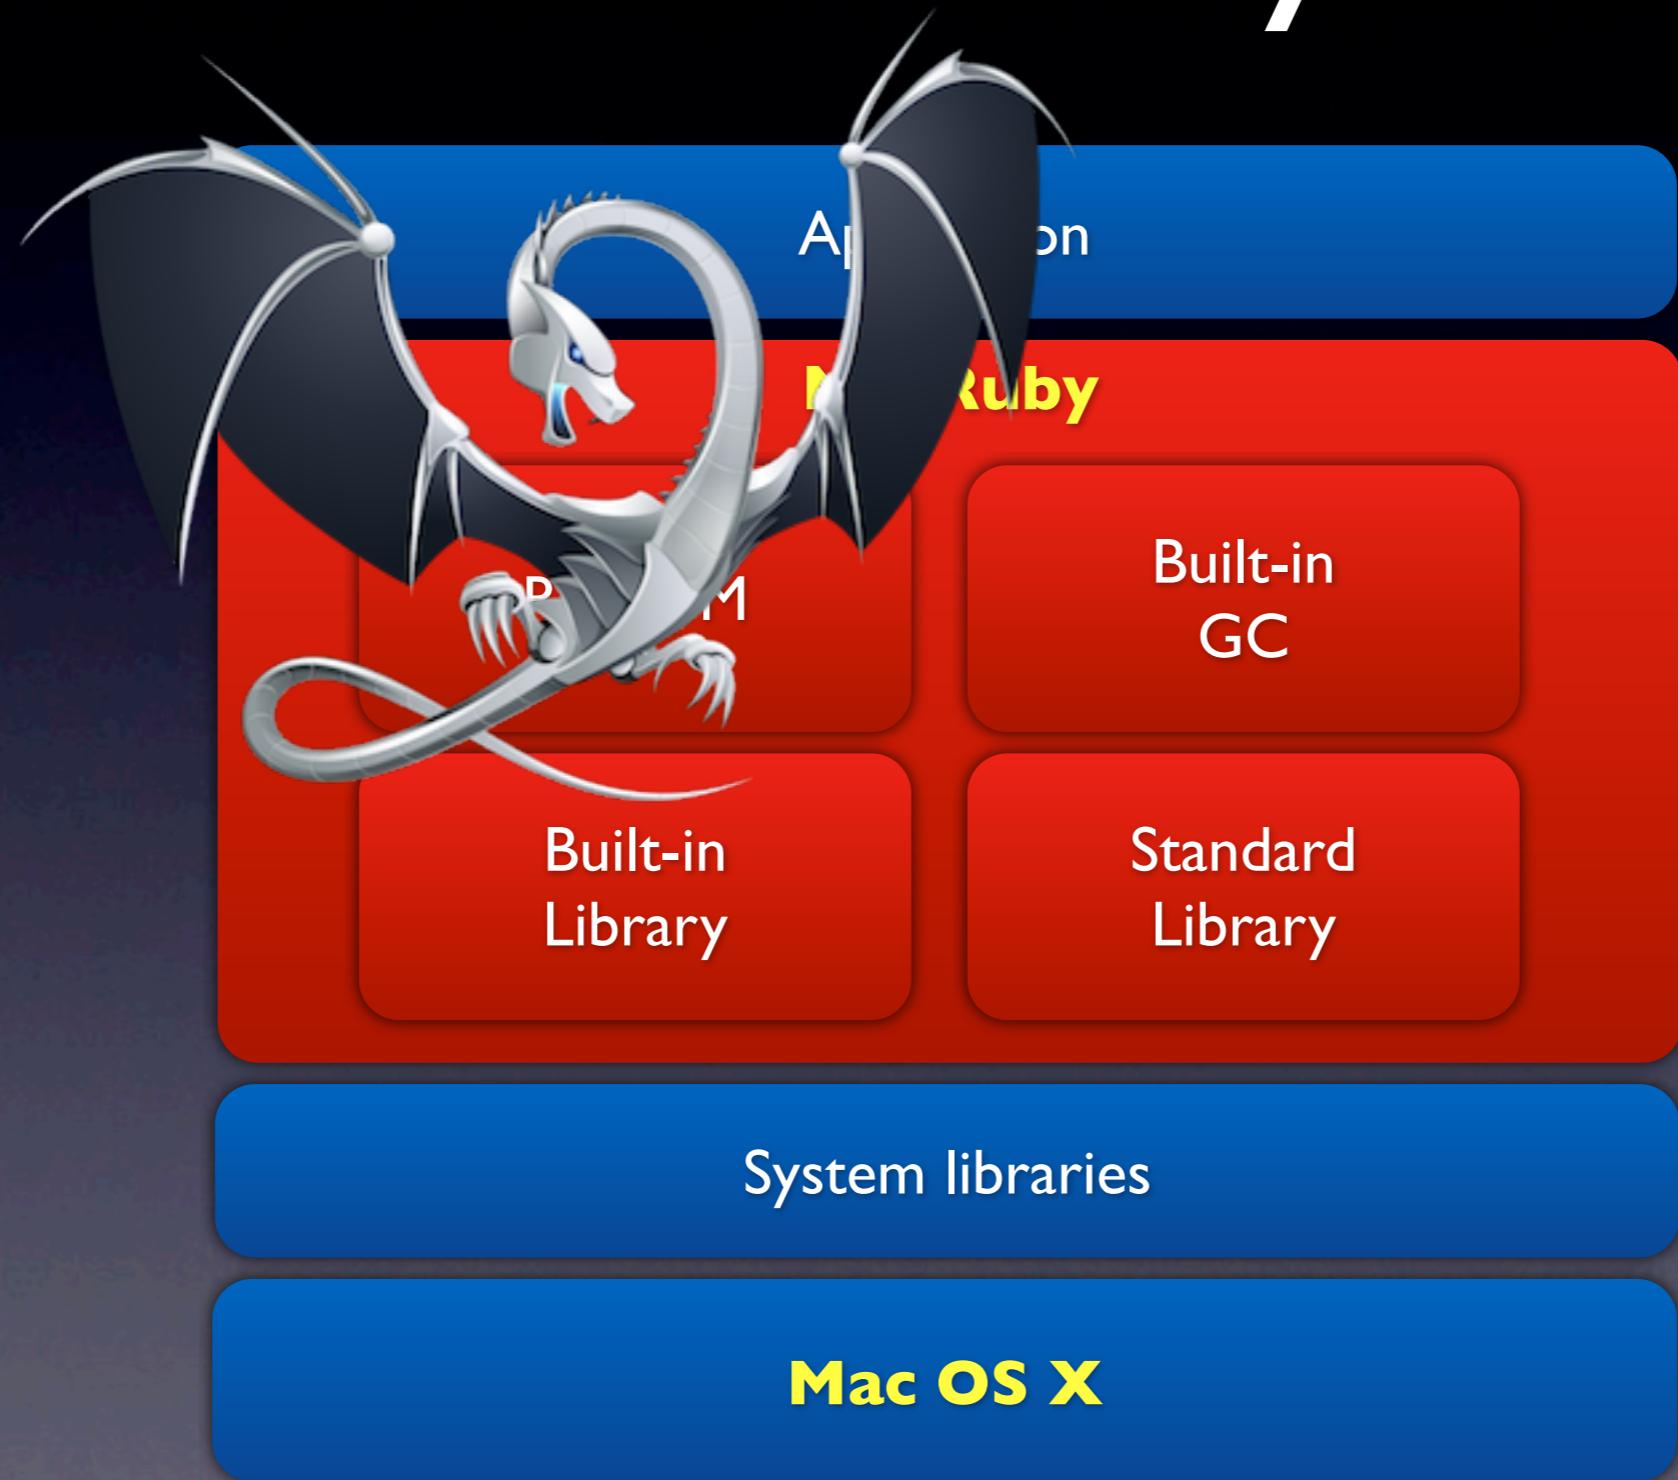

MacRuby

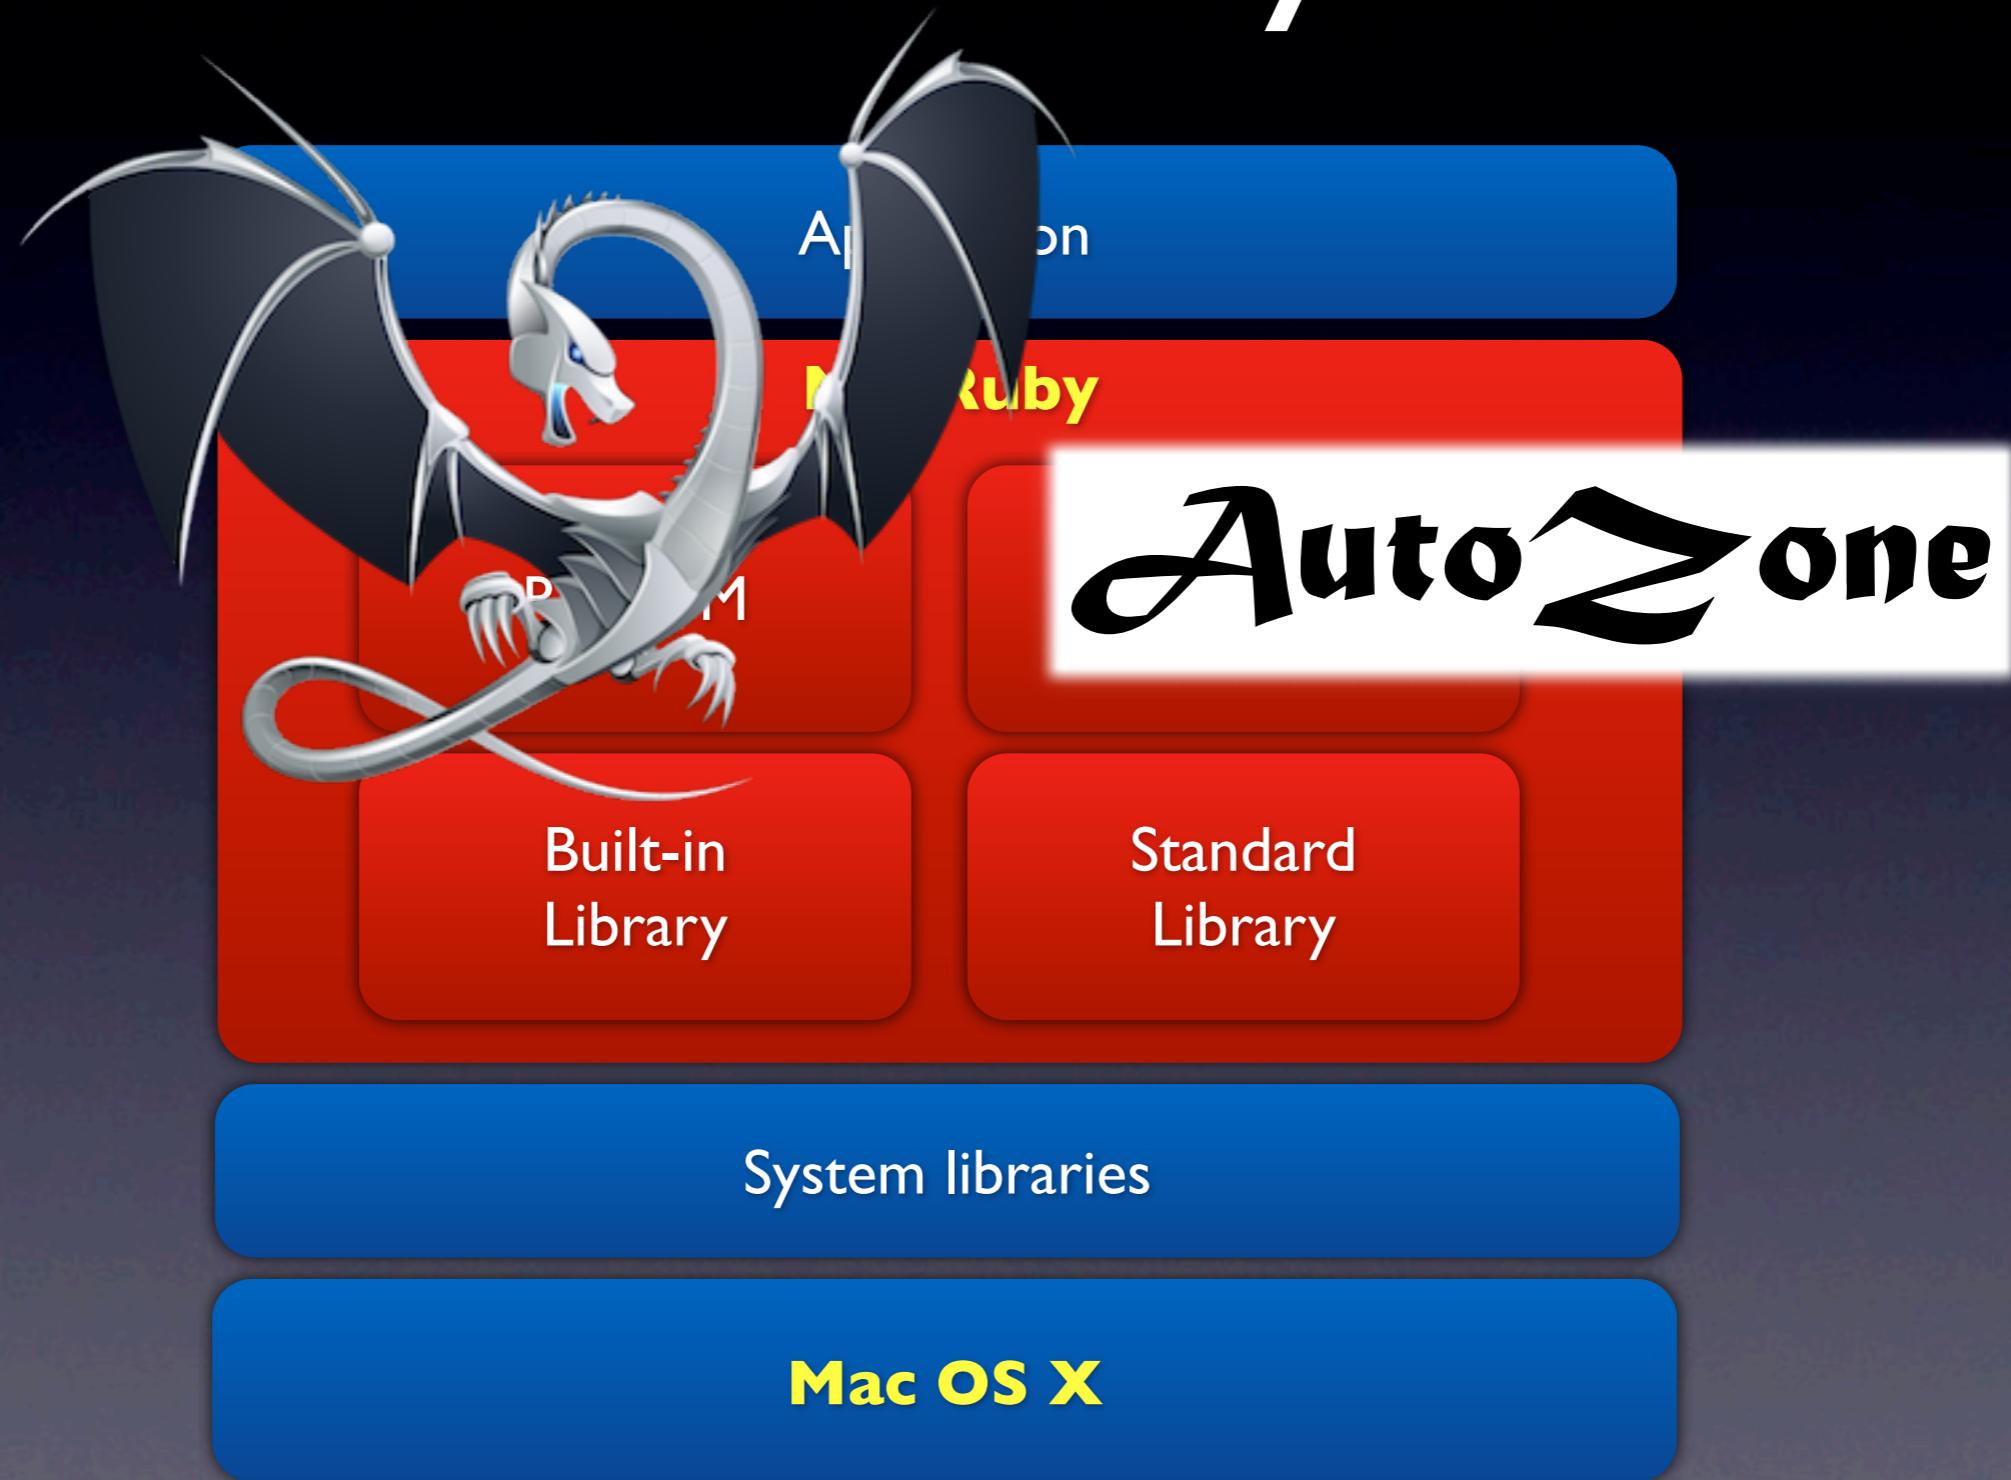

MacRuby

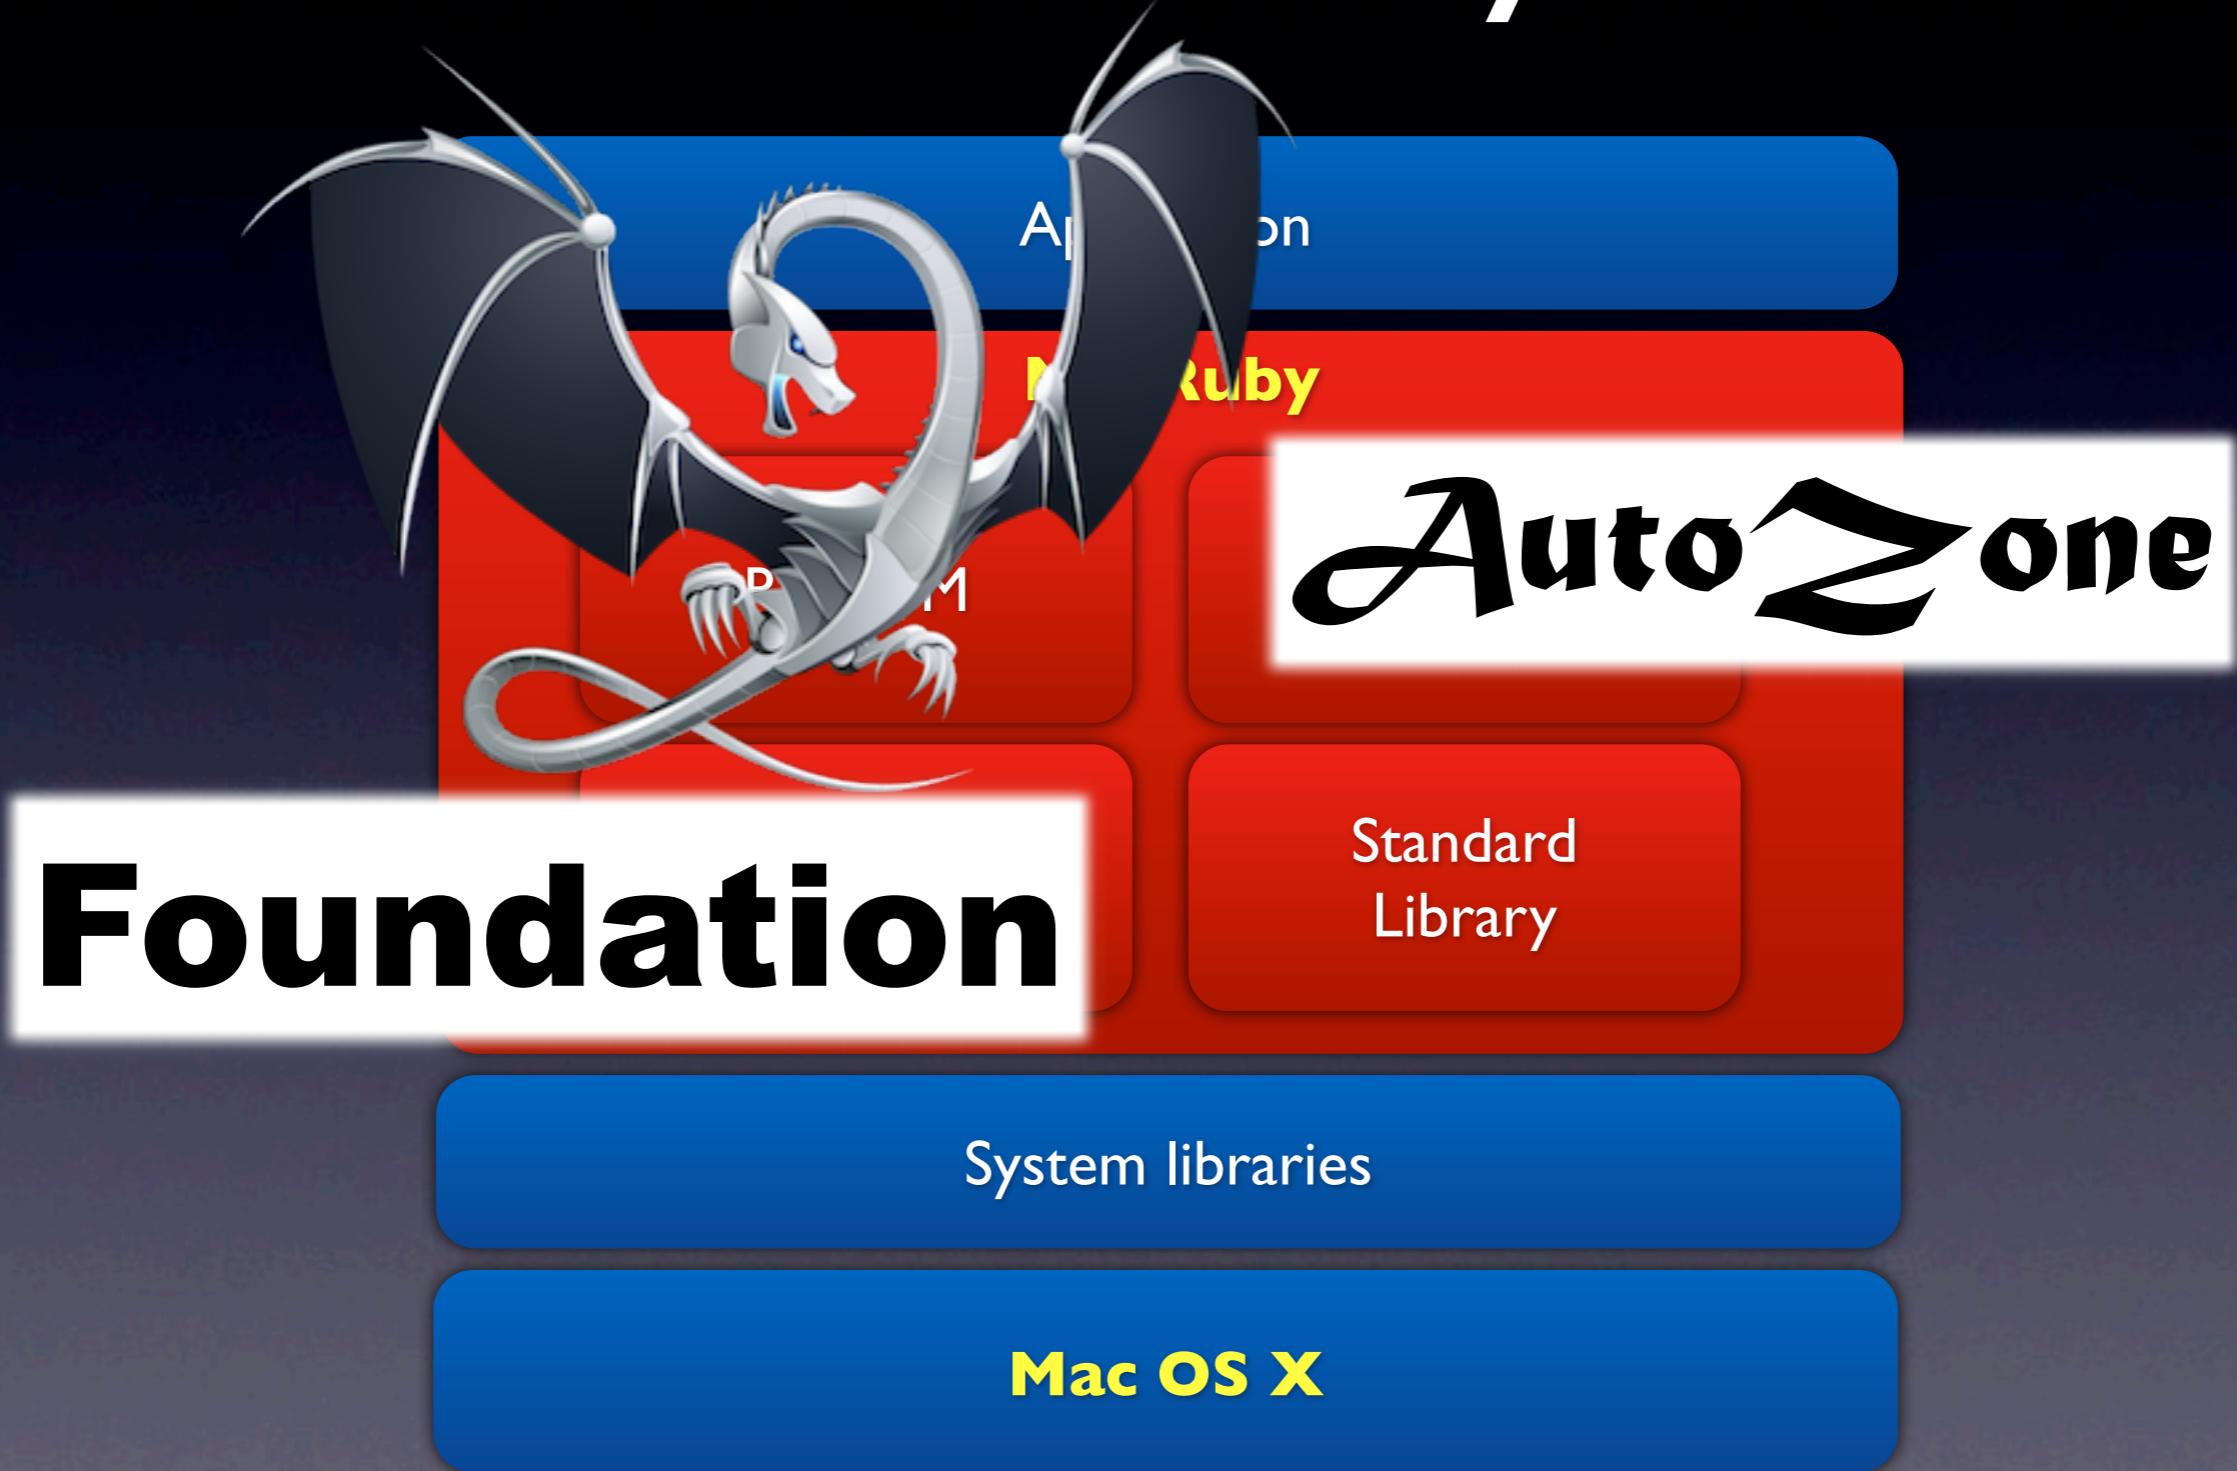


MacRuby




Foundation

```
"kouji".transform("latin-hiragana")  
#=> こうじ
```


MacRuby

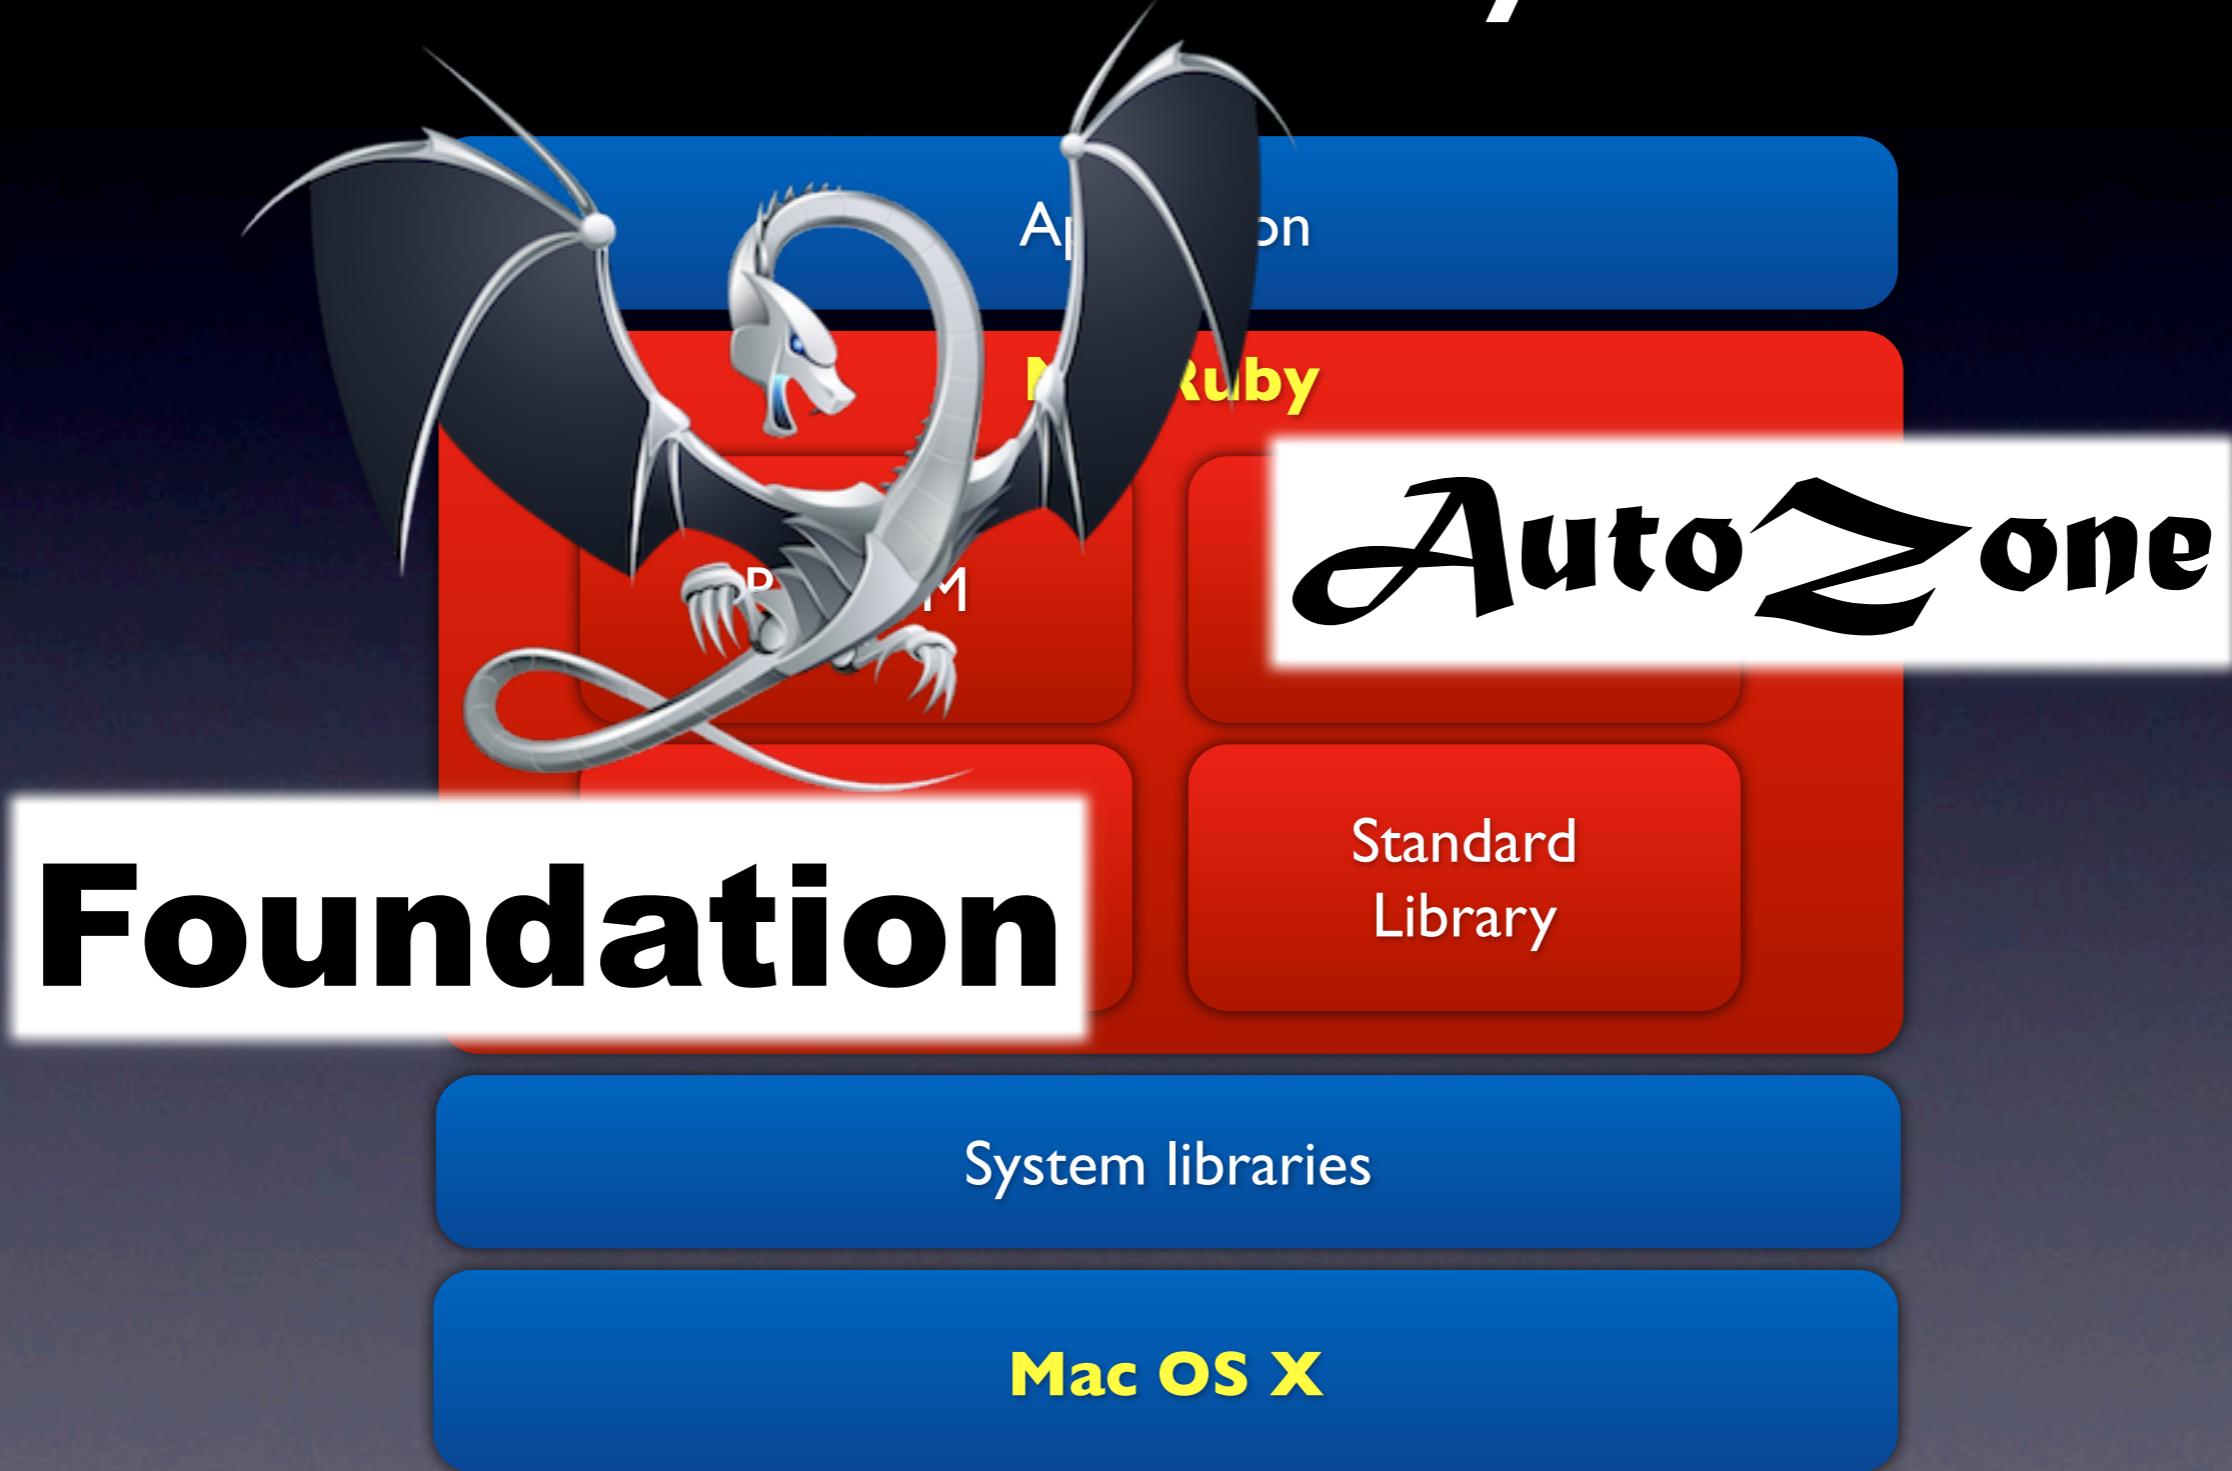


MacRuby

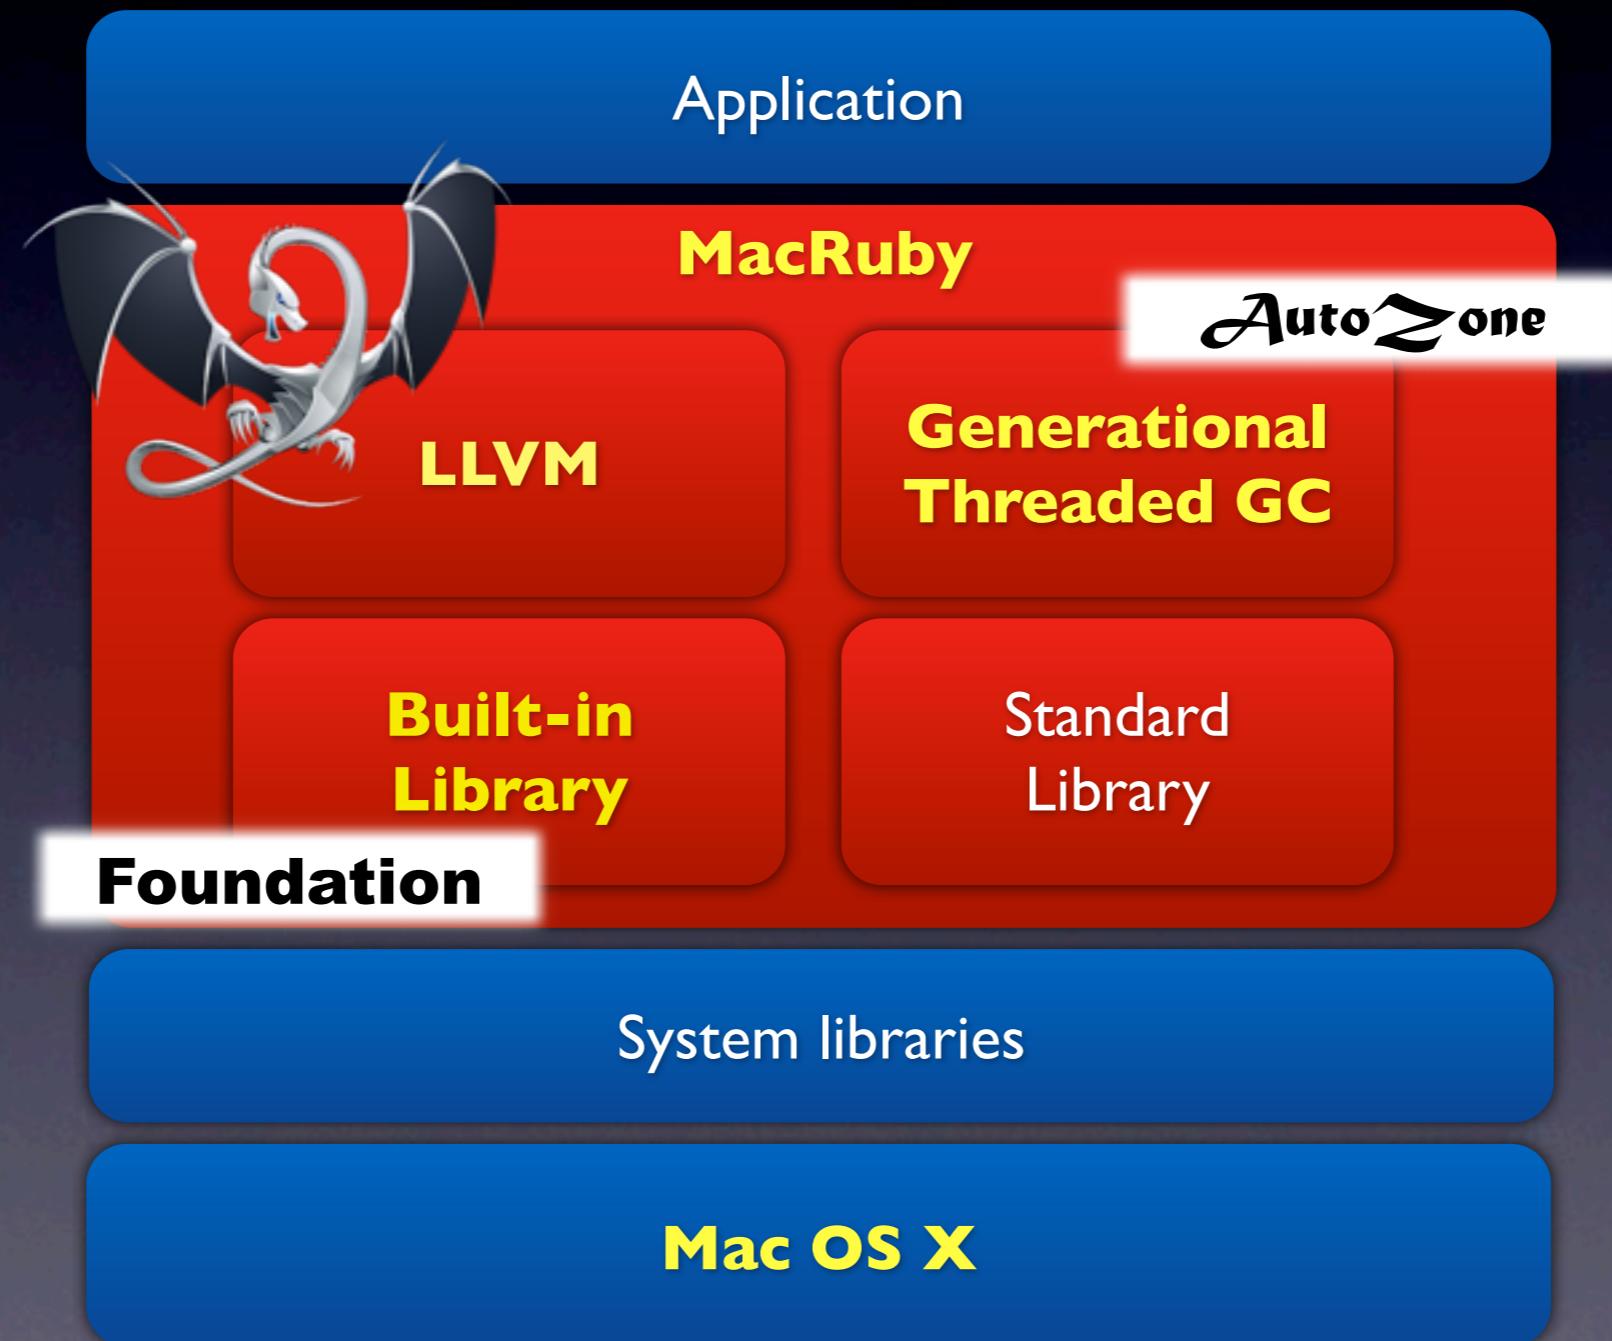

Cocoa

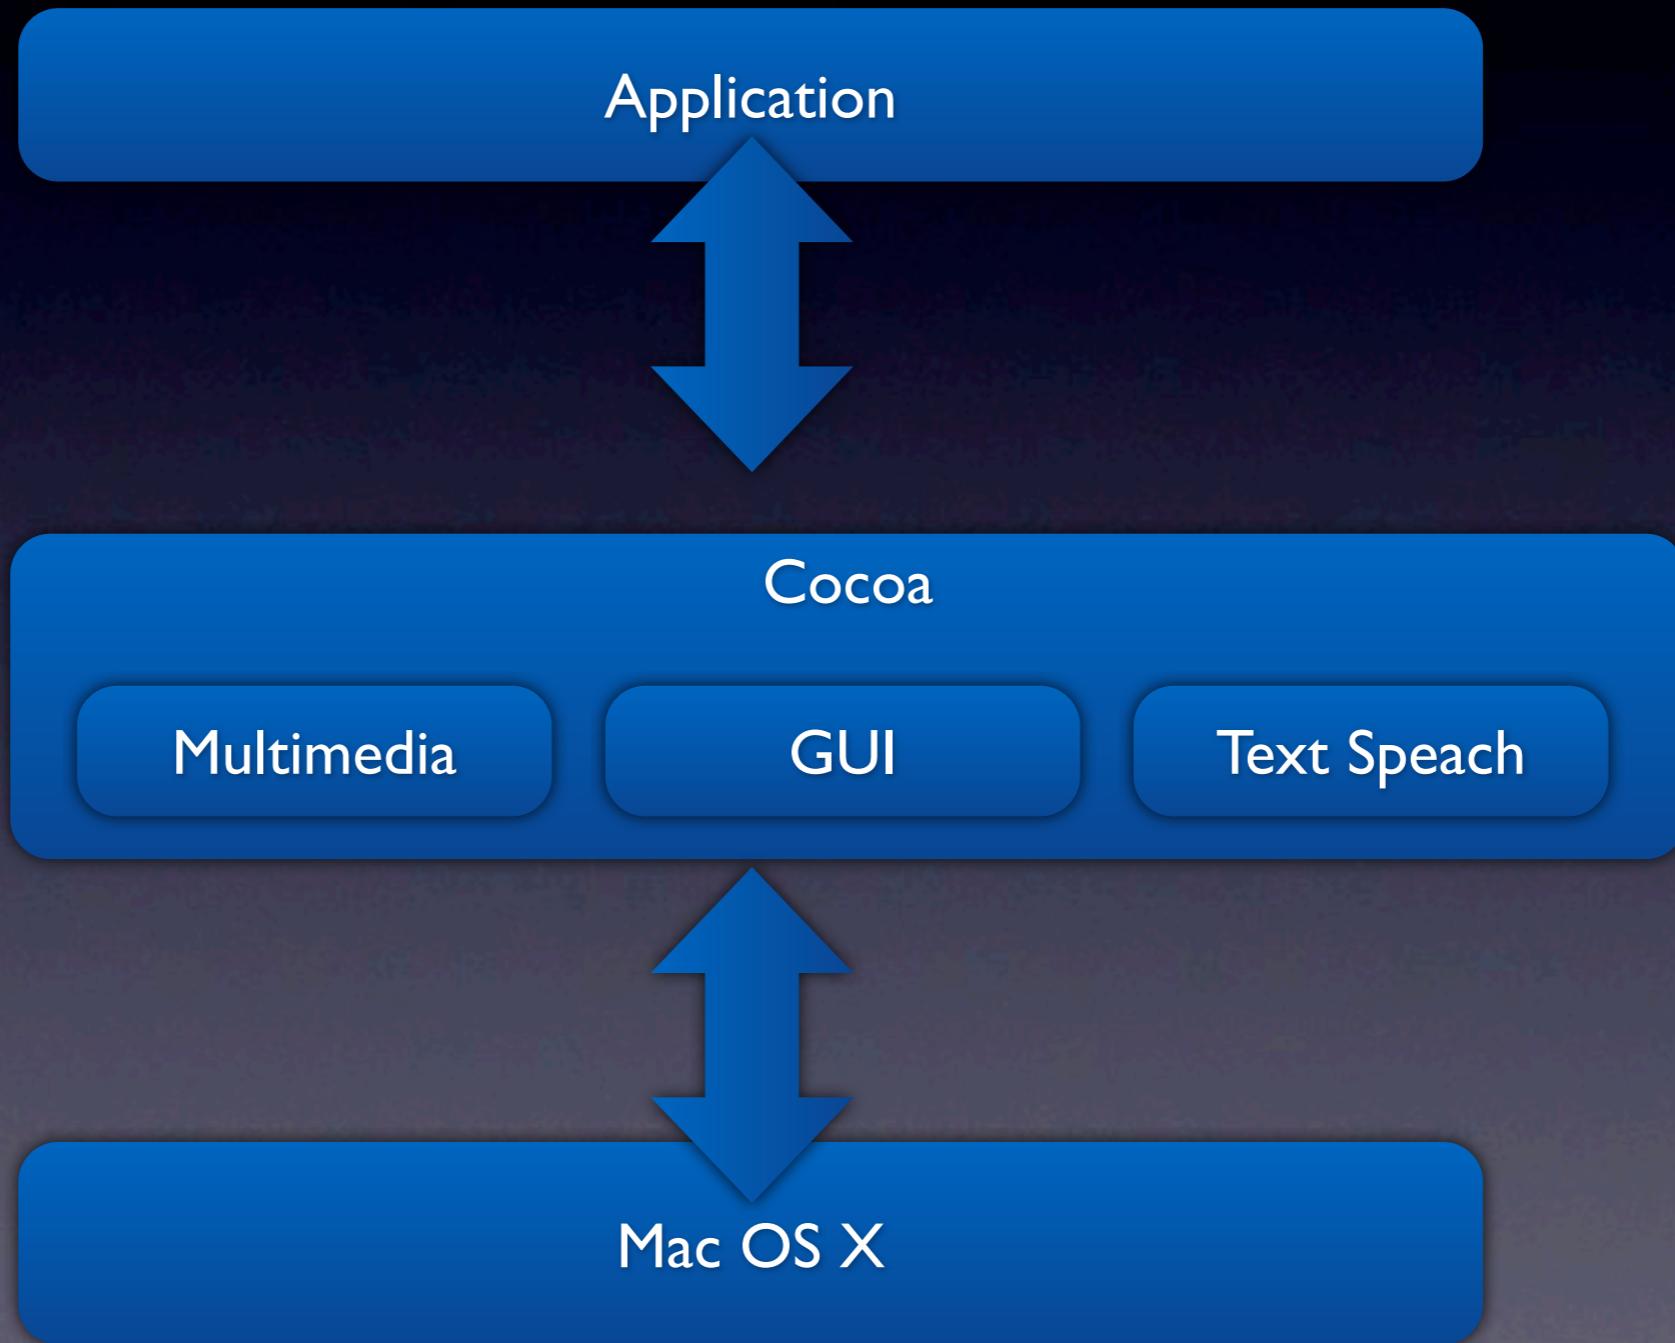

MacRuby X Cocoa

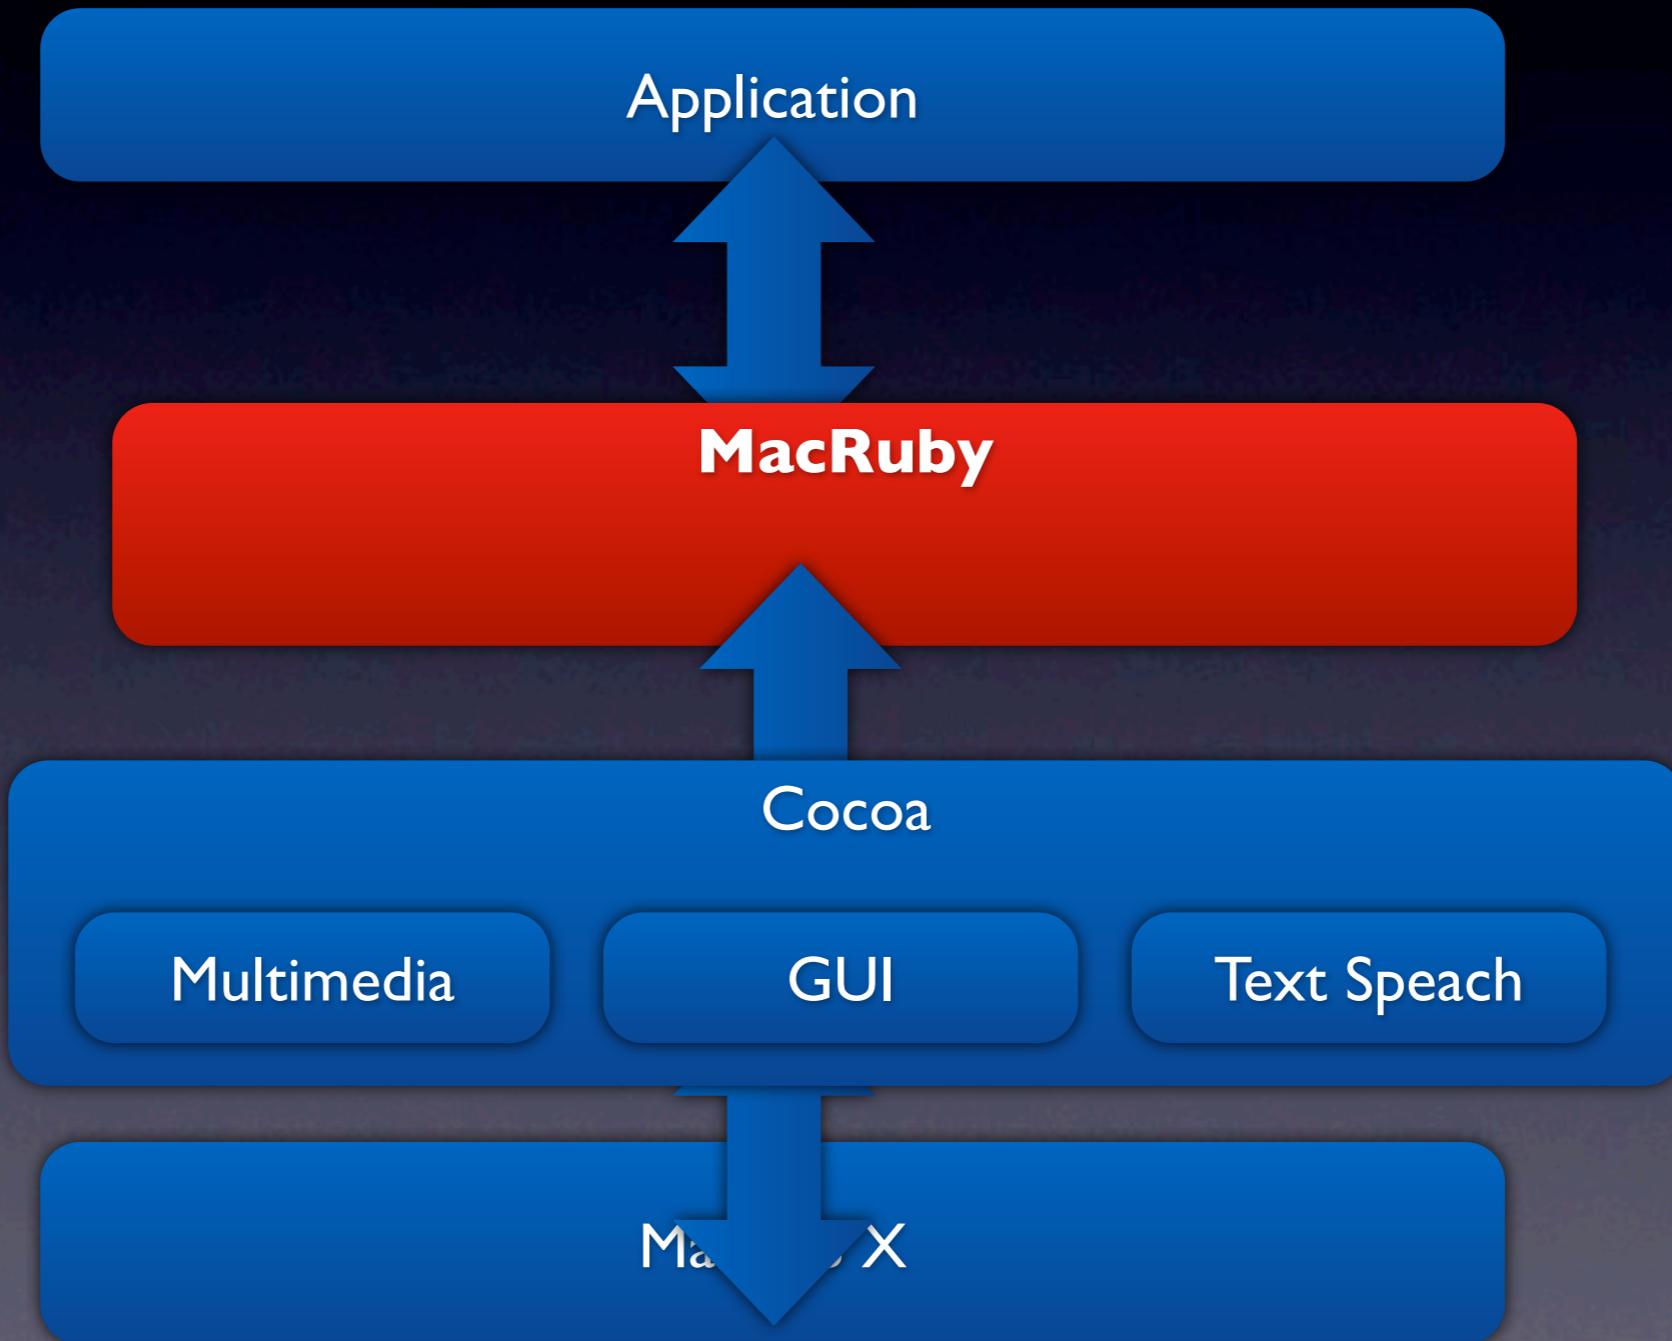

MacRuby X Cocoa

```
framework "cocoa"

def playSound(name)
    sound = NSSound.soundNamed(name)
    sound.play
end
```


MacRuby X Cocoa

This is a sample program that plays a sound.


```
framework "cocoa"

def playSound(name)
    sound = NSSound.soundNamed(name)
    sound.play
end
```


HelloMacRuby

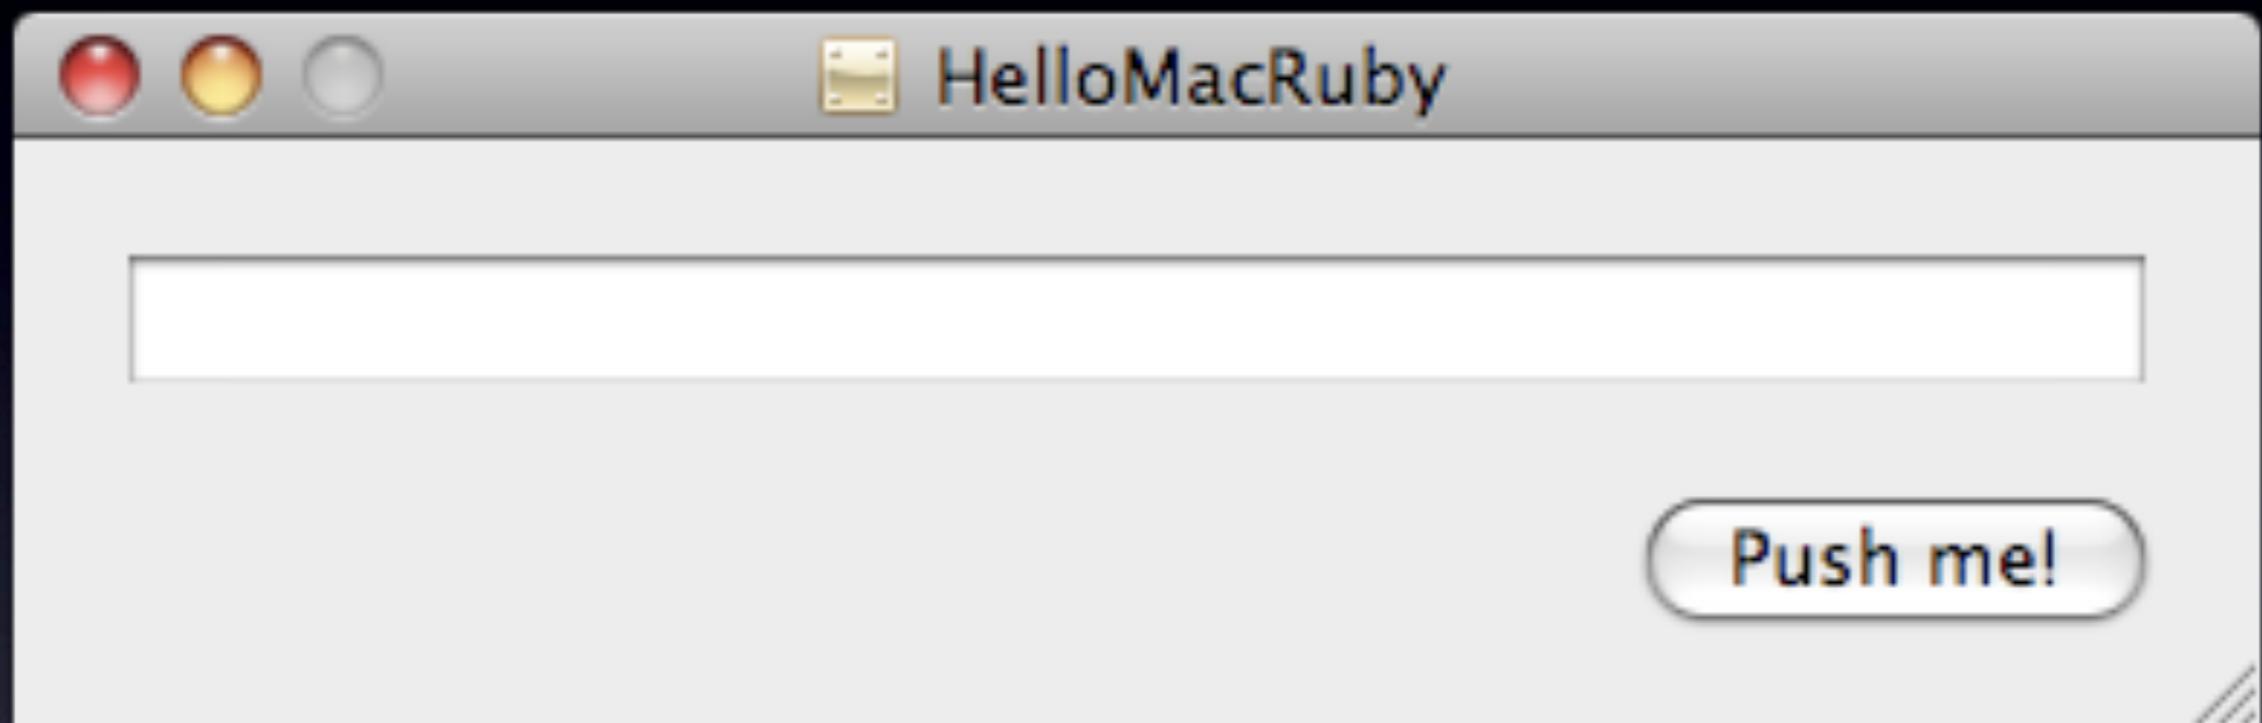

HelloMacRuby

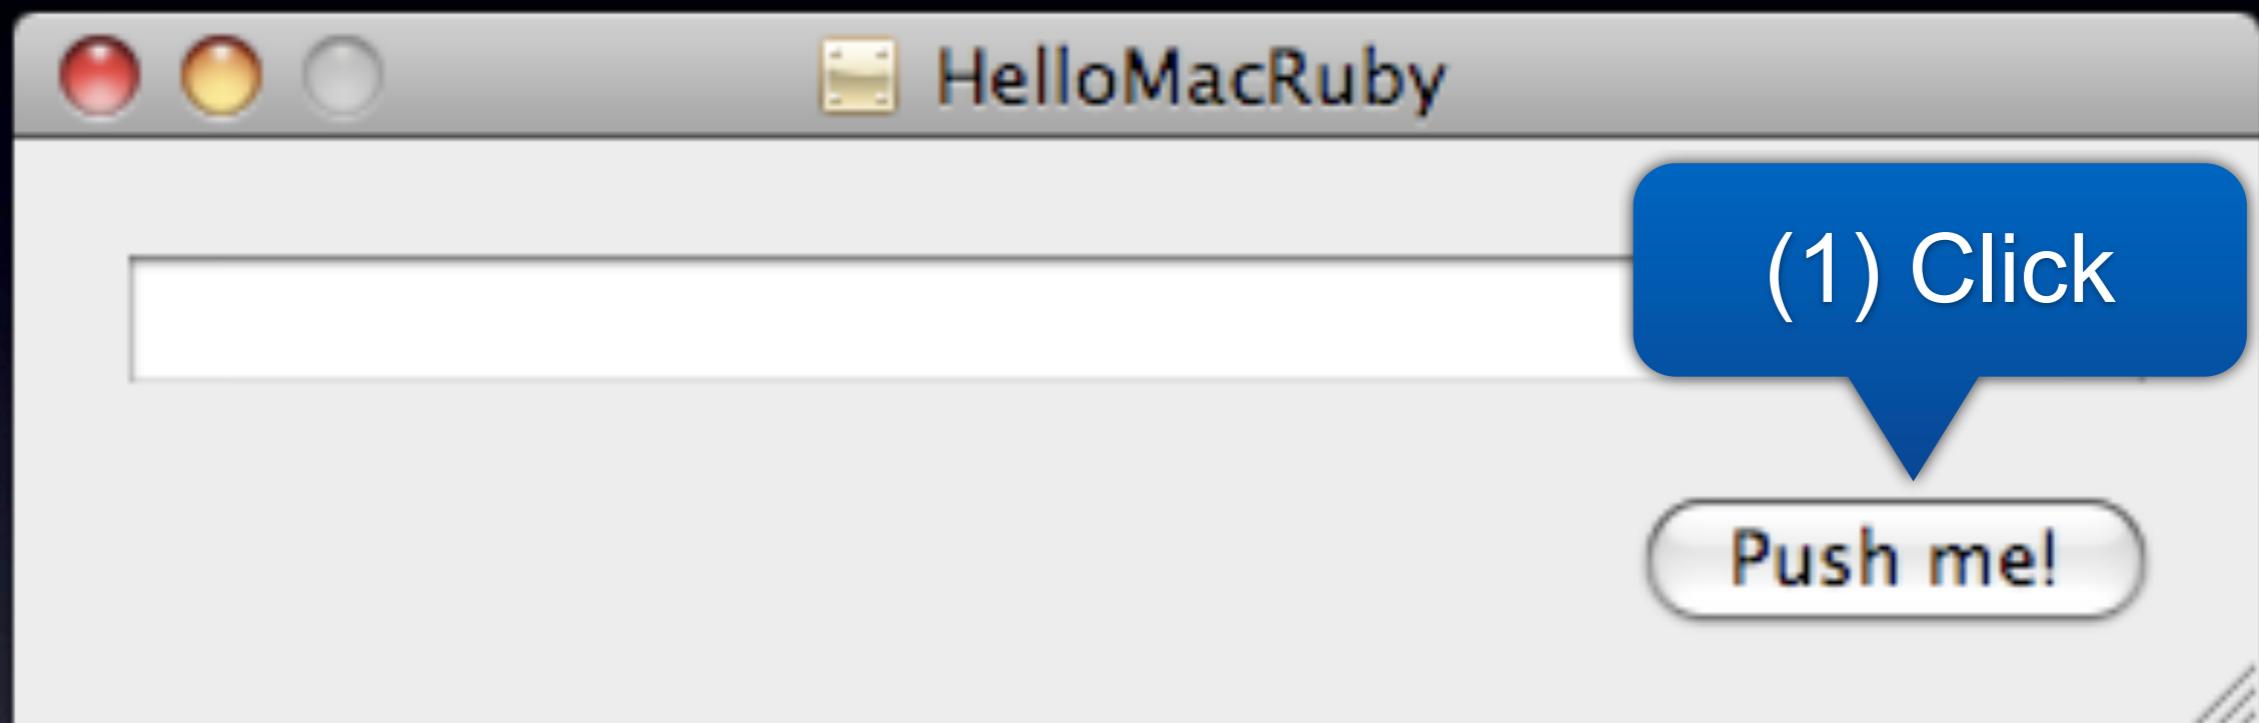


HelloMacRuby

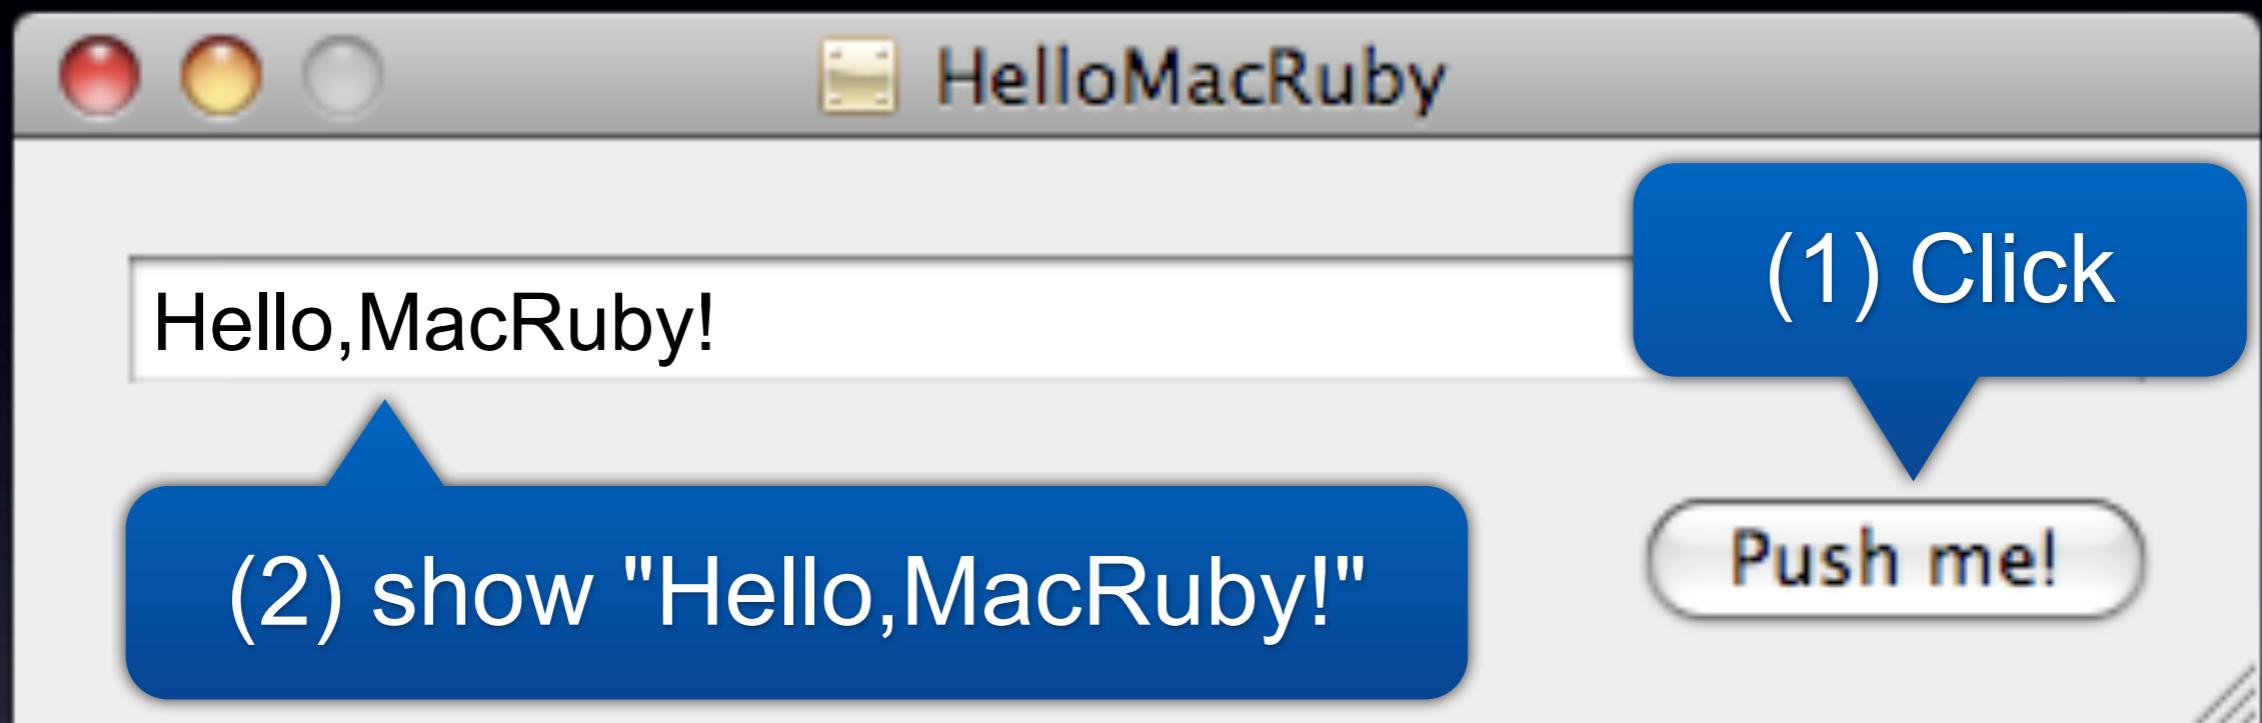

HelloMacRuby

Ruby script: Controller


```
1: class AppController
2:   attr_accessor :textField
3:
4:   def hello(sender)
5:     @textField.stringValue = "Hello, MacRuby!"
6:   end
7: end
```

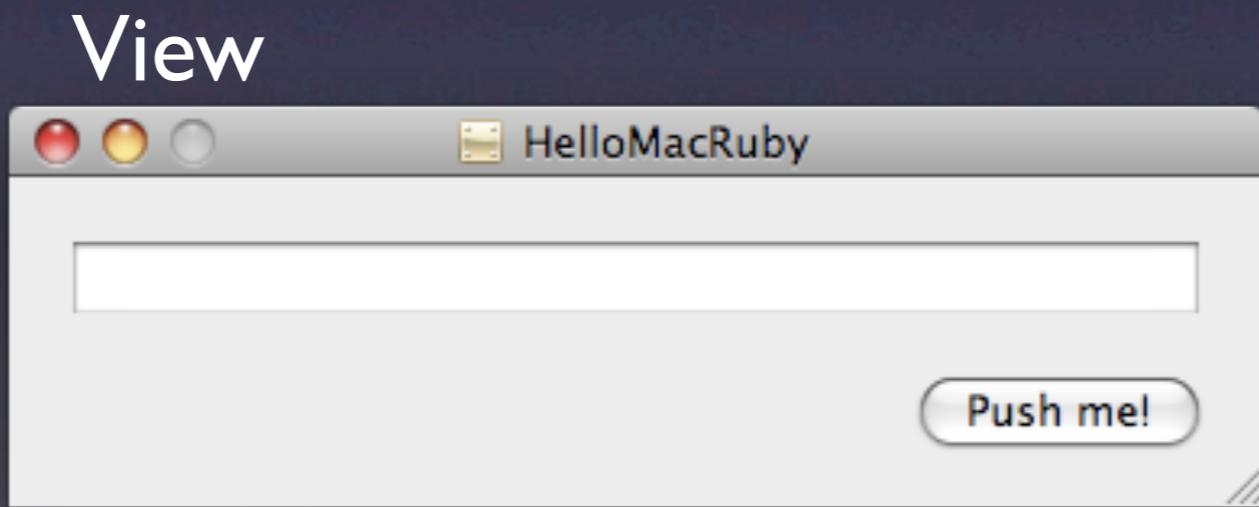

HelloMacRuby

Ruby script: Controller


```
1: class AppController
2:   attr_accessor :textField
3:
4:   def hello(sender)
5:     @textField.stringValue = "Hello, MacRuby!"
6:   end
7: end
```

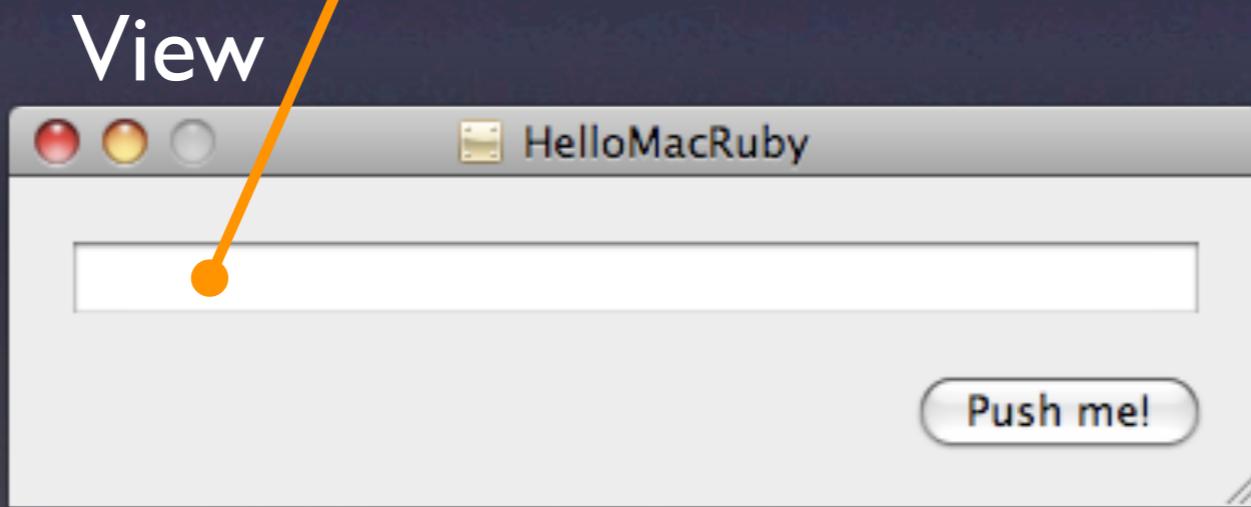

HelloMacRuby

Ruby script: Controller

```
1: class AppController
2:   attr_accessor :textField
3:
4:   def hello(sender)
5:     @textField.stringValue = "Hello, MacRuby!"
6:   end
7: end
```

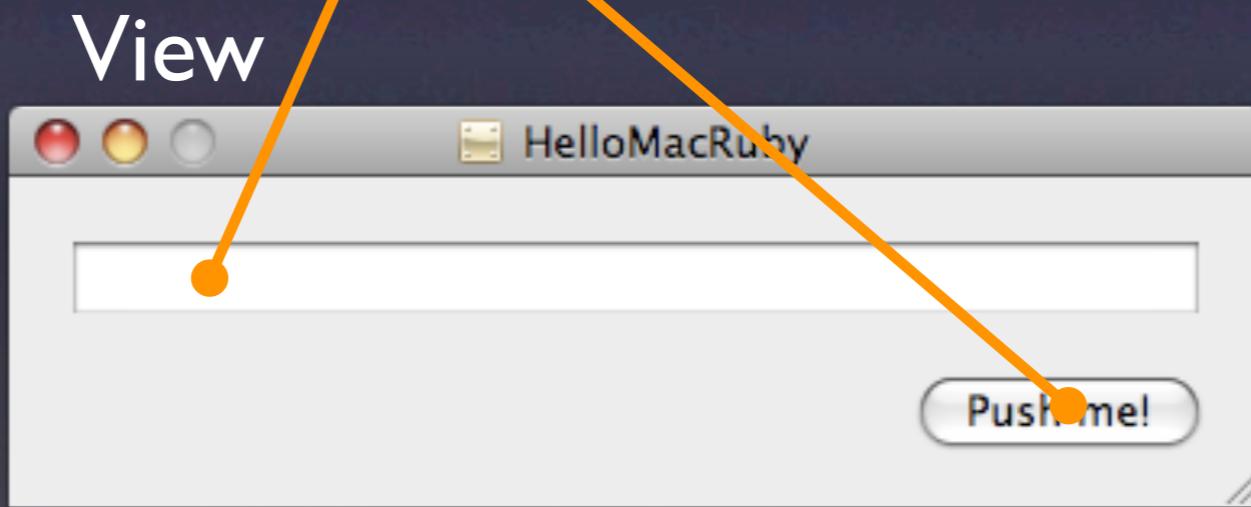

MacRuby on Rails

Making Ruby on Rails work on MacRuby



Current Status



Current Status

```
$ rails new demo  
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work:0  
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails new demo  
create README  
create Rakefile  
create config.ru  
create .gitignore  
create Gemfile  
create app  
create app/controllers/application_controller.rb  
create app/helpers/application_helper.rb  
create app/mailers  
create app/models  
create app/views/layouts/application.html.erb  
create config  
create config/routes.rb  
create config/application.rb  
create config/environment.rb  
create config/environments  
create config/environments/development.rb  
create config/environments/production.rb  
create config/environments/test.rb  
create config/initializers  
create config/initializers/backtrace_silencers.rb
```



Current Status

```
$ rails new demo
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails new demo
create
create README
create Rakefile
create config.ru
create .gitignore
create Gemfile
create app
create app/controllers
create app/models
create app/views
create app/controllers/bookmarks_controller.rb
create config/routes.rb
create config/application.rb
create config/environments
create config/initializers
create config/locales
create db/migrate
create lib
create test/unit
create test/fixtures
create test/test_helper.rb
create test/unit/bookmark_test.rb
create test/fixtures/bookmarks.yml
create routes :bookmarks
invoke scaffold_controller
create app/controllers/bookmarks_controller.rb
invoke erb
create app/views/bookmarks
create app/views/bookmarks/index.html.erb
create app/views/bookmarks/edit.html.erb
create app/views/bookmarks/show.html.erb
create app/views/bookmarks/new.html.erb
create app/views/bookmarks/_form.html.erb
invoke test_unit
create test/functional/bookmarks_controller_test.rb
invoke helper
create app/helpers/bookmarks_helper.rb
invoke test_unit

$ rails generate scaffold ...
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work/demo:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails generate scaffold Bookmark title:
string description:text url:string
invoke active_record
create db/migrate/20110714234202_create_bookmarks.rb
create app/models/bookmark.rb
invoke test_unit
create test/unit/bookmark_test.rb
create test/fixtures/bookmarks.yml
route resources :bookmarks
scaffold_controller
create app/controllers/bookmarks_controller.rb
erb
create app/views/bookmarks
create app/views/bookmarks/index.html.erb
create app/views/bookmarks/edit.html.erb
create app/views/bookmarks/show.html.erb
create app/views/bookmarks/new.html.erb
create app/views/bookmarks/_form.html.erb
test_unit
create test/functional/bookmarks_controller_test.rb
helper
create app/helpers/bookmarks_helper.rb
test_unit
```



Current Status

```
$ rails new demo
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails new demo
create
create README
create Rakefile
create config.ru
create .gitignore
create Gemfile
create app
create app/controllers
create app/models
create app/views
create config
create config/database.yml
create config/routes.rb
create config/application.rb
create config/environments
create config/initializers
create config/locales
create config/boot.rb
create config/unicorn.rb
create config/development.rb
create config/test.rb
create config/production.rb
create config/secrets.yml
create db
create db/migrate/20110714234202_create_bookmarks.rb
create app/models/bookmark.rb
create test/unit/bookmark_test.rb
create test/integration/bookmarks_controller_test.rb
create lib
create lib/tasks
create lib/assets
create lib/assets/javascripts
create lib/assets/stylesheets
create lib/assets/images
create lib/assets/fonts
create lib/assets/manifests
create lib/assets/c pre
$ rails generate scaffold Bookmark title:string description:text url:string
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work/demo:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails generate scaffold Bookmark title:string description:text url:string
create
create db/migrate/20110714234202_create_bookmarks.rb
create app/models/bookmark.rb
create test/unit/bookmark_test.rb
create test/integration/bookmarks_controller_test.rb
$ rails server
uby - 80x24
Last login: Wed Jul 13 10:42:18 on ttys011
kouji:/Users/kouji:0
dhcp219$ cd /Users/kouji/work/MacRuby/MacRuby/issues/work/demo
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work/demo:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails server
=> Booting WEBrick
=> Rails 3.0.7 application starting in development on http://0.0.0.0:3000
=> Call with -d to detach
=> Ctrl-C to shutdown server
[2011-07-15 08:32:52] INFO  WEBrick 1.3.1
[2011-07-15 08:32:52] INFO  ruby 1.9.2 (2008-06-03) [universal-darwin10.0]
[2011-07-15 08:32:52] INFO  WEBrick::HTTPServer#start: pid=20943 port=3000
```



Current Status

\$ rails new demo


```
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails new demo
create
create README
create Rakefile
create config.ru
.create .gitignore
Gemfile
app
app/controllers
create app/models
config config.ru
config routes.rb
create config/database.yml
create config/application.rb
create config/environments
create config/initializers
create config/locales
create config/routes.rb
create config/unicorn.rb
create config/unicorn-worker-killer.rb
create config/webpacker.yml
config/routes.rb
create db/migrate/20110714234202_create_bookmarks.rb
app/models/bookmark.rb
test/unit
create test/unit
app/views
create test/integration
config/test
test/integration
create test/integration
app/assets
config/assets
config/assets
config/assets
create test/integration
test/integration
config/assets
create test/integration
```

\$ rails generate scaffold Bookmarks

```
string description:text url:string
invoke active_record
create db/migrate/20110714234202_create_bookmarks.rb
create app/models/bookmark.rb
test/unit
create route
create route
invoke scaffold
create db/migrate/20110714234202_create_bookmarks.rb
create app/controllers/bookmarks_controller.rb
create config/routes.rb
create test/integration
create test/integration
```

\$ rails server

```
Last login: Wed Jul 13 10:42:18 on ttys011
kouji:/Users/kouji:0
dhcp219$ cd /Users/kouji/work/MacRuby/MacRuby/issues/work/demo
kouji:/Users/kouji/work/MacRuby/MacRuby/issues/work/demo:0
dhcp219$ env VM_DISABLE_RBO=1 macruby -S rails server
=> Booting WEBrick
=> Rails 3.0.7 application starting in development mode
=> Call with -d to detach
=> Ctrl-C to shutdown server
[2011-07-15 08:32:52] INFO  WEBrick 1.3.1
[2011-07-15 08:32:52] INFO  ruby 1.9.2 (2008-06-01) [universal-darwin11.0]
[2011-07-15 08:32:52] INFO  WEBrick::HTTPServer#start: pid=20943 port=3000
```

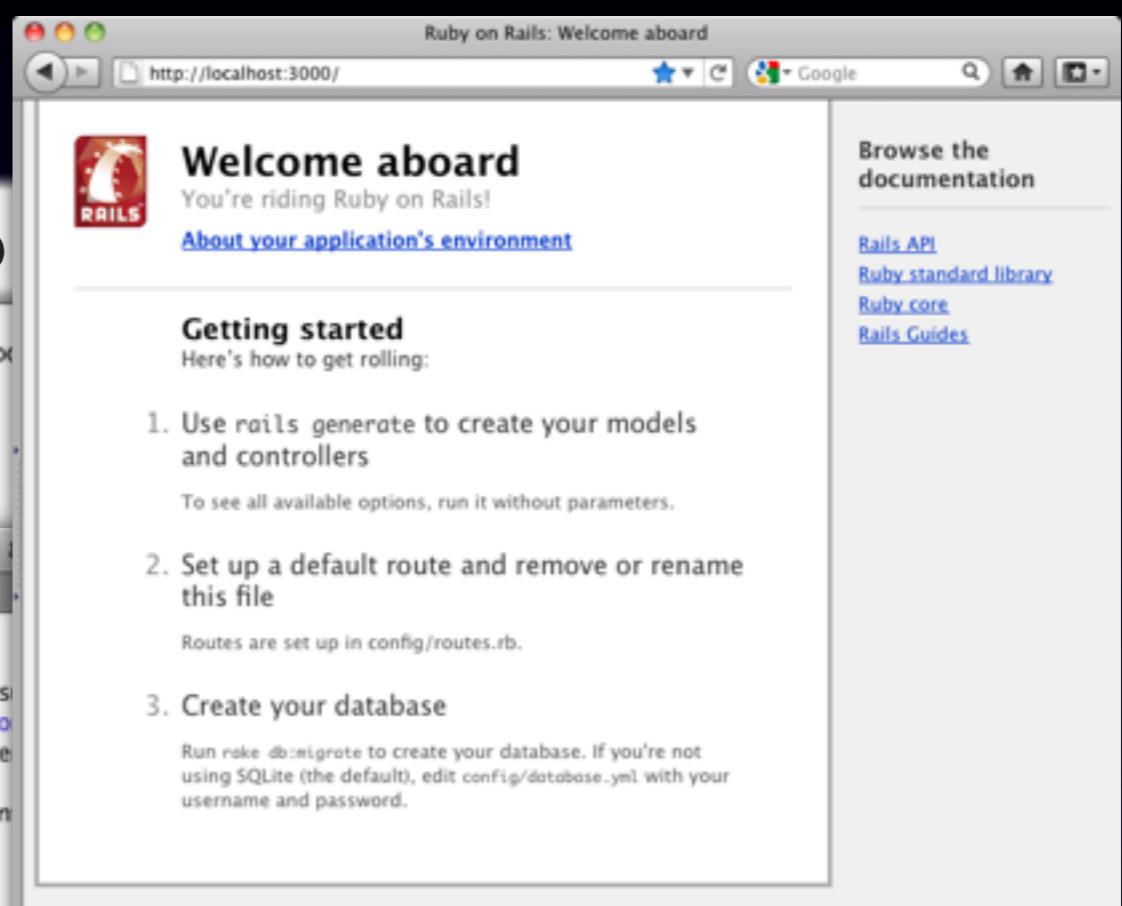

7 months ago...



7 months ago...

March 2011



7 months ago...

March 2011

- I thought, "Does Rails work on MacRuby?".



7 months ago...

March 2011

- I thought, "Does Rails work on MacRuby?".
- I managed to **install** Rails.

```
$ sudo macgem install rails  
7 gems installed
```

```
$ sudo macgem install sqlite3-ruby  
2 gems installed
```



Perhaps...



Perhaps...

- I thought, "OK, it installed, but surely the Rails generators won't work...".



Perhaps...

- I thought, "OK, it installed, but surely the Rails generators won't work...".
- However, I managed to **create a Rails project!?**

```
$ macruby -S rails new demo
      create
      create  README
...
      create  vendor/plugins
      create  vendor/plugins/.gitkeep
```



Are you kidding me?



Are you kidding me?

- I tried to generate a scaffold...



Are you kidding me?

- I tried to generate a scaffold...
- It failed. After all Rails didn't work on MacRuby.

```
$ macruby -S rails generate scaffold Bookmark  
title:string description:text url:string  
...  
Assertion failed: ((size_t)pos <  
current_exceptions.size()), function  
pop_current_exception, file vm.cpp, line 3434.  
zsh: abort    macruby -S rails generate scaffold  
Bookmark title:string description:text
```



Are you kidding me?

- I tried to generate a scaffold...
- It failed. After all Rails didn't work on MacRuby.

```
$ macruby -S rails generate scaffold Bookmark  
title $ macruby -S rails server  
...  
Assertion failed: ((size_t)pos < current_exceptions.size()),  
function pop_current_exception, file vm.cpp, line 3434.  
zsh: abort    macruby -S rails server  
po  
zsh
```

Bookmark title:string description:text



My approach

Run Rails

SEGV or abort

Research

Coding

Run RubySpec

Run Rails



My approach



Required knowledge
and technology

- cRuby
- Objective-C
- C++
- LLVM



#860 catch/throw

→ MacRuby aborts if you use catch and throw inside a rescue clause.



#860 catch/throw

→ MacRuby aborts if you use catch and throw inside a rescue clause.

```
01: begin
02:   raise
03: rescue
04:   catch(:foo) { throw :foo }
05:   p :ok
06: end
```



#860 catch/throw

→ MacRuby aborts if you use catch and throw inside a rescue clause.

```
01: begin
02:   raise
03: rescue
04:   catch(:foo) { throw :foo }
05:   p :ok
06: end
```

```
:ok
Assertion failed: ((size_t)pos < current_exceptions.size()),
function pop_current_exception, file vm.cpp, line 3448.
```



Exception Stack

```
01: begin
push
02:   raise "A"
03: rescue
04: begin
push
05:   raise "B"
06: rescue
pop
07: end
pop
08: end
```

"B"

"A"

Exception Stack



catch / throw

```
01: catch(:foo) {  
02:   begin  
03:     raise "A"  
04:   rescue  
05:     throw :foo  
06:   end  
07: }
```

push

pop

"A"

Exception Stack



catch / throw

vm.cpp:4321:



catch / throw

vm.cpp:4321:

```
VALUE
RoxorVM::ruby_throw(VALUE tag, VALUE value)
{
...
    // We must pop the current VM exception in case
    // we are in a rescue handler,
    // since we are going to unwind the stack.
    if (current_exception() != Qnil) {
        pop_current_exception();
    }
...
```



catch / throw

Before being fixed(60723bf~), 'throw' always popped the current Exception.

vm.cpp:4321:

```
VALUE
RoxorVM::ruby_throw(VALUE tag, VALUE value)
{
...
    // We must pop the current VM exception in case
    // we are in a rescue handler,
    // since we are going to unwind the stack.
    if (current_exception() != Qnil) {
        pop_current_exception();
    }
...
```



#860 catch/throw

push


pop

pop

Abort!!

"A"

Exception Stack

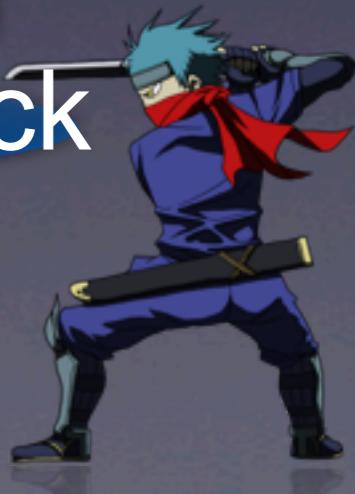

#860 catch/throw

```
01: begin  
push 02: raise  
03: rescue  
pop 04: catch( :foo ) { throw :foo }  
05: p :ok  
pop 06: end
```

Abort!!

"A"

Exception Stack



#860 catch/throw

- Fixed that MacRuby pop Exceptions if it only needs.(60723bf)



#860 catch/throw

- Fixed that MacRuby pop Exceptions if it only needs.(60723bf)

```
vm.cpp:4318:  
VALUE  
RoxorVM::ruby_throw(VALUE tag, VALUE value)  
{  
...  
    rb_vm_catch_t *catch_ptr = iter->second;  
    while (catch_ptr->current_exception != current_exception()) {  
        pop_current_exception();  
    }  
...}
```



#860 catch/throw

- Fixed that MacRuby pop Exceptions if it only needs.(60723bf)

```
vm.cpp:4318:  
VALUE  
RoxorVM::ruby_  
{  
...  
    rb_vm_catch_t *catch_ptr = iter->second;  
    while (catch_ptr->current_exception != current_exception()) {  
        pop_current_exception();  
    }  
...}
```

pop Exception if processing Exception by catch(catch_ptr->current_exception) and current Exception (current_exception()) are equal.



#860 catch/throw

push

```
begin
  raise
rescue
  catch(:foo) {
    begin
      raise
    rescue
      throw :foo
    end
  }
  p :ok
end
```

push

pop

pop

"A"

Exception Stack



#860 catch/throw

push

```
begin
  raise
rescue
  catch(:foo) {
    begin
      raise
    rescue
      throw :foo
    end
  }
  p :ok
end
```

push

pop

pop

Exception A

"A"

Exception Stack



#860 catch/throw

push

```
begin          Exception A
raise
rescue
catch(:foo) {
    begin
        raise
    rescue
        throw :foo
    end
}
p :ok
end
```

store Exception A
catch_ptr->current_exception = current_exception();

push

pop

pop

"A"

Exception Stack



#860 catch/throw

push

```
begin
  raise
rescue
  catch(:foo) {
    begin
      raise
    rescue
      throw :foo
    end
  }
  p :ok
end
```

Exception A

store Exception A
catch_ptr->current_exception = current_exception();

Exception B

push

pop

pop

"A"

Exception Stack



#860 catch/throw

push

```
begin
  raise
rescue
  catch(:foo) {
    begin
      raise
    rescue
      throw :foo
    end
  }
  p :ok
end
```

Exception A

store Exception A
catch_ptr->current_exception = current_exception();

Exception B

pop Exception C and Exception B in comparison with Exception A which we recorded in order of Exception C, B, A

"A"

Exception Stack



#860 catch/throw

push

```
begin          Exception A
raise
rescue
catch(:foo) {
    begin
        raise
    rescue
        throw :foo
    end
}
p :ok
end          pop Exception A
```

store Exception A
catch_ptr->current_exception = current_exception();

Exception B

pop Exception C and Exception B in comparison with Exception A which we recorded in order of Exception C, B, A


"A"

push

pop

pop

Exception Stack

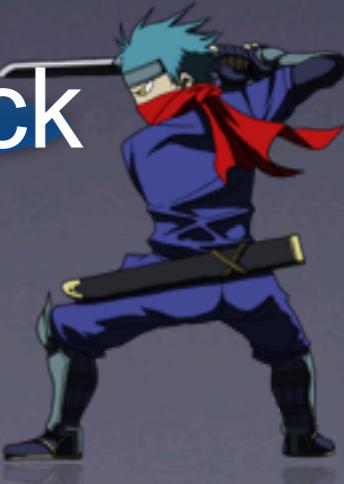

#1192 Constant Lookup

→ Almost can't lookup nested constants.



#1192 Constant Lookup

→ Almost can't lookup nested constants.

```
module A
  B = 10
  Object.class_eval { B }
end
```

cRuby

MacRuby




#1192 Constant Lookup

→ Almost can't lookup nested constants.

```
module A
  B = 10
  Object.class_eval { B }
end
```

cRuby

MacRuby

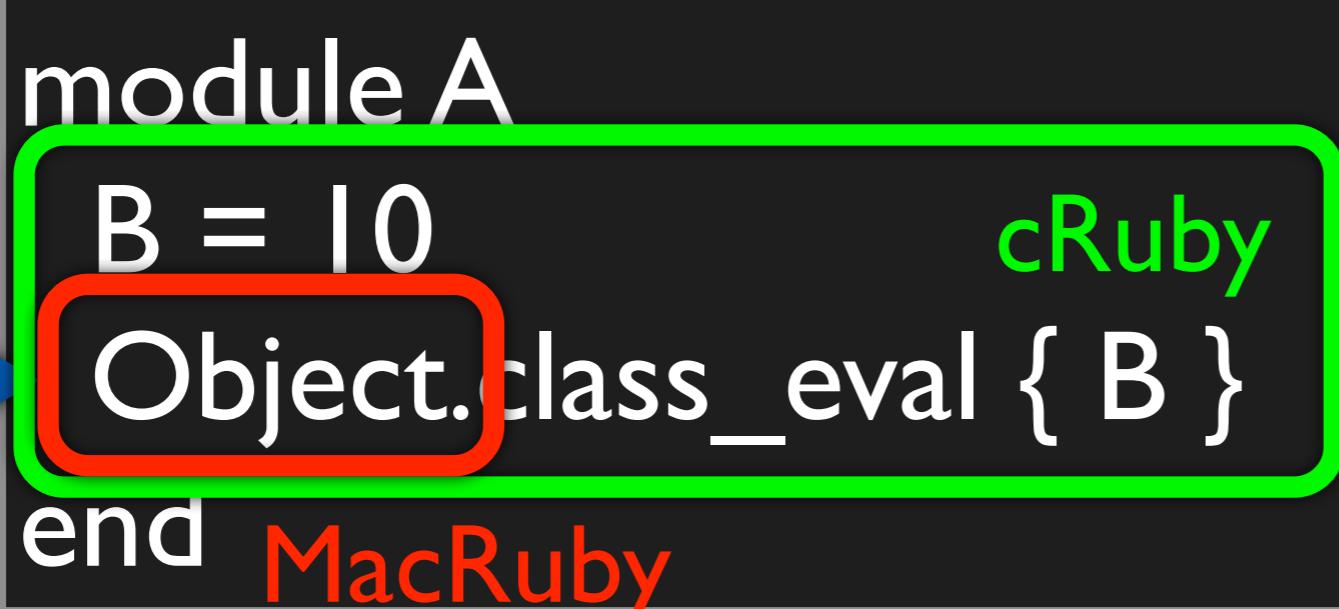

reduction.rb:3:in `block': uninitialized constant
B (NameError)



#1192 Constant Lookup



cRuby

Lexical Scope

Lexical Constant Lookup



#1192 Constant Lookup

```
1 module A
2   module B
3     CONST = "B's Const"
4     module ::A
5       p CONST
6     end
7   end
8 end
```

cRuby

Lexical Scope

Lexical Constant Lookup



#1192 Constant Lookup

Before fixed (6b101bd~), didn't implement
the Lexical Constant Lookup



MacRuby



#1192 Constant Lookup

Before fixed (6b101bd~), didn't implement
the Lexical Constant Lookup

```
1:module A
2: module B
3:   CONST = "B's Const"
4:   module ::A
5:     p CONST
6:   end
7: end
8: end
```

MacRuby



#1192 Constant Lookup

Before fixed (6b101bd~), didn't implement the Lexical Constant Lookup

```
1:module A
2: module B
3:   CONST = "B's Const"
4:   module ::A
5:     p CONST
6:   end
7: end  MacRuby
8: end
```

-e:5:in `block': uninitialized constant A::CONST (NameError)



Constant Lookup is complex


class_eval(&Block)

```
module A
  CONST = "A's CONST"
  def f
    class_eval {
      p CONST
    }
  end
end

class K
  CONST = "K's CONST"
  extend A
  f
end
```

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

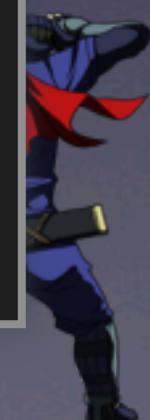

```
class_eval(&Block)
```

cRuby

```
01: module A
02:   CONST = "A's CONST"
03:   def f()
04:     class_eval {
05:       p CONST
06:     }
07:   end
08: end
```

Lexical Scope

```
09:
10: class K
11:   CONST = "K's CONST"
12:   extend A
13:   f()
14: end
```



```
class_eval(&Block)
```

cRuby

```
01: module A
02:   CONST = "A's CONST"
03:   def f()
04:     class_eval {
05:       p CONST
06:     }
07:   end
08: end
09:
```

Lexical Scope

"A's CONST"

```
11: CONST = "K's CONST"
12: extend A
13: f()
14: end
```



class_eval(String)

```
01: module A
02:   CONST = "A's CONST"
03:   def f()
04:     class_eval <<-EOS
05:       p CONST
06:     EOS
07:   end
08: end
09:
10: class K
11:   CONST = "K's CONST"
12:   extend A
13:   f()
14: end
```

cRuby

Dynamic Scope



class_eval(String)

```
01: module A
02:   CONST = "A's CONST"
03:   def f()
04:     class_eval <<-EOS
05:       p CONST
06:     EOS
07:   end
08: end
09:
```

cRuby

"K's CONST"

```
11: CONST = "K's CONST"
12: extend A
13: f()
14: end
```

Dynamic Scope



Constant Lookup is complex

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

class_eval(&Block)

```
module A
CONST = "A's CONST"
def f
  class_eval {
    p CONST
  }
end
end

class K
CONST = "K's CONST"
extend A
f
end
```



Constant Lookup is complex

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST #> "K's CONST"
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

class_eval(&Block)

```
module A
CONST = "A's CONST"
def f
  class_eval {
    p CONST
  }
end
end

class K
CONST = "K's CONST"
extend A
f
end
```



Constant Lookup is complex

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST #=> "K's CONST"
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

class_eval(&Block)

```
module A
CONST = "A's CONST"
def f
  class_eval {
    p CONST #=> "A's CONST"
  }
end
end

class K
CONST = "K's CONST"
extend A
f
end
```



Constant Lookup is complex

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST #=> "K's CONST"
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

class_eval(&Block)

```
module A
CONST = "A's CONST"
def f
  class_eval {
    p CONST #=> "A's CONST"
  }
end
end

class K
CONST = "K's CONST"
extend A
f
end
```

lookup CONST in order
of Constant K,A, Object



Constant Lookup is complex

class_eval(String)

```
01:module A
02: CONST = "A's CONST"
03: def f
04:   class_eval <<-EOS
05:     p CONST #=> "K's CONST"
06:   EOS
07: end
08:end
09:
10:class K
11: CONST = "K's CONST"
12: extend A
13: f
14end
```

class_eval(&Block)

```
module A
CONST = "A's CONST"
def f
  class_eval {
    p CONST #=> "A's CONST"
  }
end
end

class K
CONST = "K's CONST"
extend A
f
end
```

lookup CONST in order
of Constant K,A, Object

lookup CONST in order
of Constant A, Object.
Does not lookup from K.



Managed somehow



A very complex bug

Lexical



A very complex bug

```
01: module A
02:   B = 42
03: end
04:
05: A.class_eval do
06:   def self.f
07:     p B
08:   end
09: end
10:
11: A.f
```

Lexical



A very complex bug

CAUTION

'class_eval' doesn't add receiver(A) to
constant lookup scope.

```
04:  
05: A.class_eval do  
06:   def self.f  
07:     p B  
08:   end  
09: end  
10:  
11: A.f
```

Lexical



A very complex bug



A very complex bug

Ruby 1.9
42



A very complex bug

Ruby 1.9
42

Ruby 1.8.7
-e:8:in `f': uninitialized constant B (NameError)



A very complex bug

A CRuby's Bug

Ruby 1.9

42

Ruby 1.8.7

e.8.in 'f': uninitialized constant B (NameError)



A very complex bug

```
01: module A
02:   B = 42
03: end
04:
05: A
06:
07:
08:
09: end
10: A
```


A CRuby's Bug

undefined constant B (NameError)




#I390 rb_vm_prepare_block

→ Abort when I pressed "About your application's environment" in rails 3.0.7 Welcome Page.

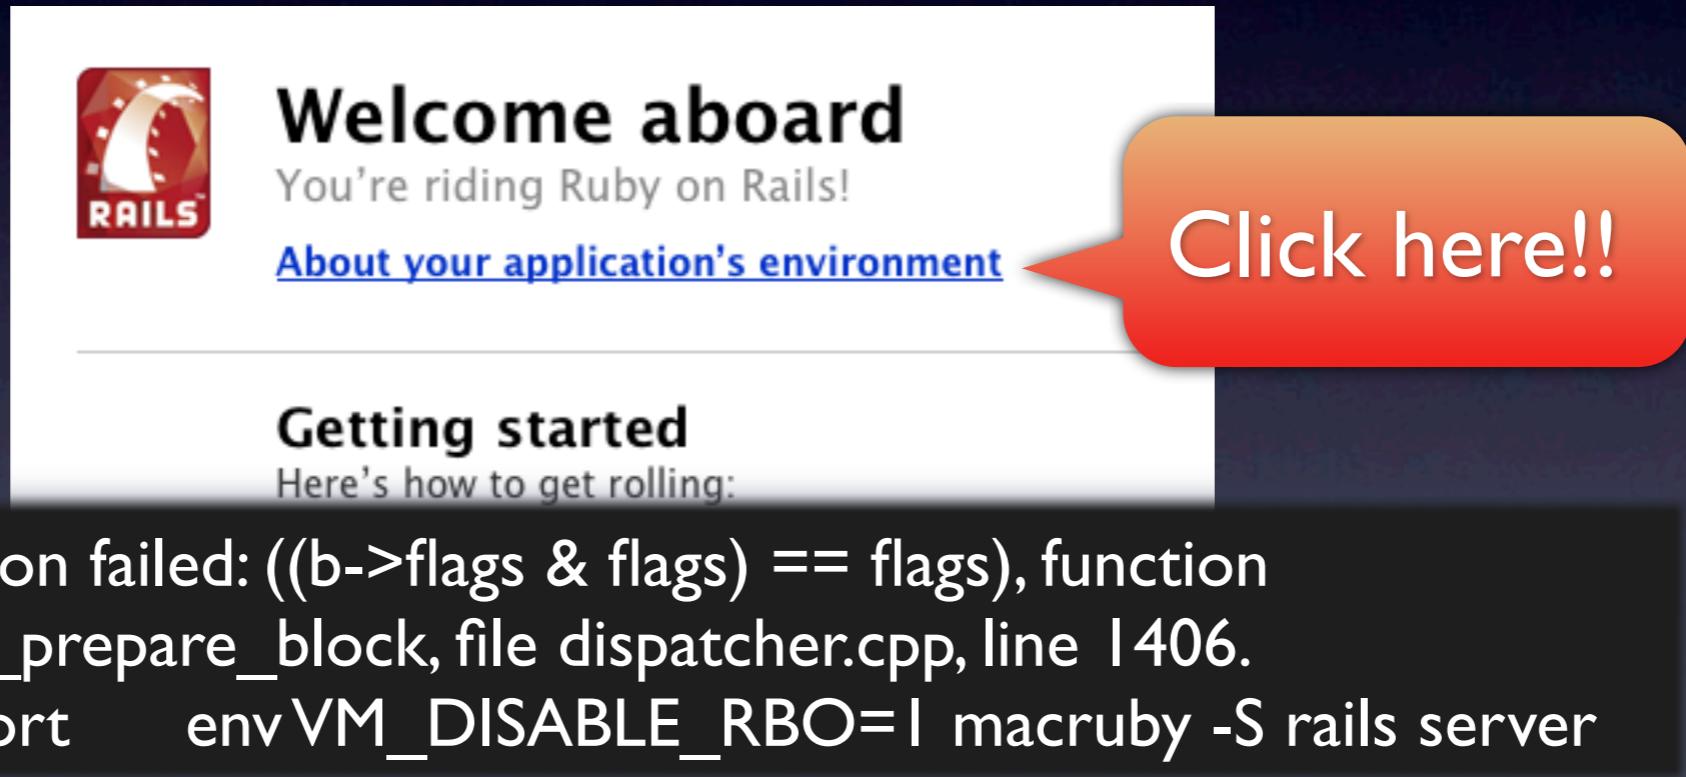

MacRuby trip by the train continues...

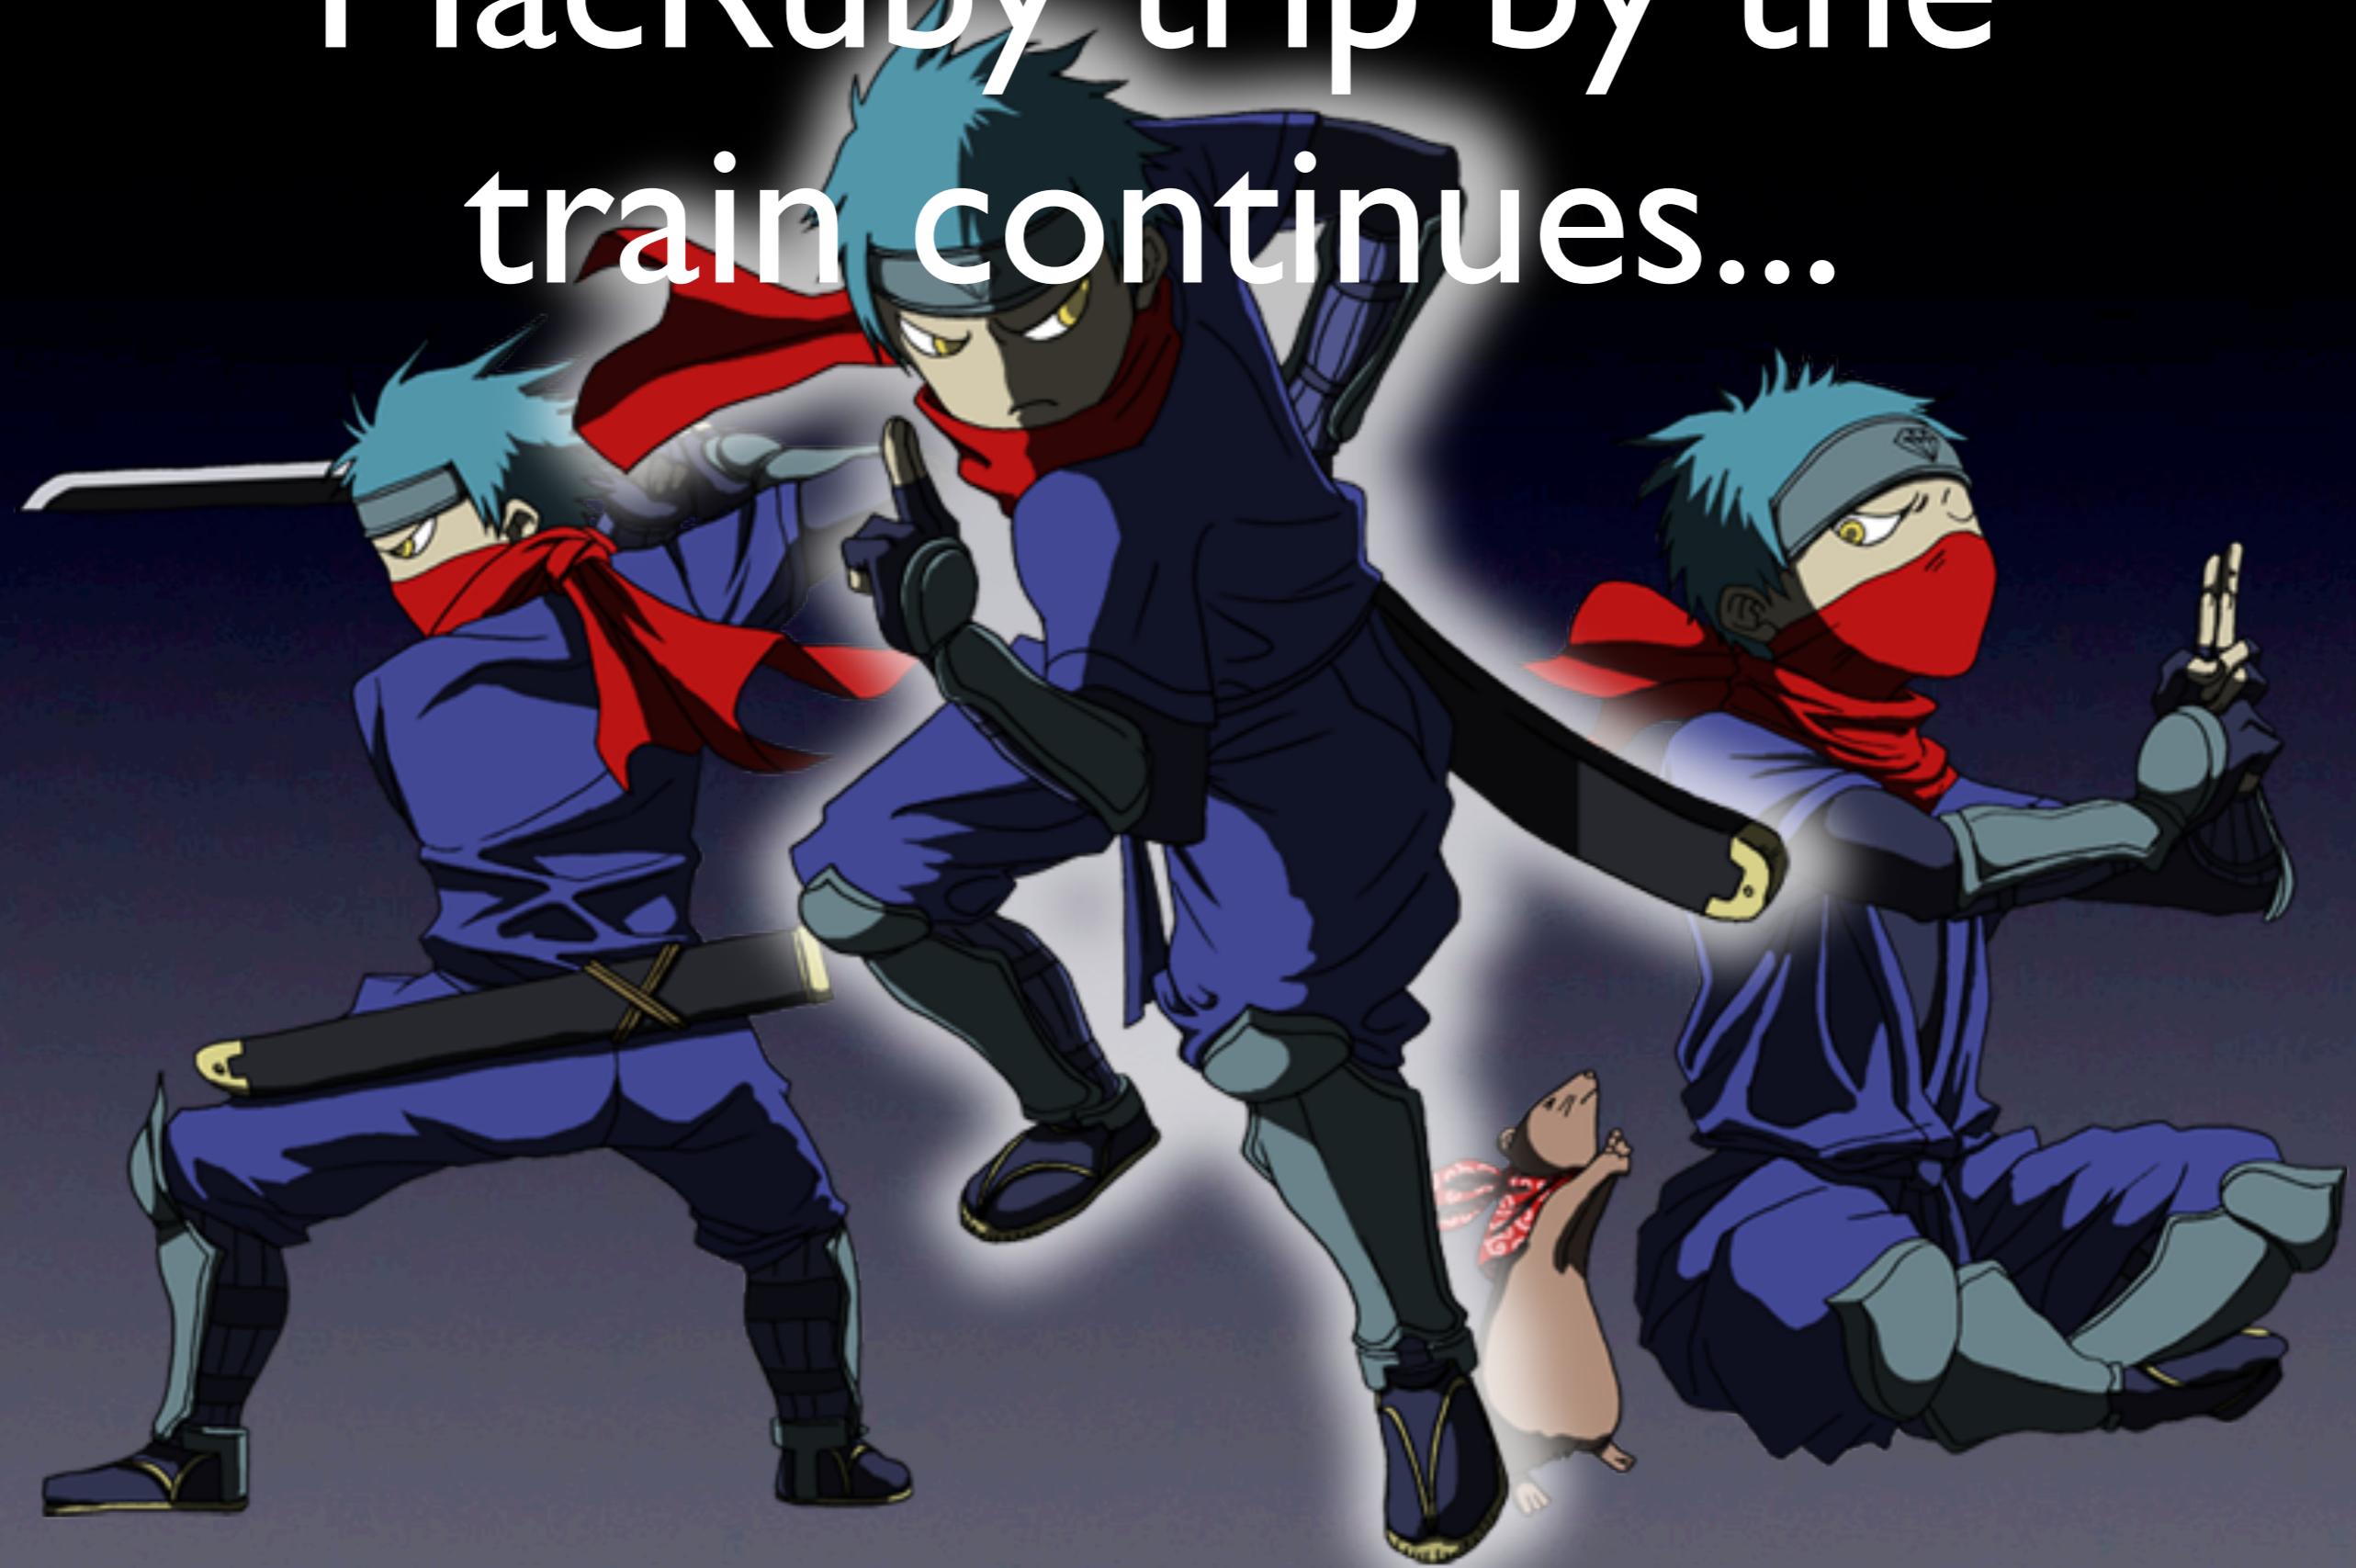

MacRuby trip by the

<http://www.macruby.org/> ...



MacRuby trip by the

<http://www.macruby.org/> ...

@macruby




MacRuby trip by the

<http://www.macruby.org/> ...

@macruby

GitHub:MacRuby/MacRuby



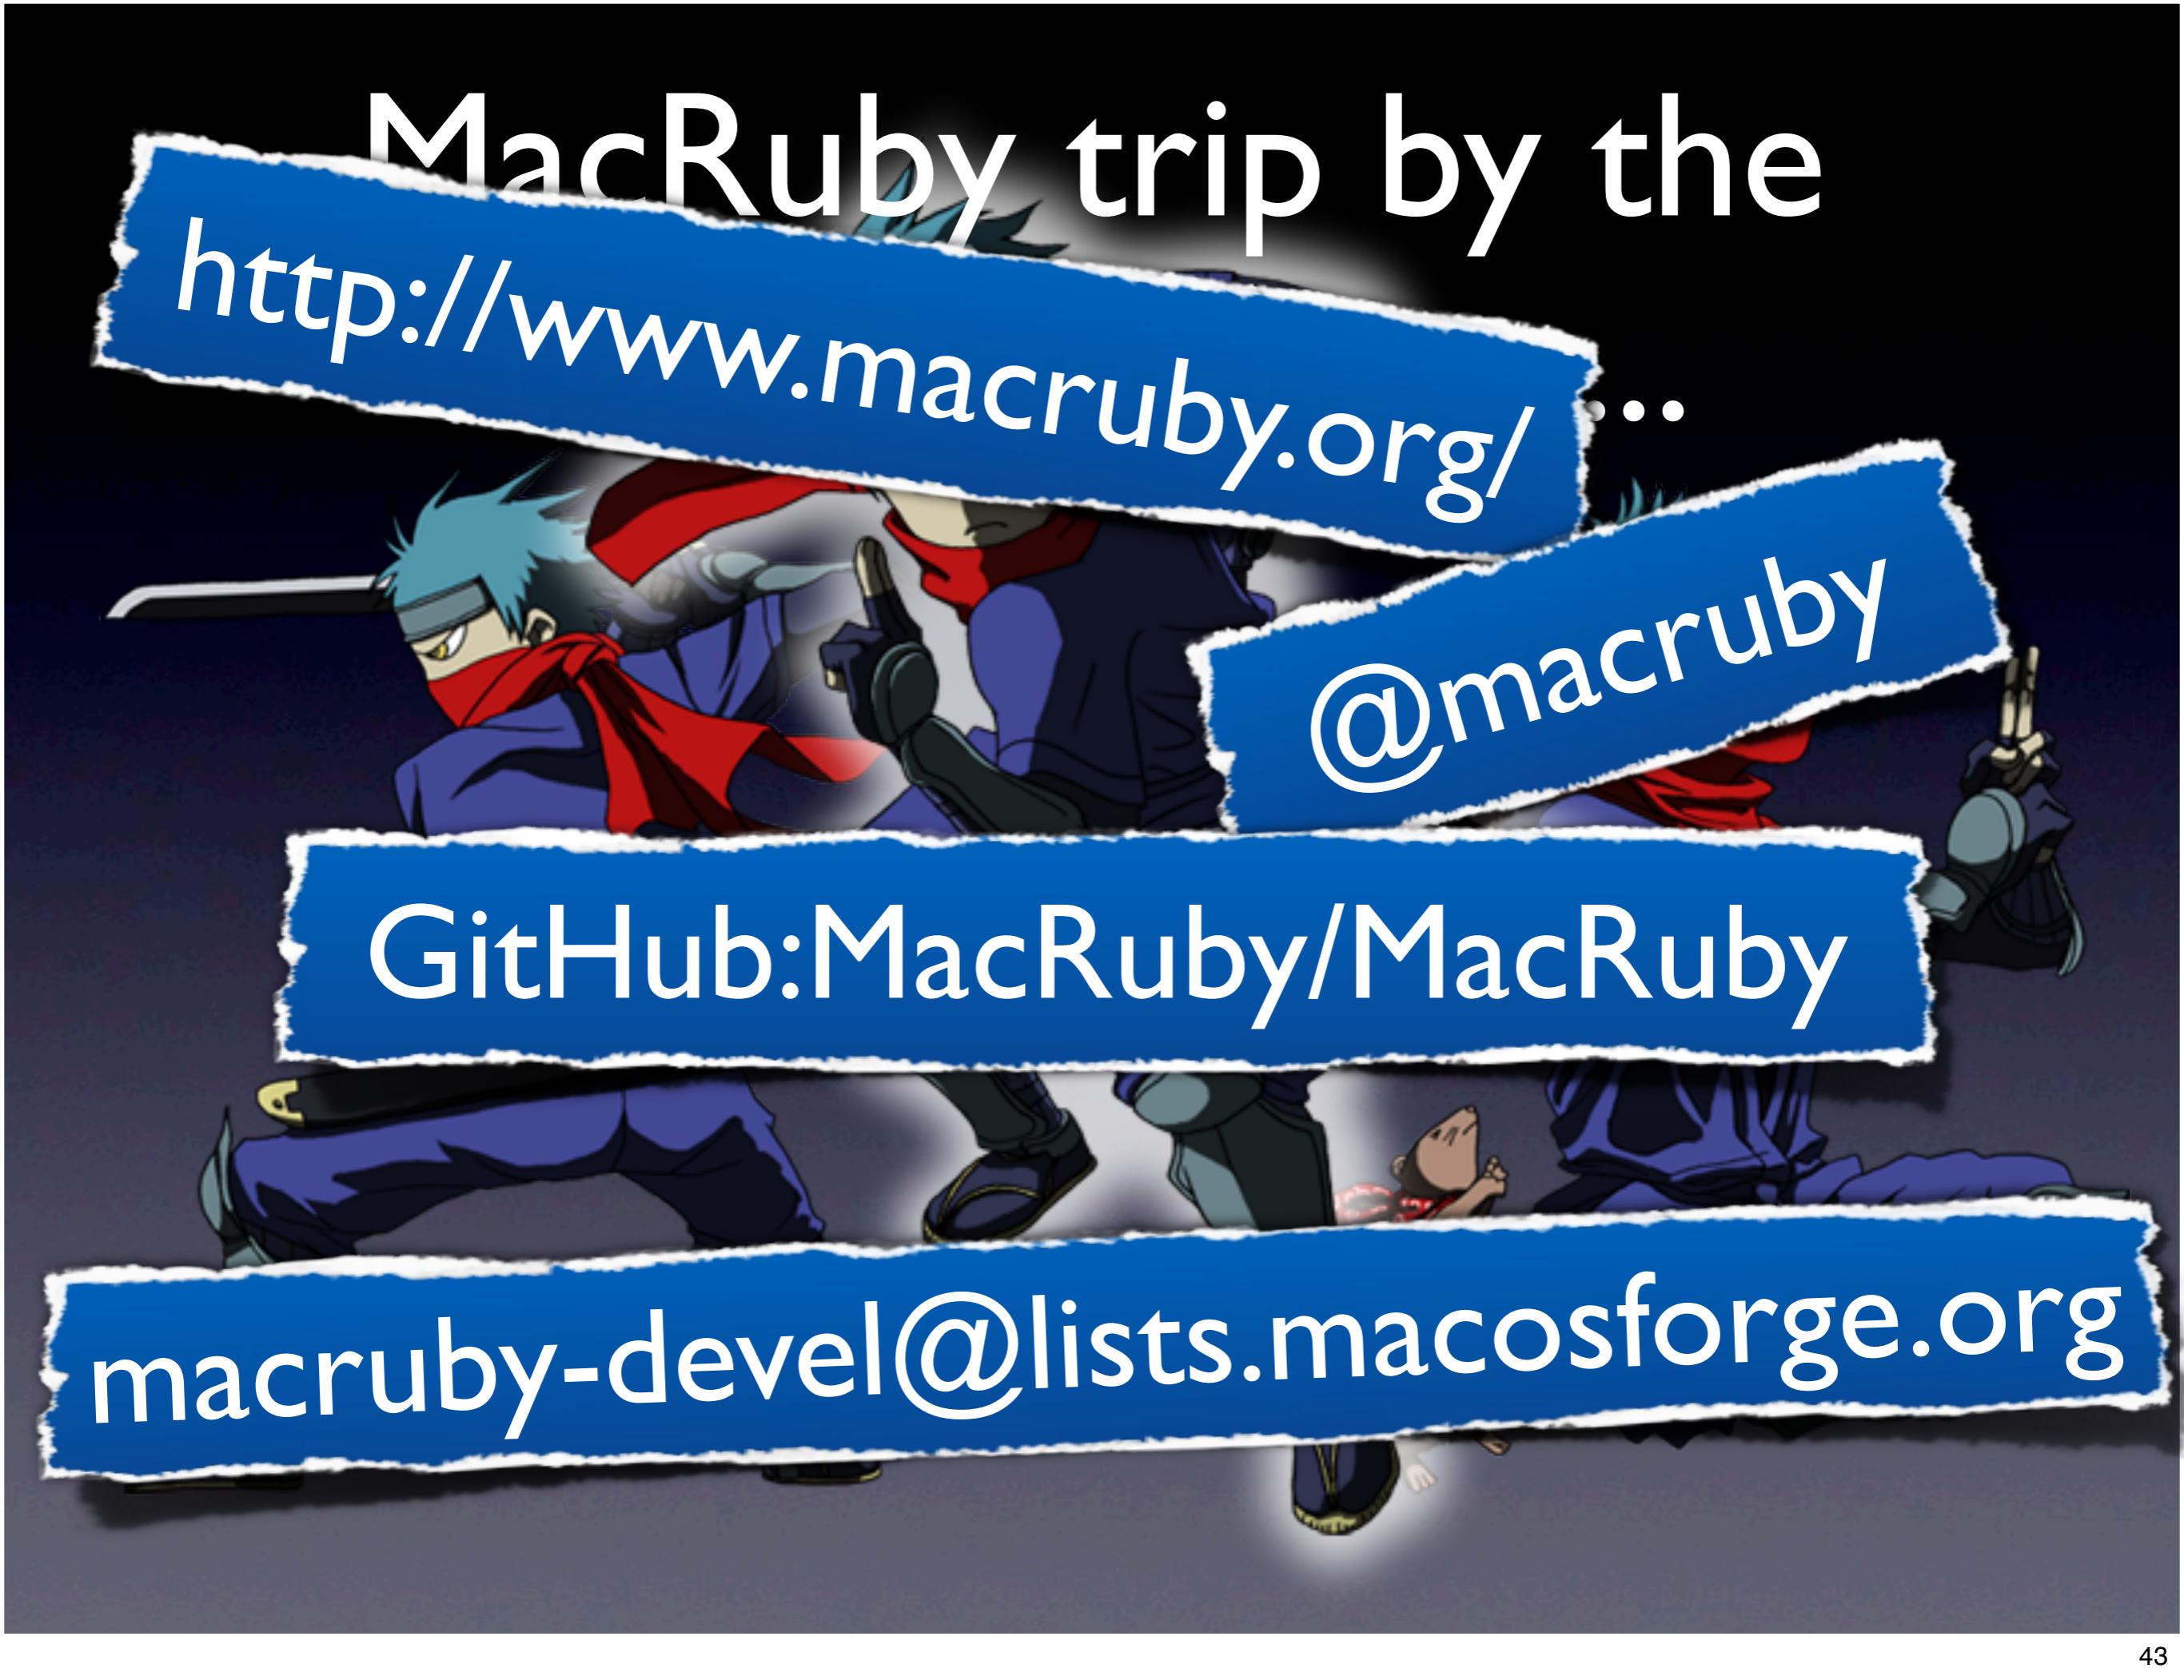

MacRuby trip by the

<http://www.macruby.org/> ...

@macruby

GitHub:MacRuby/MacRuby

macruby-devel@lists.macosforge.org

Conclusion

- MacRuby
 - A unique blend of Ruby 1.9 and Objective-C.
 - The goal is to be 100% compatible with Ruby 1.9.
- MacRuby on Rails
 - We became to show the Welcome Page.
 - But we have many things to complete.

Q & A

- I'd like you to give me a simple question and speak more slowly.
- or contact [@takaokouji_en](https://twitter.com/takaokouji_en) by Twitter
- or send e-mail to MacRuby ML

Acknowledgment

- RubyConf team
- Tor
- Everyone