

Lab 3: Hypothesis Tests about the Mean.

w203: Statistics for Data Science

Tako Hisada

11/08/2017

Introduction

The Data

The American National Election Studies (ANES) conducts surveys of voters in the United States before and after every presidential election. You are given a small subset of the 2012 ANES survey, contained in the file ANES_2012_sel.csv.

There are a number of special concerns that arise whenever statisticians work with survey data. In particular, the complete ANES survey data assigns a survey weight to each observation, which corrects for differences in how likely individuals are to be selected, and how likely they are to respond. For the purposes of this assignment, however, we have removed the survey weights and we ask you to assume that the observations you have are a random sample from the voting population.

For a glimpse into some of the intricacies that go into survey design, take a look at the introduction to the ANES User's Guide and Codebook.

```
S = read.csv("ANES_2012_sel.csv")
```

Following is an example of a question asked on the ANES survey:

Where would you place YOURSELF on this scale, or haven't you thought much about this?

Possible answers included:

- 1. Extremely liberal
- 2. Liberal
- 3. Slightly liberal
- 4. Moderate; middle of the road
- 5. Slightly conservative
- 6. Conservative
- 7. Extremely conservative
- -2. Haven't thought much about this
- -8. Don't know
- -9. Refused

The variable libcpre_self records answers before the election, while libcpo_self records answers after the election.

Analysis

1. Did voters become more liberal or more conservative during the 2012 election?

Analysis

All survey responses can be forced into numeric values on the scale of 1-7, -2, -8 or -9.

```
table(S$libcpre_self, as.numeric(S$libcpre_self))
```

```
##
##           1      2      3      4      5      6      7
## -2. Haven't thought much about this 556      0      0      0      0      0      0
## -8. Don't know                      0     26      0      0      0      0      0
## -9. Refused                         0      0     32      0      0      0      0
## 1. Extremely liberal                 0      0      0     195      0      0      0
## 2. Liberal                          0      0      0      0     638      0      0
## 3. Slightly liberal                  0      0      0      0      0     641      0
## 4. Moderate; middle of the road      0      0      0      0      0      0    1828
## 5. Slightly conservative             0      0      0      0      0      0      0
## 6. Conservative                     0      0      0      0      0      0      0
## 7. Extremely conservative            0      0      0      0      0      0      0
##
##           8      9     10
## -2. Haven't thought much about this  0      0      0
## -8. Don't know                      0      0      0
## -9. Refused                         0      0      0
## 1. Extremely liberal                 0      0      0
## 2. Liberal                          0      0      0
## 3. Slightly liberal                  0      0      0
## 4. Moderate; middle of the road      0      0      0
## 5. Slightly conservative            789      0      0
## 6. Conservative                     0    1001      0
## 7. Extremely conservative            0      0    208
```

```
n = length(S$libcpre_self)
```

Our n is 5914.

In order to measure where people stand on the political spectrum, however, the answers -2, -8 or -9 are not informative. Also because of the presence of these values, the numeric values assigned by R are off by 3 from the numbers present in the survey answer choices (i.e. R assigned 4 to “1. Extremely liberal”).

We need to re-assign values to match the survey answer choices and also 0 out the values for the choices -2, -8 and -9.

```
# Function for generating a vector filled with a specified value
```

```
generateSeq <- function(v, value) {
  seq = c()
  for(i in 1:length(v)) {
    seq[i] = value
  }
  seq
}
```

```
# Function for generating political weights nulling invalid answers
```

```

compilePoliticalWeights <- function(v, null_index, skip_zero = FALSE) {
  num_v = as.numeric(v)
  weights = c()

  for(i in 1:length(unique(num_v))) {
    if(i <= null_index) {
      if(!skip_zero) {
        weights = c(weights, generateSeq(num_v[num_v == i], 0))
      }
    } else {
      weights = c(weights, generateSeq(num_v[num_v == i], i - null_index))
    }
  }
  weights
}


libcpre_weights <- compilePoliticalWeights(S$libcpre_self, 3, TRUE)
summary(libcpre_weights)

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.000  3.000   4.000   4.172  5.000   7.000

mu_libcpre = mean(libcpre_weights)
hist(libcpre_weights, main = "Pre-2012 Election Political Standing",
      xlab = "Political Standing")

```

Pre-2012 Election Political Standing

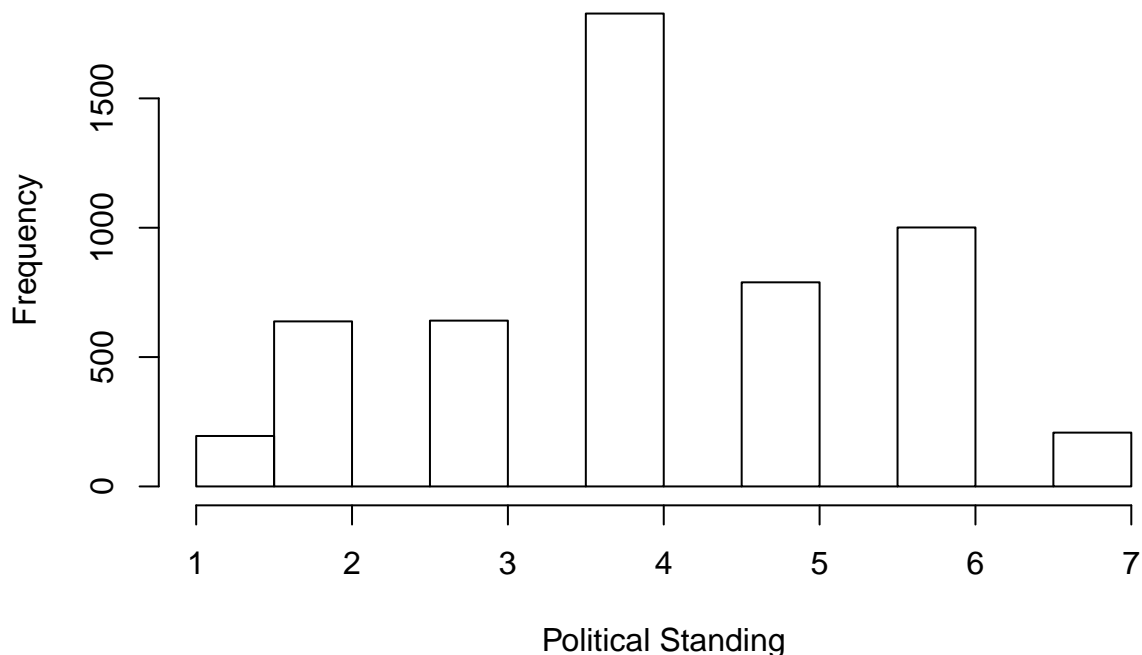

Our *mu* pre 2012 election is 4.1722642.

Likewise, we will need to do the same data sanitizing for the post-election data.

```
table(S$libcpo_self, as.numeric(S$libcpo_self))
```

```
##
##                                     1    2
## -2. Haven't thought much {do not probe} 410    0
## -6. Not asked, unit nonresponse (no post-election interview) 0 252
## -7. Deleted due to partial (post-election) interview 0    0
## -8. Don't know 0    0
## -9. Refused 0    0
## 1. Extremely liberal 0    0
## 2. Liberal 0    0
## 3. Slightly liberal 0    0
## 4. Moderate; middle of the road 0    0
## 5. Slightly conservative 0    0
## 6. Conservative 0    0
## 7. Extremely conservative 0    0
##
##                                     3    4
## -2. Haven't thought much {do not probe} 0    0
## -6. Not asked, unit nonresponse (no post-election interview) 0    0
## -7. Deleted due to partial (post-election) interview 152    0
## -8. Don't know 0 23
## -9. Refused 0    0
## 1. Extremely liberal 0    0
## 2. Liberal 0    0
## 3. Slightly liberal 0    0
## 4. Moderate; middle of the road 0    0
## 5. Slightly conservative 0    0
## 6. Conservative 0    0
## 7. Extremely conservative 0    0
##
##                                     5    6
## -2. Haven't thought much {do not probe} 0    0
## -6. Not asked, unit nonresponse (no post-election interview) 0    0
## -7. Deleted due to partial (post-election) interview 0    0
## -8. Don't know 0    0
## -9. Refused 36    0
## 1. Extremely liberal 0 166
## 2. Liberal 0    0
## 3. Slightly liberal 0    0
## 4. Moderate; middle of the road 0    0
## 5. Slightly conservative 0    0
## 6. Conservative 0    0
## 7. Extremely conservative 0    0
##
##                                     7    8
## -2. Haven't thought much {do not probe} 0    0
## -6. Not asked, unit nonresponse (no post-election interview) 0    0
## -7. Deleted due to partial (post-election) interview 0    0
## -8. Don't know 0    0
## -9. Refused 0    0
## 1. Extremely liberal 0    0
## 2. Liberal 646    0
## 3. Slightly liberal 0 639
```

```
## 4. Moderate; middle of the road 0 0
## 5. Slightly conservative 0 0
## 6. Conservative 0 0
## 7. Extremely conservative 0 0
##
## 9 10
## -2. Haven't thought much {do not probe} 0 0
## -6. Not asked, unit nonresponse (no post-election interview) 0 0
## -7. Deleted due to partial (post-election) interview 0 0
## -8. Don't know 0 0
## -9. Refused 0 0
## 1. Extremely liberal 0 0
## 2. Liberal 0 0
## 3. Slightly liberal 0 0
## 4. Moderate; middle of the road 1756 0
## 5. Slightly conservative 0 671
## 6. Conservative 0 0
## 7. Extremely conservative 0 0
##
## 11 12
## -2. Haven't thought much {do not probe} 0 0
## -6. Not asked, unit nonresponse (no post-election interview) 0 0
## -7. Deleted due to partial (post-election) interview 0 0
## -8. Don't know 0 0
## -9. Refused 0 0
## 1. Extremely liberal 0 0
## 2. Liberal 0 0
## 3. Slightly liberal 0 0
## 4. Moderate; middle of the road 0 0
## 5. Slightly conservative 0 0
## 6. Conservative 975 0
## 7. Extremely conservative 0 188
```


The data now contains 2 additional invalid values -6 and -7 in addition to -2, -8 and -9 we saw previously.

```
libcpo_weights <- compilePoliticalWeights(S$libcpo_self, 5, TRUE)
summary(libcpo_weights)
```

```
## Min. 1st Qu. Median Mean 3rd Qu. Max.
## 1.00 3.00 4.00 4.15 5.00 7.00
```

```
mu_libcpo = mean(libcpo_weights)
hist(libcpo_weights, main = "Post-2012 Election Political Standing", xlab = "Political Standing")
```

Post-2012 Election Political Standing

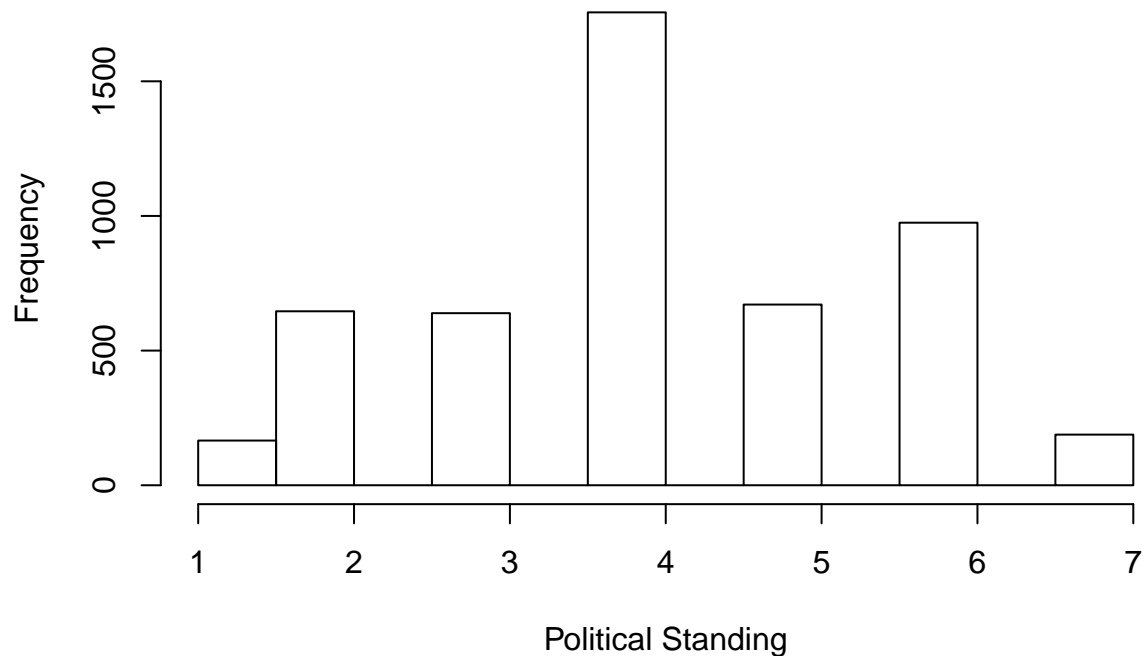

Our μ post 2012 election is 4.1499702 which is slightly lower than before the election suggesting there were more people identified with the liberal-side of the political spectrum.

Hypotheses

From this, we can formulate our hypotheses as below:

$$H_0 : \mu_1 - \mu_2 = 0$$

$$H_1 : \mu_1 - \mu_2 > 0$$

Statistical Significance

Justification

Our distribution is somewhat normal and our n is sufficiently large. We can conduct a t-test in determining if the post-election mean is in fact lower than the pre-election.

```
t.test(libcpre_weights, libcpo_weights, alternative = "greater")
```

```
##
## Welch Two Sample t-test
##
## data: libcpre_weights and libcpo_weights
## t = 0.77123, df = 10314, p-value = 0.2203
## alternative hypothesis: true difference in means is greater than 0
## 95 percent confidence interval:
## -0.02525793      Inf
## sample estimates:
```

```
## mean of x mean of y
## 4.172264 4.149970
```

Result

Our p-value is 0.2203. We fail to reject H_0 . We are unable to say if people became more liberal nor conservative as a result of this.

Practical Significance

There is no practical significance observed between μ_1 and μ_1 .

2. Were Republican voters (examine variable `pid_x`) older or younger (variable `dem_age_r_x`), on the average, than Democratic voters in 2012?
3. Were Republican voters older than 51, on the average in 2012?
4. Were Republican voters more likely to shift their political preferences right or left (more conservative or more liberal), compared to Democratic voters during the 2012 election?
5. Select a fifth question that you are interested in investigating.

Prepare a report addressing these questions. A successful submission should include:

1. A brief introduction.
2. A suitable hypothesis test for each question above.
3. For each test, include:
 - A brief exploratory analysis targetted to check the assumptions needed for your test.
 - A justification for why the test is the most appropriate choice
 - An explanation of test results, including *BOTH* statistical significance and practical significance.
4. A brief conclusion with a few high-level takeaways.

Please limit your submission to 10 pages. Be sure to submit both your pdf report as well as your source file.