Data Retention Tool

The TAK Server Data Retention tool provides two methods in support of data retention. The following describes how users can set retention policies for TAK data.

The Data Retention Policy view is under the Administrative menu, **Administrative Data Retention** . The view allows users to specify a retention policy for the following data types:

CoT (non-chat)

GeoChat (chat CoT messages)

Missions (including mission structure, tracks and files)

Mission Packages

Files (all enterprise sync data that is not mission data)

Users have the option of defining a *time-to-live (TTL)* interval on data in periods of hours, days, weeks, months and years. The data will expire after it exceeds the TTL relative to the time the data was created.

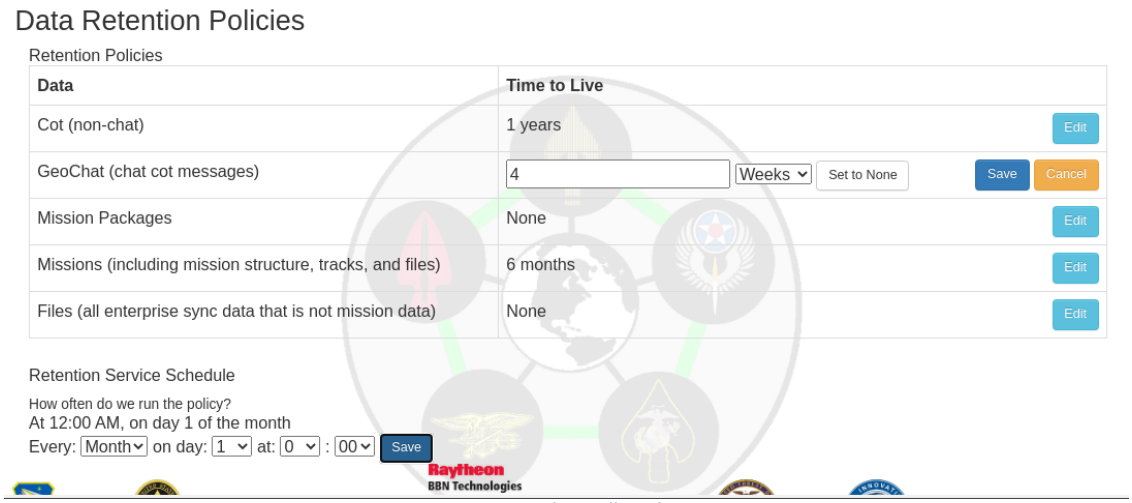

Data Retention Policy View

The deletion of the data is handled by the Retention service that executes periodically. The Retention service can be scheduled at a fixed date and time, e. g., run once a month at midnight on the first day of the month. By default, no policies are defined and the Retention service is set to never run. It is up to the TAK Server administrator to define a schedule in which the service runs at a frequency sufficient to meet the minimum time to live interval defined in the policies.

Auto-expiration of Mission, Mission packages and Files

An optional *Expiration* field may be set on Missions, Mission Packages and files. For Missions, the user sets the expiration in the Mission Editor view from the Mission Manager, **Data-> Mission Manager.** For Mission Packages and other files, the expiration is set in the Enterprise Sync table, **Data-> Enterprise Sync.** The expiration time may be set to a specific time in the future using the calendar and time selection controls. Once set, the data will automatically expire at the specified time.

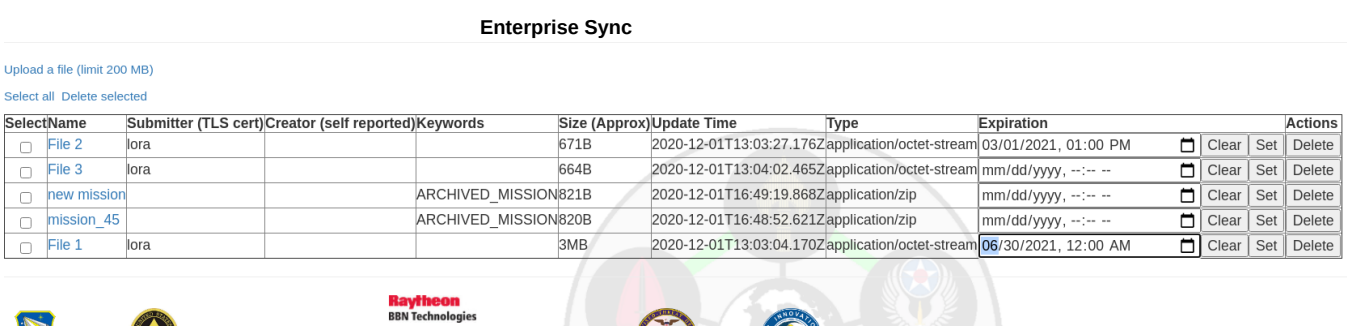

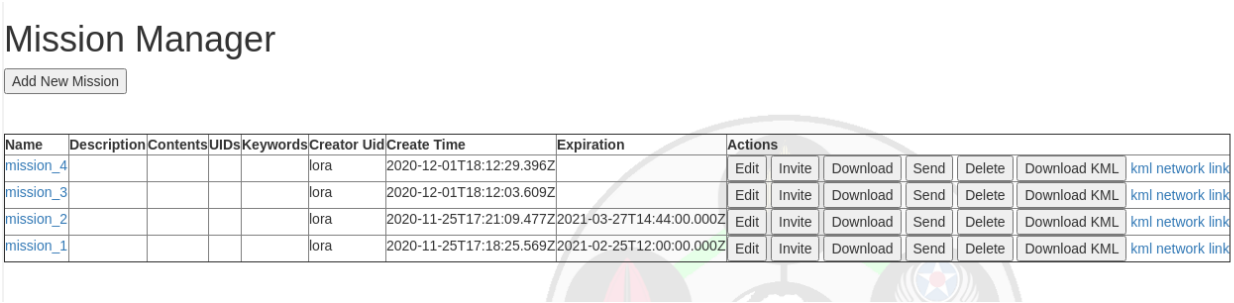

Calendar and Time Selection Controls

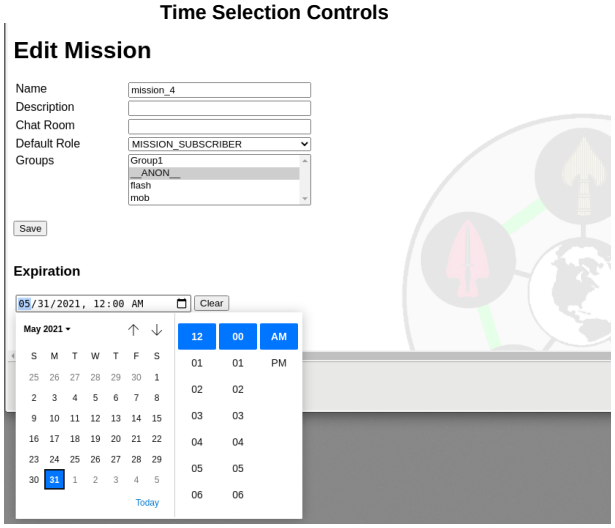

Expiration times may be modified or cleared and the expiration value will be updated immediately.

Mission Archiving

Mission Archiving is an additional data retention tool. This tool allows missions to be removed from the database and archived to disk after a period of inactivity. Mission Archiving can be configured by clicking on the mission archiving button located at the top of the Data Retention UI Page.

The following example shows the mission archiving configuration and archived entries. The configuration allows for missions to be archived based on the time of last content adds, last mission subscriptions or both. Existing missions will be archived and deleted from the database if the inactivity threshold is reached. Archived missions will be deleted from disk permanently if the archive expiration threshold is reached. A cron expression can be set for how often the mission archiving checks are run.
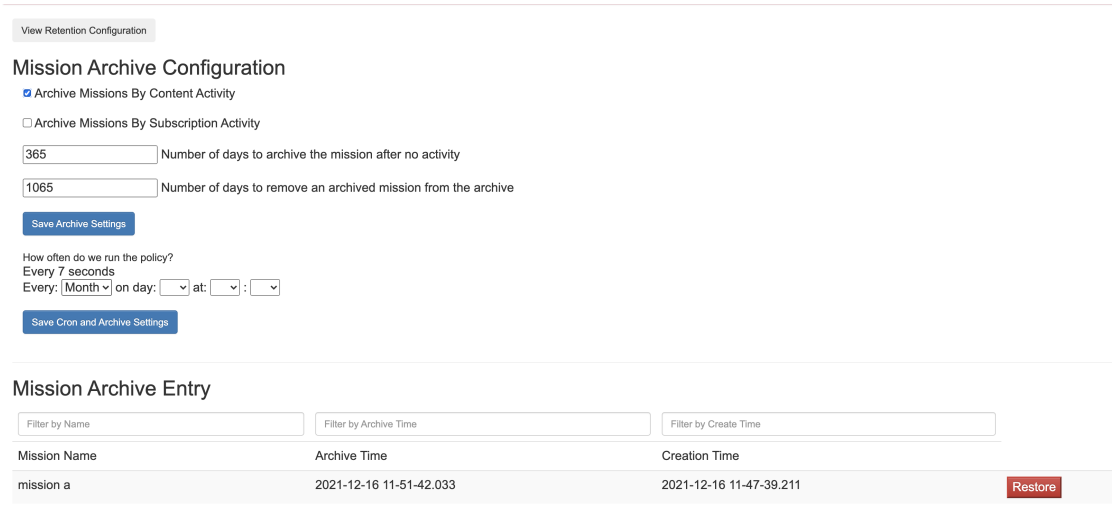
Once a mission is archived, it will show up in the Mission Archive Entry view. These can be filtered by mission name, mission creation time and mission archive time. A mission can be restored at any time by clicking on the Restore button next to the entry.