

How to install dev1 branch in localhost ?

By following the steps described below, you will be able to deploy the ngNationSound web application on your local computer while using and connecting to the back-end API deployed on Render.

1. Pre requisites

- Check if npm and node.js are installed on your computer

```
C:\windows\system32\cmd.exe
```

```
C:\Users\henri>npm -v  
10.8.0
```

```
C:\Users\henri>node -v  
v20.12.2
```

```
C:\Users\henri>
```

- If needed, navigate to <https://nodejs.org/en/download/prebuilt-installer> and follow the instructions
- Check if angular CLI is installed on your computer

```
C:\Users\henri>ng version
```

```
Angular CLI
```

```
Angular CLI: 17.3.7  
Node: 20.12.2  
Package Manager: npm 10.8.0  
OS: win32 x64
```

```
Angular:  
...
```

Package	Version
@angular-devkit/architect	0.1703.7 (cli-only)
@angular-devkit/core	17.3.7 (cli-only)
@angular-devkit/schematics	17.3.7 (cli-only)
@schematics/angular	17.3.7 (cli-only)

- If needed, install angular CLI

```
PROBLEMS OUTPUT TERMINAL PORTS
```

```
> ▼ TERMINAL
```

```
PS C:\Users\henri\Documents\nationsound\ngNationSound-dev1> npm install -g @angular/cli
```

How to install dev1 branch in localhost ?

2. Download dev1 branch zip file and unzip in your computer's local folder

 **ngNationSound** Public Pin Unwatch 1

 **prod1** had recent pushes 5 minutes ago Compare & pull request

 **dev1**  4 Branches  0 Tags

t Add file <> Code

This branch is 21 commits ahead of, 4 commits behind dev .

 **talfumier** Workaround to run app in localhost while connecteing to API o

 .github/workflows

Unit testing workflo

 .vscode

initial commit

 src

Workaround to run

 .editorconfig

initial commit

 .gitignore

vercel deployment

Local

Codespaces

Clone

HTTPS SSH GitHub CLI

<https://github.com/talfumier/ngNationSound.git>

Clone using the web URL.

Open with GitHub Desktop

Download ZIP

 This PC > Documents > nationsound

Name	Date modified	Type	Size
 ngNationSound-d		ZipArc ZIP Archive	554 KB

Open

Share with Skype

Edit with Notepad++

Edit with PhpStorm

Scan with Microsoft Defender...

Share

IZArc

Open with

Give access to

Restore previous versions

Send to

Cut

Copy

Create shortcut

Delete

Rename

Properties

Extract to...

Extract Here

Extract to .\ngNationSound-dev1

E-Mail ngNationSound-dev1.zip

Convert Archive

Create Self-Extracting (.EXE) File


Open with IZArc

Test


How to install dev1 branch in localhost ?

3. Open the project in VS Code and initialise it

- Open a terminal

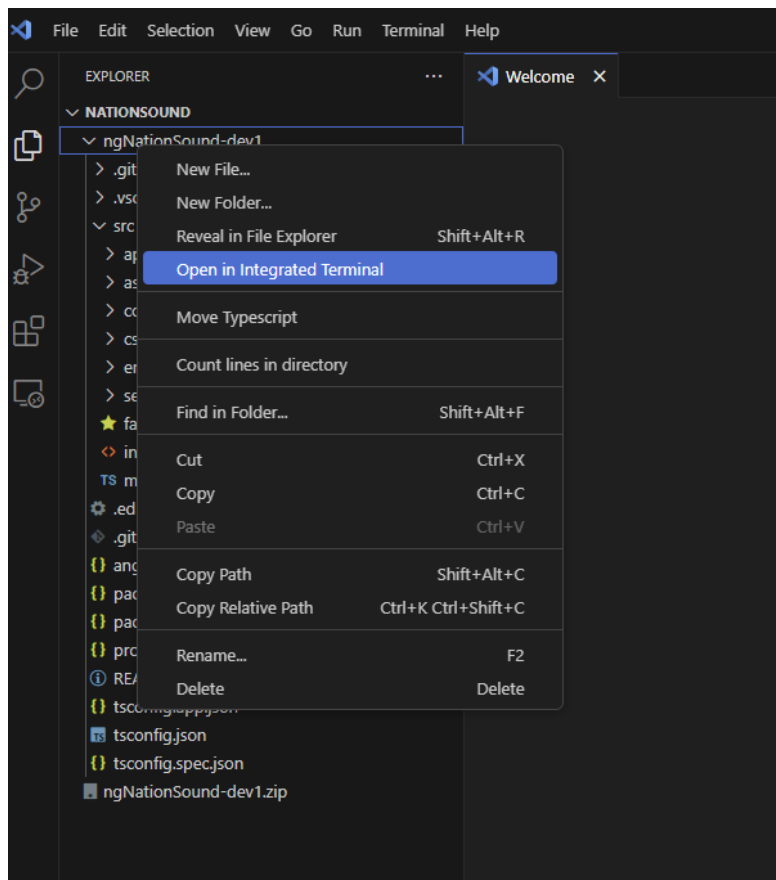


- Type npm install + enter and wait for packages to download and install

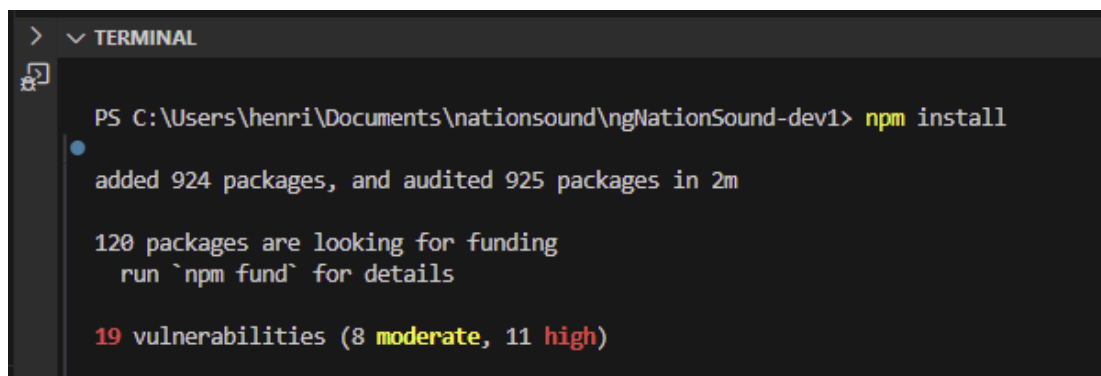


How to install dev1 branch in localhost ?

4. Update file api.service.ts

- Open file 'api.service.ts' in src/data/init folder
- Go to the 'getApiObs' function, comment line 38 and uncomment line 39 and save

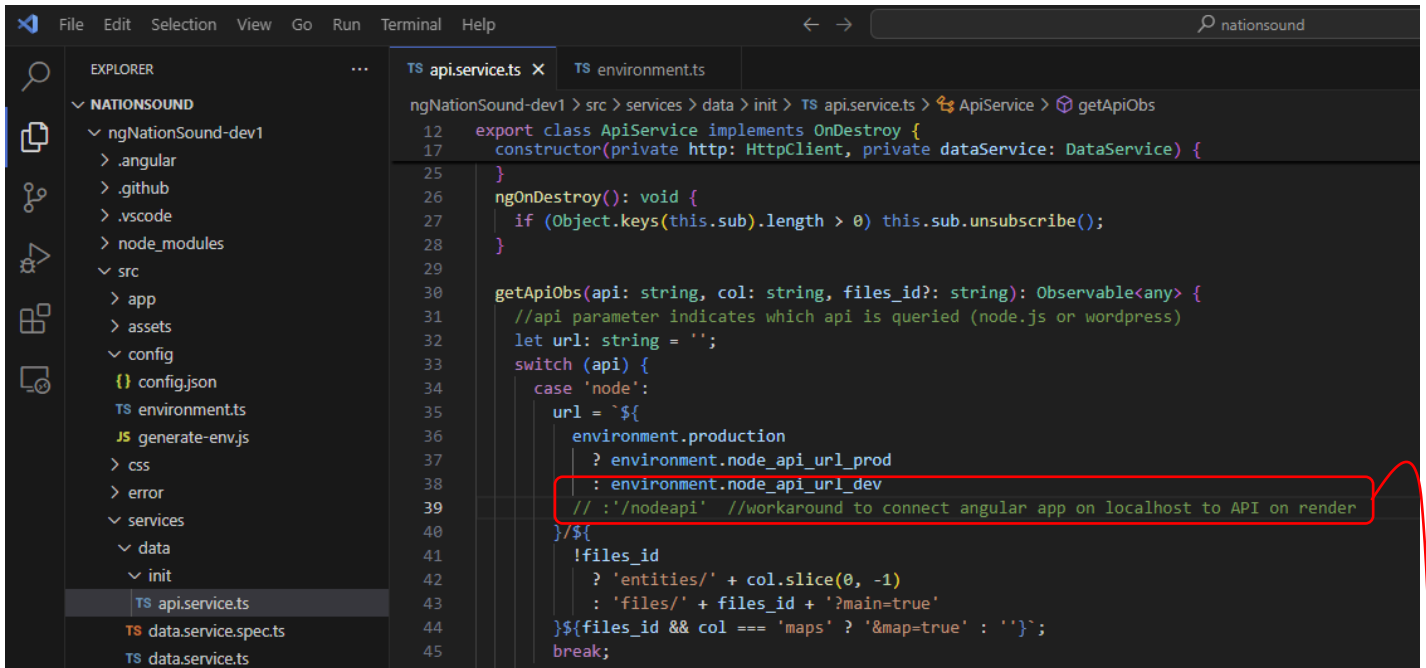


```
ngNationSound-dev1 > src > services > data > init > TS api.service.ts > ApiService > getApiObs
12 export class ApiService implements OnDestroy {
17   constructor(private http: HttpClient, private dataService: DataService) {
25   }
26   ngOnDestroy(): void {
27     if (Object.keys(this.sub).length > 0) this.sub.unsubscribe();
28   }
29
30   getApiObs(api: string, col: string, files_id?: string): Observable<any> {
31     //api parameter indicates which api is queried (node.js or wordpress)
32     let url: string = '';
33     switch (api) {
34       case 'node':
35         url = `${
36           environment.production
37             ? environment.node_api_url_prod
38             : environment.node_api_url_dev
39             // : '/nodeapi' //workaround to connect angular app on localhost to API on render
40         }`;
41         !files_id
42           ? 'entities/' + col.slice(0, -1)
43           : 'files/' + files_id + '?main=true'
44         }`${files_id && col === 'maps' ? '&map=true' : ''}`;
45     break;
```

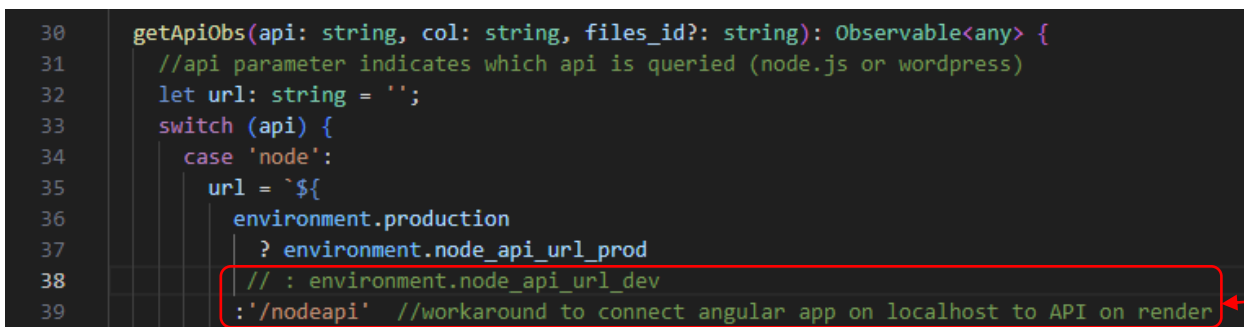

```
30   getApiObs(api: string, col: string, files_id?: string): Observable<any> {
31     //api parameter indicates which api is queried (node.js or wordpress)
32     let url: string = '';
33     switch (api) {
34       case 'node':
35         url = `${
36           environment.production
37             ? environment.node_api_url_prod
38             // : environment.node_api_url_dev
39             : '/nodeapi' //workaround to connect angular app on localhost to API on render
40         }`;
```

5. Set-up environment

- Create 'environment.ts' file in the 'config' folder and populate as follows

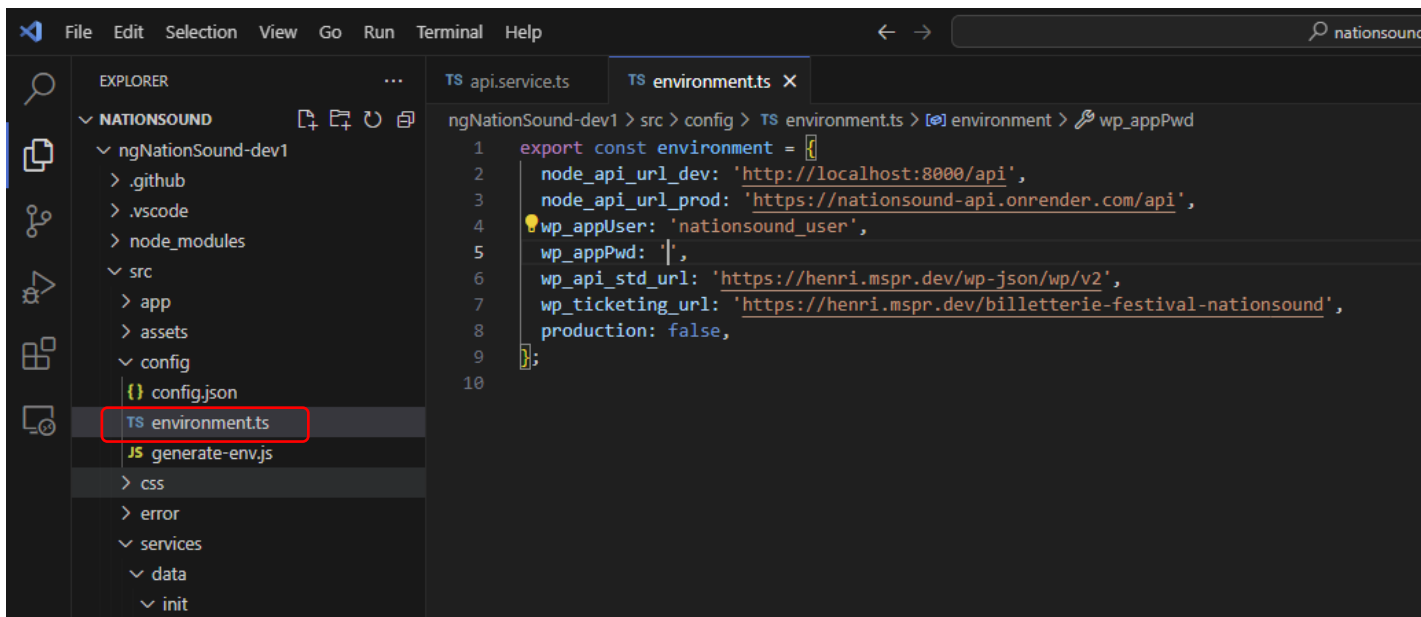

```
ngNationSound-dev1 > src > config > TS environment.ts > environment > wp_appPwd
1 export const environment = {
2   node_api_url_dev: 'http://localhost:8000/api',
3   node_api_url_prod: 'https://nationsound-api.onrender.com/api',
4   wp_appUser: 'nationsound_user',
5   wp_appPwd: '|',
6   wp_api_std_url: 'https://henri.mspr.dev/wp-json/wp/v2',
7   wp_ticketing_url: 'https://henri.mspr.dev/billetterie-festival-nationsound',
8   production: false,
9 };
10
```

How to install dev1 branch in localhost ?

6. Launch the application

- Type `ng serve` + enter in the terminal

```
> ▼ TERMINAL
PS C:\Users\henri\Documents\nationsound\ngNationSound-dev1> ng serve

Initial Chunk Files | Names          | Raw Size
scripts.js          | scripts        | 175.54 kB
main.js             | main           | 129.95 kB
polyfills.js        | polyfills      | 83.46 kB
styles.css          | styles         | 26.78 kB

| Initial Total | 415.73 kB

Application bundle generation complete. [4.372 seconds]
Watch mode enabled. Watching for file changes...
→ Local:  http://localhost:4200/
→ press h + enter to show help
```

- Launch your web browser at <http://localhost:4200>
- Angular app should be running

