



TalKalisker

DHS Visual Improvements — Implementation Roadmap

// client: TalKalisker // date: 2026-04-30 // type: Reference.Roadmap



TalKalisker

[01./overview](#) [02./phases](#) [03./phase_1_detail](#) [04./phase_2_detail](#) [05./phase_3_detail](#) [06./phase_4_detail](#) [07./implementation_notes](#)




 Export PDF

// deliverable: Reference.Roadmap

DHS Visual Improvements — Implementation Roadmap

// client: TalKalisker

// 2026-04-30

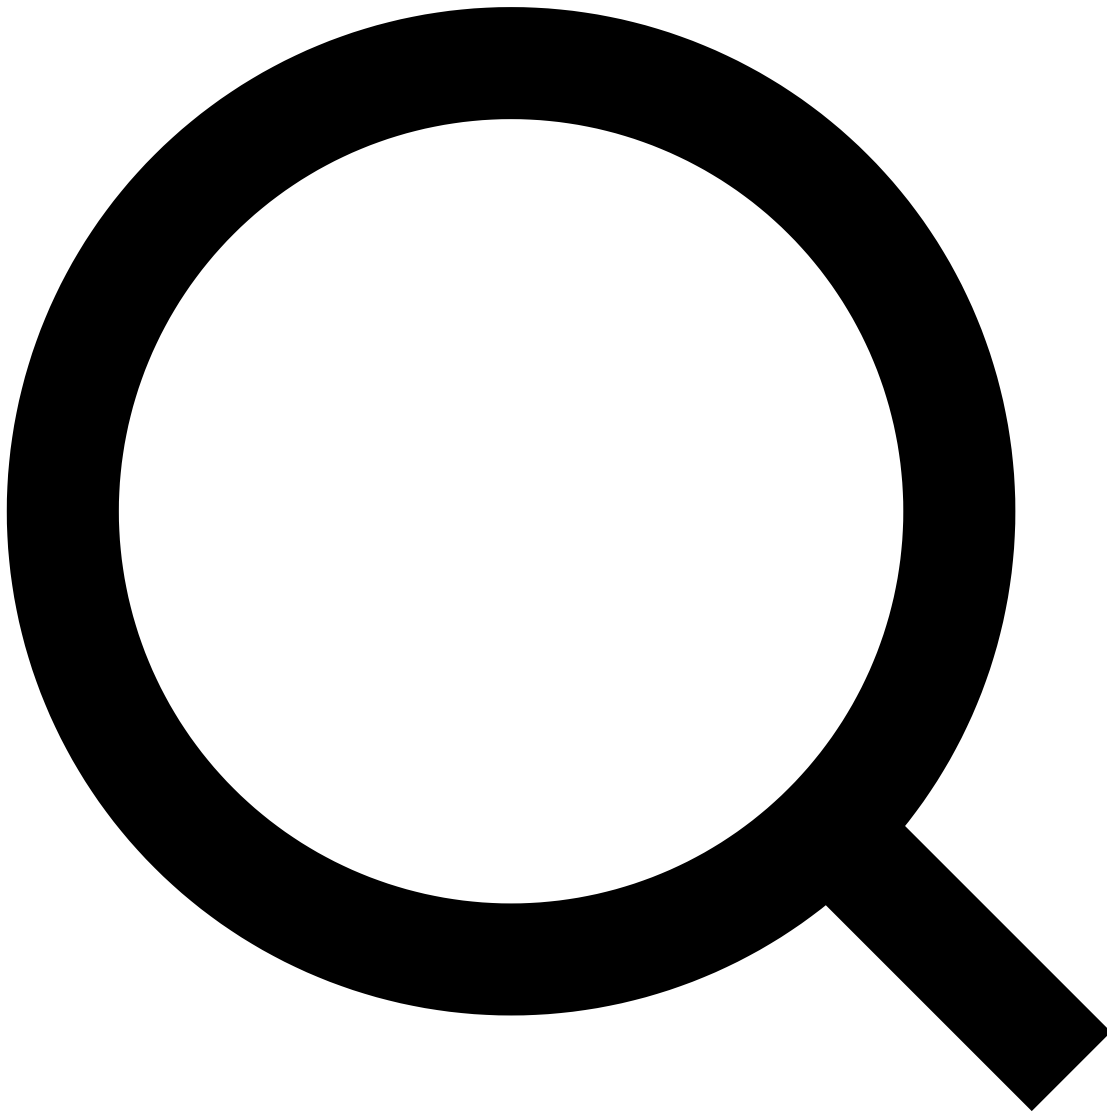

01. /overview

15 visual and UX improvements to the DHS portal shell, organized into 4 delivery phases. Sequenced by impact-to-effort ratio — the first phase alone transforms how every existing and future report feels to open.

All changes live in two files: `_dhs/brand/dashboard_shell.html` (CSS + JS) and `_dhs/scripts/publish.js` (output HTML structure). No source report files need changes. Every improvement applies automatically to all 6 published portals on next rebuild.

Total improvements

15

+15

Files to modify

2

Stable

Reports affected

All (6 current)

Auto-applies on rebuild

Estimated total effort

~15 days

4 phases

02. /phases

Day 1–2

Phase 1 — High-ROI Quick Wins

Scroll spy on sidebar nav — IntersectionObserver highlights active section while reading
Date rendered in report header — Already in meta; surface it below the client line
Hero gradient band — Terracotta-to-transparent sweep behind the report header
Finding card severity left border — Color-coded bar by severity, scannable without reading
Reading progress bar — Thin terracotta line at top of page, fills as user scrolls

Day 3–5

Phase 2 — Card System Upgrades

Interactive action checkboxes — Click toggles Done/Pending in localStorage, no backend
Language switch fade animation — 150ms opacity transition on incoming language block
Language indicator pill — EN / עבר pill shows current language next to the toggle button
Confidential badge — Styled CONFIDENTIAL label in header for encrypted reports
Section intro paragraph — First p per section rendered larger (1.2rem, lighter weight)

Day 6–9

Phase 3 — Filtering & Interactivity

Findings filter bar — All / Critical / High / Medium / Low above finding card groups
Action items filter bar — All / Pending / Blocked / Done above action card groups
Expandable appendix tables — Large tables start collapsed with "Show full table" toggle
Pull quote treatment — Blockquotes styled with large terracotta quote mark, larger type

Day 10–15

Phase 4 — Mobile, Bilingual & Print

Mobile sidebar drawer — Hamburger → slide-in panel below 900px instead of stacking
Swipe language switch — touchstart / touchend detects swipe, cycles languages on mobile
Print one-pager mode — Print-only header with logo + client + date + confidential badge
Section page-break control — page-break-before: always on major sections for clean PDF export

03. /phase_1_detail

5 changes. Combined effect: every report feels intentional the moment it opens.



Scroll Spy — Active Nav Highlighting

dashboard_shell.html JS

Create one IntersectionObserver targeting all h1[id] elements. On intersection, find the matching a[href="#id"] in .sidebar-nav and toggle .active. CSS .nav-link.active already has the accent color and right border — the state just never gets set. No layout changes required.



Date in Report Header

dashboard_shell.html Handlebars template

{{date}} is already in the meta tag. Add <div class="report-date">{{date}}</div> below .report-client in the header markup. Style with the same mono font and accent color as the client line. One Handlebars token, one CSS rule.



Hero Gradient Band

dashboard_shell.html CSS

Add ::before pseudo-element to .report-header. Absolute position, full width, height ~300px, background: linear-gradient(135deg, rgba(184,90,68,0.06) 0%, transparent 70%). pointer-events: none. Zero layout impact — purely visual depth under the title.



Finding Card Severity Left Border

dashboard_shell.html CSS

.finding-card already has .sev-critical, .sev-high, .sev-medium, .sev-low classes on the inner .severity badge. Add border-left: 3px solid to .finding-card based on a data attribute, or add a wrapper class. Alternative: target .finding-card:has(.sev-critical) with :has() CSS — no HTML changes needed if browser support is acceptable (Chrome 105+, Safari 15.4+). Transforms scan time for multi-finding sections from "read every card" to "scan the left edge."



Reading Progress Bar

dashboard_shell.html CSS + JS

Add <div id="progress-bar"></div> at top of <body>. CSS: position: fixed; top: 0; left: 0; height: 3px; background: var(--accent); width: 0%; z-index: 999; transition: width 0.1s. JS scroll listener: width = (scrolly / (documentHeight - viewportHeight)) * 100 + '%'. ~8 lines.

04. /phase_2_detail

5 changes. Makes the portal feel like a living document, not a static PDF.



Interactive Action Card Checkboxes

dashboard_shell.html JS

Action cards already render a `.action-checkbox` div. Add `data-id` attribute (hash of task text) to each checkbox in `publish.js`. On click: toggle a `done` class, save `localStorage.setItem(id, 'done')`. On `DOMContentLoaded`: read `localStorage` and restore states. Client can tick off items as they execute. State survives page refresh. No server, no backend.



Language Switch Fade Animation

dashboard_shell.html CSS + JS

In `setLang()`, instead of `instant display: block/none`, add `.lang-fade-in` class to the incoming block, then remove it after 150ms. CSS: `.lang-fade-in { animation: langFade 150ms ease; } @keyframes langFade { from { opacity: 0; } to { opacity: 1; } }`. Outgoing block hides immediately; incoming block fades in.



Language Indicator Pill

dashboard_shell.html HTML + JS

Add `<span id="lang-indicator">EN</span>` next to the lang toggle button. Style as a small mono pill. In `setLang()`, update `textContent` to `lang.toUpperCase()` or 'עבר' for Hebrew. Always shows current language without hovering over the toggle.



Confidential Badge in Header

dashboard_shell.html Handlebars

Add `{{#if confidential}}<div class="confidential-badge">CONFIDENTIAL</div>{{/if}}` to `.report-header`. CSS: mono font, small, accent-red color (`var(--accent-red)`), faint red background pill. Visible context for client that this is an encrypted deliverable.



Section Intro Paragraph Style

dashboard_shell.html CSS

`section > p:first-of-type { font-size: 1.15rem; font-weight: 300; color: var(--text-primary); line-height: 1.9; }`. No HTML changes. Applies automatically to every section's opening paragraph across all reports. Creates visual hierarchy between the intro sentence and the body content below it.

05. /phase_3_detail

4 changes. Transforms multi-finding audits from walls of cards into filtered, navigable sets.



Findings Filter Bar

dashboard_shell.html JS

After `DOMContentLoaded`, detect any section containing 3+ `.finding-card` elements. Inject a filter bar above that section: `All · Critical · High · Medium · Low`. On click: toggle `.hidden` on cards whose `.severity` badge class doesn't match the selected filter. CSS `.finding-card.hidden { display: none }`. Pure DOM — no changes to `publish.js` or source files.



Action Items Filter Bar

dashboard_shell.html JS

Same pattern as findings filter. Detect sections with 3+ `.action-card` elements. Filter options: `All · Pending · In Progress · Done · Blocked`. Match against `.action-status` text content. Inject filter bar above the group. Single shared utility function handles both filters.



Expandable Appendix Tables

dashboard_shell.html JS

On `DOMContentLoaded`, find all `<table>` elements with more than 8 rows. Wrap rows 5+ in a `<tbody class="table-overflow">` and hide it. Inject a `<tfoot>` button: "Show all N rows !". On click: toggle visibility, update button text. Keeps appendix tables scannable at first glance without losing any data.



Pull Quote Treatment

dashboard_shell.html CSS

`blockquote { position: relative; padding: 1.5rem 1.5rem 1.5rem 3rem; font-size: 1.2rem; font-weight: 300; color: var(--text-primary); border: none; } +blockquote::before { content: ''; position: absolute; left: 0; top: -0.5rem; font-size: 4rem; color: var(--accent); opacity: 0.6; font-family: Georgia, serif; line-height: 1; }`. Transforms bland blockquotes into visible pull quotes.

06. /phase_4_detail

4 changes. Mobile-first delivery and print-ready exports.



Mobile Sidebar Drawer

dashboard_shell.html CSS + JS + HTML

Below 900px: replace the stacked sidebar with a hidden drawer. Add `<button id="nav-toggle">☰</button>` fixed to top-left. CSS: `.sidebar { transform: translateX(-100%); transition: transform 0.3s; position: fixed; z-index: 100; height: 100vh; } + .sidebar.open { transform: translateX(0) }`. Overlay `<div id="nav-overlay">` closes the drawer on tap outside. RTL: mirrors to right side.



Swipe Language Switch

dashboard_shell.html JS

In `DOMContentLoaded`, on touch devices: track `touchstart` X position and `touchend` X position on document. If `delta > 60px` and available languages `> 1`: swipe-left cycles forward, swipe-right cycles backward. Calls existing `toggleLang()`. ~15 lines. No libraries needed.



Print One-Pager Header

dashboard_shell.html CSS

Add a `<div class="print-header">` to the template with logo, client name, report title, date, and confidential badge — all hidden by default (`display: none`). `@media print { .print-header { display: block; margin-bottom: 2rem; border-bottom: 2px solid #000; } .sidebar { display: none; } }`. PDF output becomes self-contained — no logo, date, or client context currently survives print.



Section Page-Break Control

dashboard_shell.html CSS

`@media print { section { page-break-inside: avoid; } section + section { page-break-before: auto; } h1 { page-break-after: avoid; } .finding-card, .action-card, .timeline-node { page-break-inside: avoid; } }`. Prevents cards from splitting mid-content across printed pages. Finding cards already have this — extend it to all card types and section boundaries.

07. /implementation_notes

Strategic DecisionHigh Impact

Implement phases in order

Each phase is designed to be shippable independently. Phase 1 alone justifies a rebuild. Don't wait for Phase 4 to be complete to deploy Phase 1.

Strategic DecisionMedium Impact

All JS in dashboard_shell.html, no external files

DHS portals are self-contained single HTML files. Keep all enhancements inline. No additional script tags, no npm packages for runtime. The CryptoJS CDN is the only external dependency and it stays that way.

Strategic DecisionMedium Impact

CSS-first, JS only when CSS cannot do it

Scroll spy, progress bar, filters, drawer: JS required. Everything else (gradient, borders, typography, animations): pure CSS. Keeps the portal lightweight and functional without JavaScript where possible.

Strategic DecisionHigh Impact

Test in both dark and light themes before shipping each phase

Every color must use CSS variables. No hardcoded hex values in new code. Dark theme is the default and primary — light theme must not be an afterthought. Test the Hebrew RTL layout for Phase 1 and Phase 4 especially.

 Zoomed Evidence

