



TalKalisker

DHS — Client Report Workflow Reference

// client: TalKalisker // date: 2026-04-29 // type: Reference.Workflow



TalKalisker

[01./overview](#) [02./how_to_create_a_report](#) [03./frontmatter_reference](#) [04./card_reference](#) [05./new_card_protocol](#) [06./quick_commands](#)




 Export PDF

// deliverable: Reference.Workflow

DHS — Client Report Workflow Reference

// client: TalKalisker

// 2026-04-29

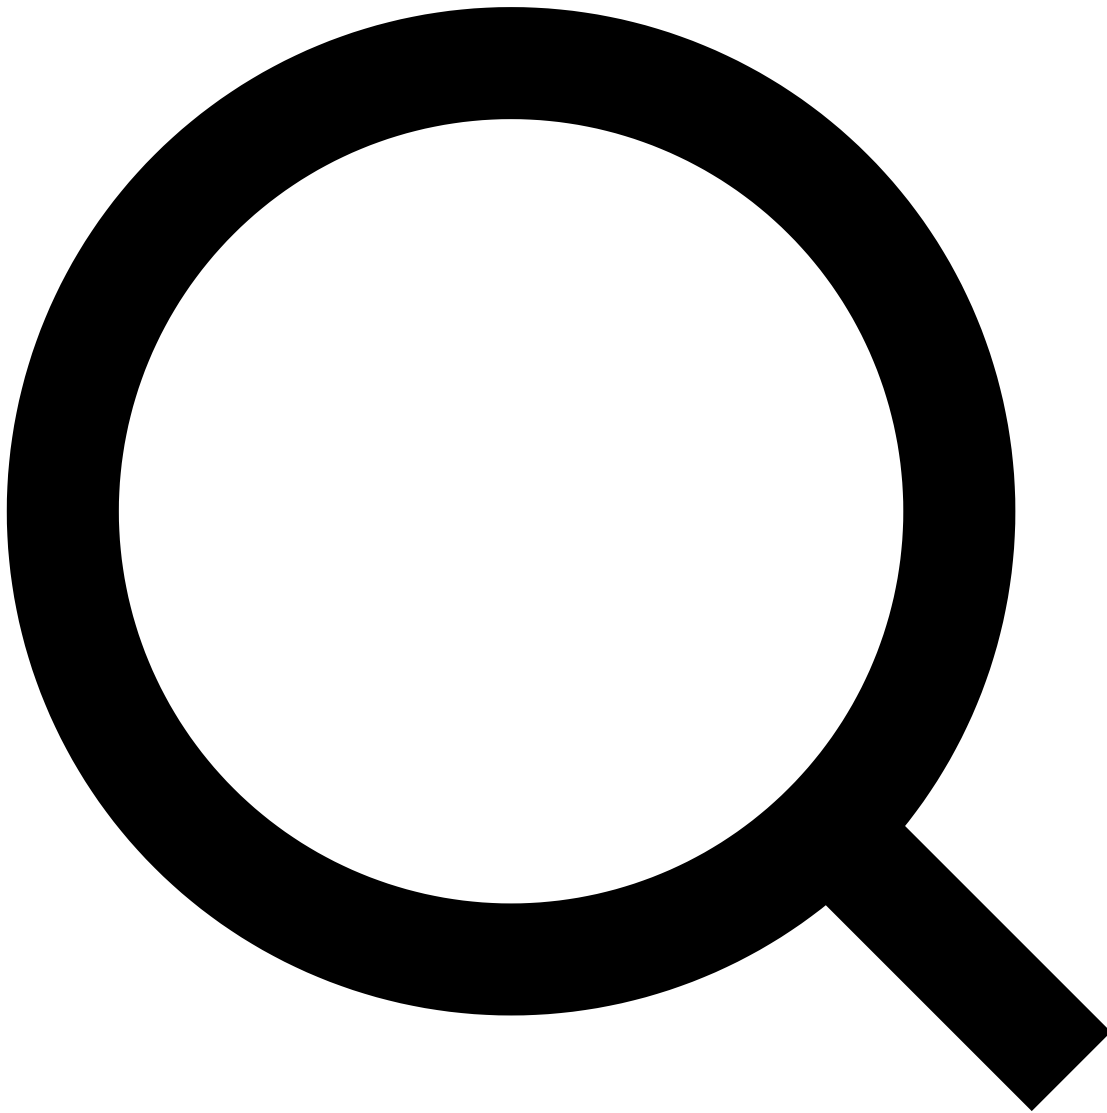

01. /overview

The DHS (Deliverables System) turns an Obsidian markdown file into an encrypted, professional HTML portal — automatically, on every git push.

Obsidian .md → source_reports/ → npm run build → clients/{slug}/ → GitHub Pages

One source file. One command (or one push). Live in minutes.

Reports Live

5

+5

Card Types

10

+1 (Benchmark, Apr 2026)

Languages

3

Stable (EN / ES / HE)

Build Trigger

git push

Automated via CI

02. /how_to_create_a_report



1 — Write the source file

New .md in source_reports/

Paste the frontmatter block from /frontmatter_reference. Fill title, client, project, type, date. Set confidential: true for encrypted reports. Set languages: '["en", "he"]' for bilingual. Write content below the closing ---.



2 — Structure sections and cards

DHS heading + card syntax

Every section: # 01. /slug_name. Slug becomes the sidebar nav link. Cards are inline — see /card_reference. Prose, tables, and images all work. Images go in _dhs/assets/ first, then reference as ![Caption](filename.png).



3 — (Optional) Run the agent for complex source

Raw Obsidian notes → structured DHS

When source is messy notes (callouts, wikilinks, unstructured bullets), use _dhs/agents/dhs-report-publisher.md as your instruction set. Agent handles classification, bilingual structuring, card mapping, and quality checks.



4 — Build the portal

Local or automatic

Local: cd _dhs && npm run build — builds all reports, rebuilds master index.

Auto: Push to main — GitHub Actions runs the build and commits output.



5 — Access and share

talkalisker.com/clients/

Master portal: talkalisker.com/clients/ — password in _dhs/clients.json → _master key.

Individual report: talkalisker.com/clients/{slug}/ — client password from same file.

Delete a report: cd _dhs && node scripts/delete_report.js {slug}

03. /frontmatter_reference

Copy for every new report. Minimum required fields.

```
---
title: "Full Report Title"
client: "Client Name"          # must match _dhs/clients.json for encryption
project: "Project Name"
type: "Audit.UX"               # see types below
date: 2026-04-29
confidential: true             # true = AES-256 encrypted, client password required
languages: '["en"]'           # '["en","he"]' or '["en","es","he"]'
---
```

Report types: Audit.UX · Audit.Technical · Audit.SEO · Proposal.Strategy · Proposal.Naming · Report.Monthly · Report.Handoff · Summary.Meeting · Reference.Workflow

Bilingual structure:

English content here.

04. /card_reference

All 10 card types. Everything after the pipe | is the description body (next line).

Card	Syntax	Use For
Finding	- **Finding:** Title **Severity:** High	Audit issues (Critical / High / Medium / Low)
Proposal	- **Name:** X **Slogan:** Y **Level:** Recommended	Naming options, strategy alternatives
Decision	- **Decision:** Title **Impact:** High	Strategic choices, meeting outcomes
Action	- **Action:** Task **Owner:** Name **Status:** Pending	Tasks (Pending / In Progress / Done / Blocked)
Metric	- **Metric:** Name **Value:** X **Trend:** +10%	KPIs, performance data
Ranking	- **Keyword:** Term **Rank:** 3 **Change:** +2	SEO keyword positions
Swatch	- **Color:** Name **Hex:** #B85A44 **Usage:** Primary	Brand color documentation
Deliverable	* **Deliverable:** Name **Details:** Subtitle	Scope items, workflow steps (use * not -)
Signature	- **Signature:** Full Name **Role:** Title	Approval sign-off lines
Benchmark	- **Benchmark:** Institution **Metric:** Key Stat	Industry comparisons with evidence
Timeline	`` timeline fenced block	Roadmaps, recovery phases, project sequences

Timeline — live demo of the syntax:

Week 1–2

Phase 1 Example

First item — Description of what happens in this step

Second item — Another deliverable or milestone in this phase

Month 1–2

Phase 2 Example

First item — Description

Second item — Description

Add a description paragraph on the next line after any card (except Timeline) — it renders inside the card.

Hebrew equivalents: ממצא · מודד · החלטה · פעולה · תוצר · מידוד

05. /new_card_protocol

When content doesn't fit any of the 10 cards, build a new one. Four files to touch:

Add regex to `\_dhs/scripts/publish.js`

Tal

Pending

Inside `parseMarkdownContent()`, before the Deliverable block. Pattern: - **NewField:** value | **Secondary:** value + description lines. Follow existing card regex structure.

Add CSS to `\_dhs/brand/dashboard\_shell.html`

Tal

Pending

In the `<style>` block, after `.signature-card`. Use existing CSS variables only — `var(--bg-surface)`, `var(--accent)`, `var(--text-primary)`. No hardcoded colors.

Add example to matching template in `\_dhs/templates/`

Tal

Pending

Add syntax example with a comment explaining when to use it.

Register in `\_dhs/agents/dhs-report-publisher.md` § Card Registry

Tal

Pending

One row in the table: card name, primary field trigger, use case.

06. /quick_commands

```
# Build all reports
cd _dhs && npm run build
```

```
# Build one report
cd _dhs && node scripts/publish.js source_reports/Filename.md clients/output-slug/
```

```
# Delete a report + rebuild master index
cd _dhs && node scripts/delete_report.js report-slug-name
```

```
# Add new client password → edit clients.json, then rebuild
```

Portals:

- Master index: `talkalisker.com/clients/` → password: `_master` in `clients.json`
- Per-client: password = client name key in `clients.json`
- Override per-report: add password: "custom" to `frontmatter`

 Zoomed Evidence

