



TalKalisker

DHS — Client Report Workflow Reference

// client: TalKalisker // date: 2026-04-29 // type: Reference.Workflow



TalKalisker

[01./overview](#) [02./how to create a report](#) [03./frontmatter reference](#) [04./card reference](#) [05./new card protocol](#) [06./quick commands](#)




 Export PDF

// deliverable: Reference.Workflow

## DHS — Client Report Workflow Reference

// client: TalKalisker

// 2026-04-29

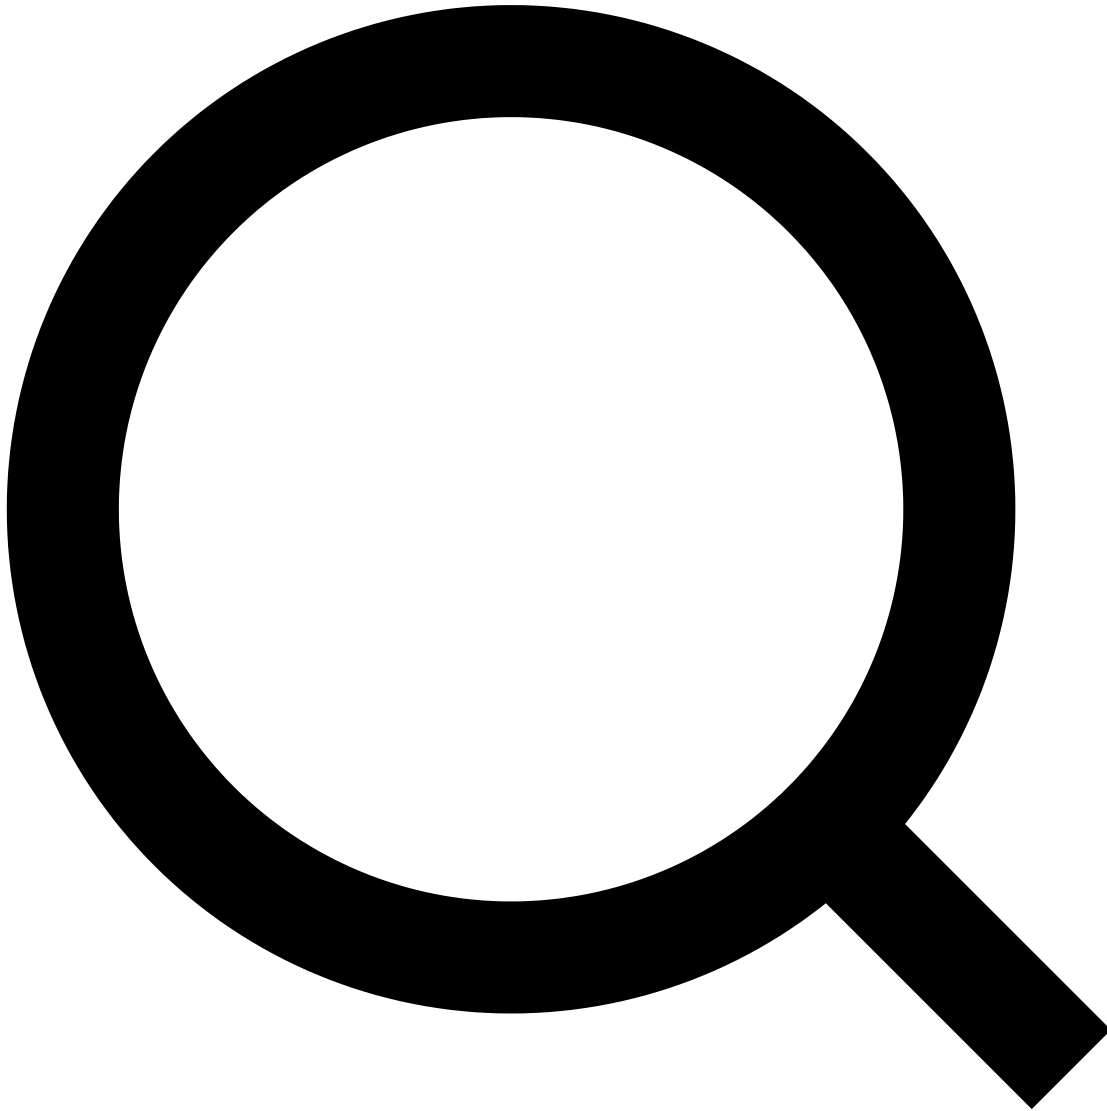

## 01. /overview

The DHS (Deliverables System) turns an Obsidian markdown file into an encrypted, professional HTML portal — automatically, on every git push.

Obsidian .md → source\_reports/ → npm run build → clients/{slug}/ → GitHub Pages

One source file. One command (or one push). Live in minutes.

Reports Live

5

+5

Card Types

10

+1 (Benchmark, Apr 2026)

Languages

3

Stable (EN / ES / HE)

Build Trigger

git push

Automated via CI

## 02. /how\_to\_create\_a\_report



## 1 — Write the source file

New .md in source\_reports/

Paste the frontmatter block from /frontmatter\_reference. Fill title, client, project, type, date. Set confidential: true for encrypted reports. Set languages: '["en", "he"]' for bilingual. Write content below the closing ---.



## 2 — Structure sections and cards

DHS heading + card syntax

Every section: # 01. /slug\_name. Slug becomes the sidebar nav link. Cards are inline — see /card\_reference. Prose, tables, and images all work. Images go in \_dhs/assets/ first, then reference as ![Caption](filename.png).



## 3 — (Optional) Run the agent for complex source

Raw Obsidian notes → structured DHS

When source is messy notes (callouts, wikilinks, unstructured bullets), use \_dhs/agents/dhs-report-publisher.md as your instruction set. Agent handles classification, bilingual structuring, card mapping, and quality checks.



## 4 — Build the portal

Local or automatic

**Local:** cd \_dhs && npm run build — builds all reports, rebuilds master index.

**Auto:** Push to main — GitHub Actions runs the build and commits output.



## 5 — Access and share

[talkalisker.com/clients/](https://talkalisker.com/clients/)

Master portal: talkalisker.com/clients/ — password in \_dhs/clients.json → \_master key.

Individual report: talkalisker.com/clients/{slug}/ — client password from same file.

Delete a report: cd \_dhs && node scripts/delete\_report.js {slug}

# 03. /frontmatter\_reference

Copy for every new report. Minimum required fields.

```
---
title: "Full Report Title"
client: "Client Name"          # must match _dhs/clients.json for encryption
project: "Project Name"
type: "Audit.UX"               # see types below
date: 2026-04-29
confidential: true              # true = AES-256 encrypted, client password required
languages: '["en"]'            # '["en","he"]' or '["en","es","he"]'
---
```

**Report types:** Audit.UX · Audit.Technical · Audit.SEO · Proposal.Strategy · Proposal.Naming · Report.Monthly · Report.Handoff · Summary.Meeting · Reference.Workflow

**Bilingual structure:**

English content here.

# 04. /card\_reference

All 10 card types. Everything after the pipe | is the description body (next line).

| Card        | Syntax                                                     | Use For                                        |
|-------------|------------------------------------------------------------|------------------------------------------------|
| Finding     | - **Finding:** Title   **Severity:** High                  | Audit issues (Critical / High / Medium / Low)  |
| Proposal    | - **Name:** X   **Slogan:** Y   **Level:** Recommended     | Naming options, strategy alternatives          |
| Decision    | - **Decision:** Title   **Impact:** High                   | Strategic choices, meeting outcomes            |
| Action      | - **Action:** Task   **Owner:** Name   **Status:** Pending | Tasks (Pending / In Progress / Done / Blocked) |
| Metric      | - **Metric:** Name   **Value:** X   **Trend:** +10%        | KPIs, performance data                         |
| Ranking     | - **Keyword:** Term   **Rank:** 3   **Change:** +2         | SEO keyword positions                          |
| Swatch      | - **Color:** Name   **Hex:** #B85A44   **Usage:** Primary  | Brand color documentation                      |
| Deliverable | * **Deliverable:** Name   **Details:** Subtitle            | Scope items, workflow steps (use * not -)      |
| Signature   | - **Signature:** Full Name   **Role:** Title               | Approval sign-off lines                        |
| Benchmark   | - **Benchmark:** Institution   **Metric:** Key Stat        | Industry comparisons with evidence             |
| Timeline    | ````timeline fenced block                                  | Roadmaps, recovery phases, project sequences   |

**Timeline** — live demo of the syntax:

Week 1–2

## Phase 1 Example

**First item** — Description of what happens in this step

**Second item** — Another deliverable or milestone in this phase

Month 1–2

## Phase 2 Example

**First item** — Description

**Second item** — Description

Add a description paragraph on the next line after any card (except Timeline) — it renders inside the card.

**Hebrew equivalents:** ממצא · מודד · החלטה · פעולה · תוצר · מידוד

# 05. /new\_card\_protocol

When content doesn't fit any of the 10 cards, build a new one. Four files to touch:

Add regex to `\_dhs/scripts/publish.js`

Tal

Pending

Inside `parseMarkdownContent()`, before the Deliverable block. Pattern: - **NewField:** value | **Secondary:** value + description lines. Follow existing card regex structure.

Add CSS to `\_dhs/brand/dashboard\_shell.html`

Tal

Pending

In the `<style>` block, after `.signature-card`. Use existing CSS variables only — `var(--bg-surface)`, `var(--accent)`, `var(--text-primary)`. No hardcoded colors.

Add example to matching template in `\_dhs/templates/`

Tal

Pending

Add syntax example with a comment explaining when to use it.

Register in `\_dhs/agents/dhs-report-publisher.md` § Card Registry

Tal

Pending

One row in the table: card name, primary field trigger, use case.

# 06. /quick\_commands

```
# Build all reports
cd _dhs && npm run build
```

```
# Build one report
cd _dhs && node scripts/publish.js source_reports/Filename.md clients/output-slug/
```

```
# Delete a report + rebuild master index
cd _dhs && node scripts/delete_report.js report-slug-name
```

```
# Add new client password → edit clients.json, then rebuild
```

### Portals:

- Master index: `talkalisker.com/clients/` → password: `_master` in `clients.json`
- Per-client: password = client name key in `clients.json`
- Override per-report: add password: "custom" to frontmatter

 Zoomed Evidence

