

Schema documentation for scenario_family_ratings.xsd

september 16, 2012


Table of Contents

Resource hierarchy:	1
Namespace: "http://github.com/talkasab/assayer_process"	1
Schema(s)	1
Main schema scenario_family_ratings.xsd	1
Included schema uuid_attribute.xsd	1
Element(s)	1
Element a:scenario_family_ratings	1
Element a:scenario_ratings	2
Element a:rater_data	2
Element a:item_rating	3
Element a:uuid	3
Simple Type(s)	3
Simple Type a:uuidPattern	3
Attribute Group(s)	3
Attribute Group a:at_uuid	3
Namespace: ""	4
Attribute(s)	4
Attribute a:item_rating / @item_id	4
Attribute a:item_rating / @rating	4
Attribute a:rater_data / @rater_uuid	4
Attribute a:scenario_ratings / @scenario_uuid	4
Attribute a:at_uuid / @uuid	4
Attribute a:scenario_family_ratings / @scenario_family_uuid	5

Resource hierarchy:

Legend:  Import,  Include,  Redefine,  Cycle detected

scenario_family_ratings.xsd

 uuid_attribute.xsd

Namespace: "http://github.com/talkasab/assayer_process"

Schema(s)

Main schema scenario_family_ratings.xsd

Namespace	http://github.com/talkasab/assayer_process	
Properties	attribute form default:	unqualified
	element form default:	qualified

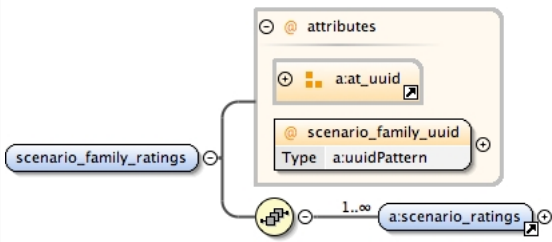
Included schema uuid_attribute.xsd

Namespace	http://github.com/talkasab/assayer_process	
Properties	attribute form default:	unqualified
	element form default:	qualified

Element(s)

Element a:scenario_family_ratings

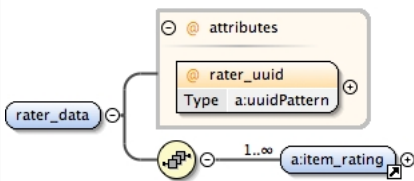
Namespace	http://github.com/talkasab/assayer_process
-----------	--

Diagram					
Properties	content:	complex			
Model	a:scenario_ratings+				
Children	a:scenario_ratings				
Instance	<pre><a:scenario_family_ratings scenario_family_uuid=" " uuid=" " xmlns:a="http://github.com/talkasab/assayer_process"> <a:scenario_ratings scenario_uuid=" ">{1,unbounded}</a:scenario_ratings> </a:scenario_family_ratings></pre>				
Attributes	QName	Type	Fixed	Default	Use
	scenario_family_uuid	a:uuidPattern			required
	uuid	a:uuidPattern			required

Element a:scenario_ratings

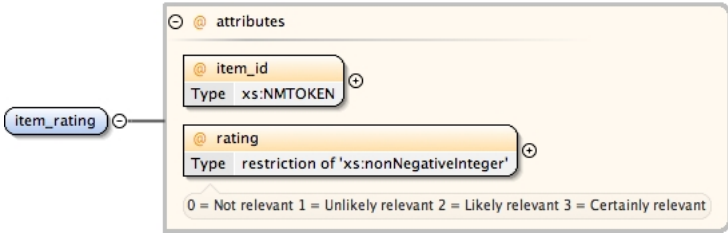
Namespace	http://github.com/talkasab/assayer_process				
Diagram					
Properties	content:	complex			
Used by	Element	a:scenario_family_ratings			
Model	a:rater_data+				
Children	a:rater_data				
Instance	<pre><a:scenario_ratings scenario_uuid=" " xmlns:a="http://github.com/talkasab/assayer_process"> <a:rater_data rater_uuid=" ">{1,unbounded}</a:rater_data> </a:scenario_ratings></pre>				
Attributes	QName	Type	Fixed	Default	Use
	scenario_uuid	a:uuidPattern			required

Element a:rater_data


Namespace	http://github.com/talkasab/assayer_process		
Diagram			
Properties	content:	complex	
Used by	Element	a:scenario_ratings	
Model	a:item_rating+		
Children	a:item_rating		
Instance	<pre><a:rater_data rater_uuid=" " xmlns:a="http://github.com/talkasab/assayer_process"> <a:item_rating item_id=" " rating=" ">{1,unbounded}</a:item_rating> </a:rater_data></pre>		

Attributes	QName	Type	Fixed	Default	Use
	rater_uuid	a:uuidPattern			required

Element a:item_rating


Namespace	http://github.com/talkasab/assayer_process				
Diagram					
Properties	content:	complex			
Used by	Element	a:rater_data			
Attributes	QName	Type	Fixed	Default	Use
	item_id	xs:NMTOKEN			required
	rating	restriction of xs:nonNegativeInteger			required
		0 = Not relevant 1 = Unlikely relevant 2 = Likely relevant 3 = Certainly relevant			

Element a:uuid

Namespace	http://github.com/talkasab/assayer_process				
Diagram					
Properties	content:	complex			
Attributes	QName	Type	Fixed	Default	Use
	uuid	a:uuidPattern			required

Simple Type(s)


Simple Type a:uuidPattern

Namespace	http://github.com/talkasab/assayer_process				
Diagram					
Type	restriction of xs:string				
Facets	pattern	$[a-f0-9]\{8\}-[a-f0-9]\{4\}-[a-f0-9]\{4\}-[a-f0-9]\{12\}$			
Used by	Attributes	a:at_uuid/@uuid, a:rater_data/@rater_uuid, a:scenario_family_ratings/@scenario_family_uuid, a:scenario_ratings/@scenario_uuid			

Attribute Group(s)

Attribute Group a:at_uuid

Namespace	http://github.com/talkasab/assayer_process				
-----------	--	--	--	--	--

Diagram					
Used by	Elements a:scenario_family_ratings, a:uuid				
Attributes	QName	Type	Fixed	Default	Use
	uuid	a:uuidPattern			required

Namespace: ""

Attribute(s)

Attribute a:item_rating / @item_id

Namespace	No namespace				
Type	xs:NMTOKEN				
Properties	use:	required			
Used by	Element	a:item_rating			

Attribute a:item_rating / @rating

Namespace	No namespace				
Annotations	0 = Not relevant 1 = Unlikely relevant 2 = Likely relevant 3 = Certainly relevant				
Type	restriction of xs:nonNegativeInteger				
Properties	use:	required			
Facets	maxInclusive	3			
Used by	Element	a:item_rating			

Attribute a:rater_data / @rater_uuid

Namespace	No namespace				
Type	a:uuidPattern				
Properties	use:	required			
Facets	pattern	[a-f0-9]{8}-[a-f0-9]{4}-[a-f0-9]{4}-[a-f0-9]{4}-[a-f0-9]{12}			
Used by	Element	a:rater_data			

Attribute a:scenario_ratings / @scenario_uuid

Namespace	No namespace				
Type	a:uuidPattern				
Properties	use:	required			
Facets	pattern	[a-f0-9]{8}-[a-f0-9]{4}-[a-f0-9]{4}-[a-f0-9]{4}-[a-f0-9]{12}			
Used by	Element	a:scenario_ratings			

Attribute a:at_uuid / @uuid

Namespace	No namespace				
Type	a:uuidPattern				
Properties	use:	required			

Facets	pattern	[a-f0-9]{8}-[a-f0-9]{4}- [a-f0-9]{4}-[a-f0-9]{4}- [a-f0-9]{12}
Used by	Attribute Group	a:at_uuid

Attribute a:scenario_family_ratings / @scenario_family_uuid

Namespace	No namespace	
Type	a:uuidPattern	
Properties	use:	required
Facets	pattern	[a-f0-9]{8}-[a-f0-9]{4}- [a-f0-9]{4}-[a-f0-9]{4}- [a-f0-9]{12}
Used by	Element	a:scenario_family_ratings