

a Grouping strategies

Exhaustive hypothesis testing

Maree et al. 2024 · $(A!)^C$ per frame




Greedy per-view assignment

LUC3D · C Hungarian solves, $O(C \cdot A^3)$



b Hypotheses per frame


2 cameras
4 cameras
6 cameras
8 cameras

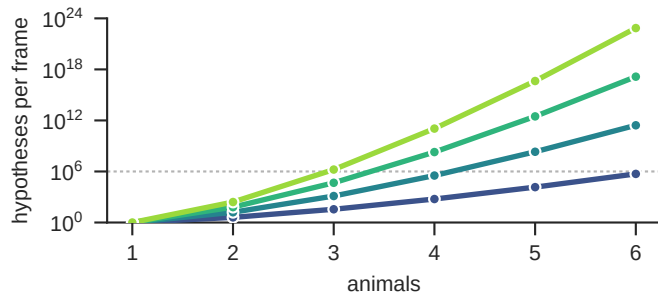

c Grouping accuracy, head to head

exhaustive

LUC3D greedy, fresh anchor

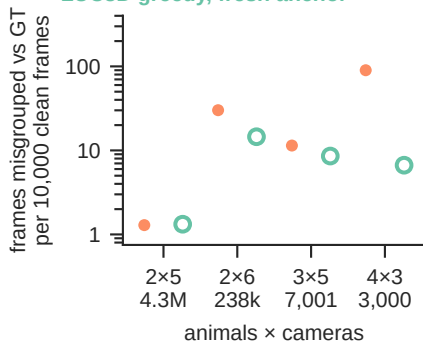


d 3D-term ablation

ID-switch rate

cross-view IDF1

filled: shipped tracker
hollow: fresh anchor

ID switches per
100,000 camera-frames

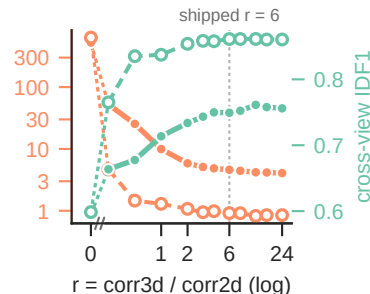

e Time per frame

