




## a Protocol

### 1 label 2 anchor views




### 2 triangulate




### 3D from the 2 anchors



### 3 reprojections appear



### 4 accept or nudge



### 2-anchor solve, this frame

anchor views 1.4–4.5 px


the other 6 2.5–24.6 px

dotted = reprojected

solid = detected


## b Placements vs rig size

traditional  
reprojection-aided

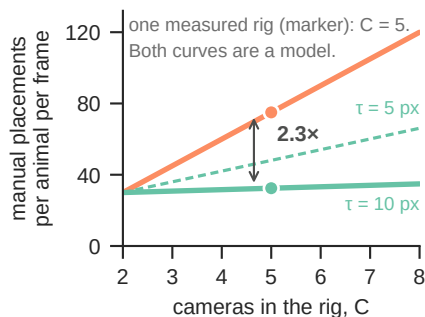


## c Cost of two anchors

— vs the view's own detection  
-- vs the reference 3D

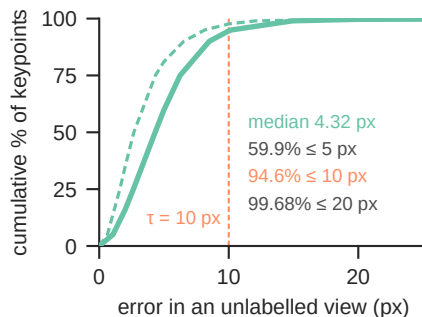

## d Anchor-pair geometry

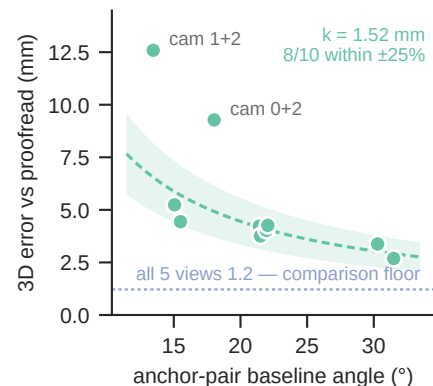

a: the app on an 8-camera recording (a different rig from b-d). b, c, d: all 50 proofread BMimica sessions, 5 cameras, 2 mice, 15 nodes, 1,277,424 keypoints.

Every session enters every panel: 38,322,720 held-out view measurements in c; 12,774,240 two-anchor solves in d. See caption.