





a Protocol



1. Label 2 anchor views




2. Triangulate



3. Reprojections appear



4. Accept or nudge



2-anchor solve, this frame

anchor views 1.4–4.5 px

the other 6 2.5–24.6 px

dotted = reprojected

solid = detected

b Placements vs rig size


labels needed, $C \times N$ (assumed)

free by reprojection, $\tau = 10$ px

free by reprojection, $\tau = 5$ px

one measured rig (marker): $C = 5$.


Both curves are a model.

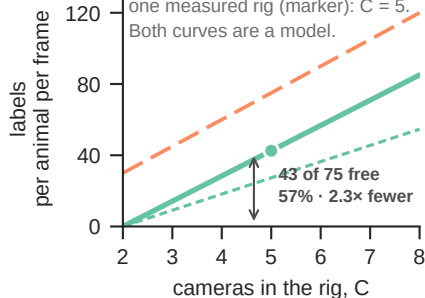

c Cost of two anchors

— vs the view's own detection

-- vs the reference 3D

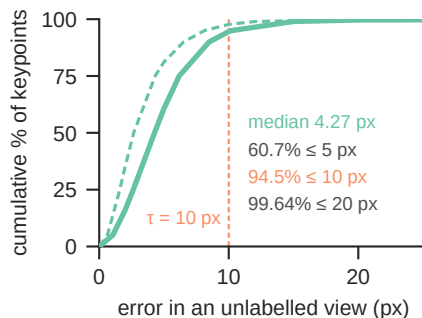

d Anchor-pair geometry

