

a

Exhaustive hypothesis testing

Maree et al. 2024 · $(A!)^C$ per frame



every grouping triangulated + scored

one kept: lowest reprojection error

Greedy per-view assignment


LUC3D · C Hungarian solves, $O(C \cdot A^3)$




each camera assigned once, then committed

targets updated before the next camera


b

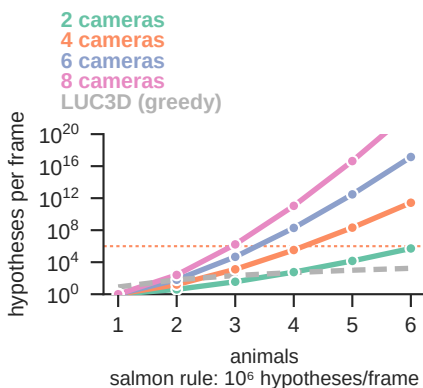


c

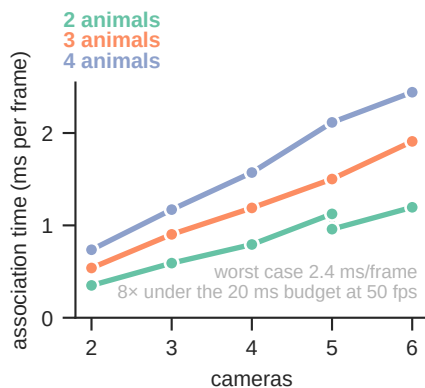

d

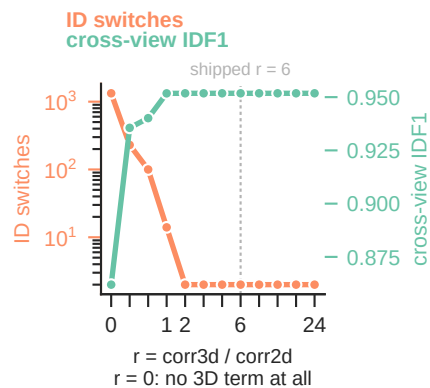

e

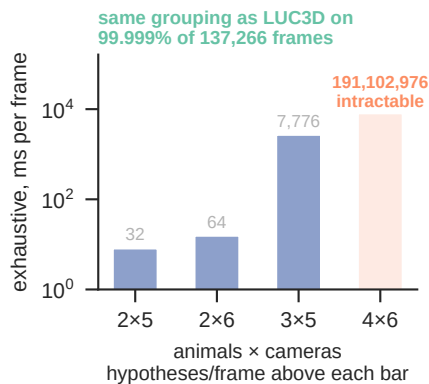

b: exact arithmetic. c: measured by scripts/bench/bench_crossview.mjs. d: 8 BMimica sessions, a fixed 6,000-frame leading window per cell, identical across all 24 cells.

e: exhaustive is our reimplement of the published per-frame procedure. IDF1 and ID-switches via motmetrics on a shared identity-stripped pool.