



a

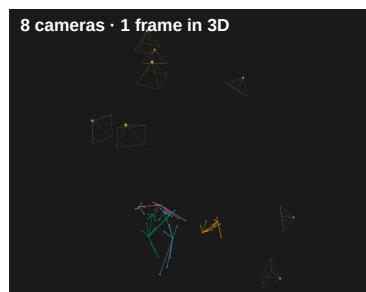


b

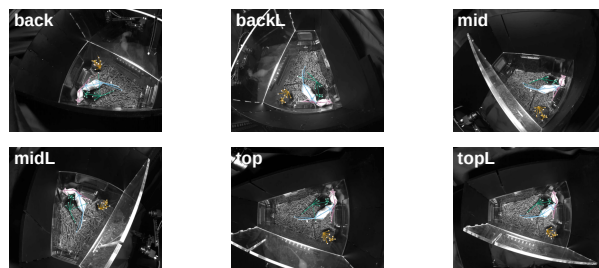


one frame, six cameras - SLAP-2M

c

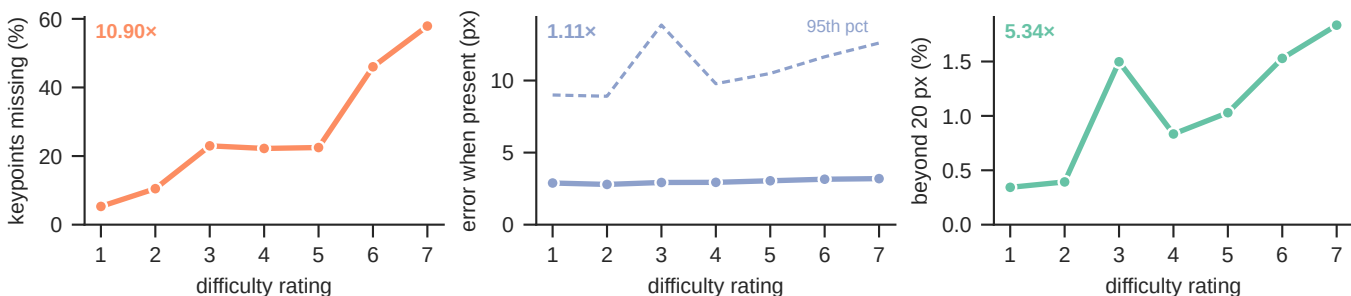

d

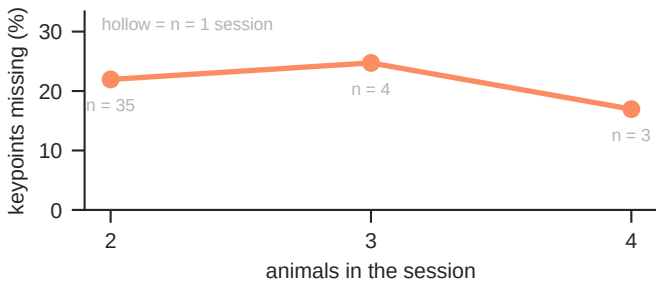

e

	cameras	animals	sessions with 3D	frames	hours
BMimica	5	2	56/56	10,084,734	18.7 @150 fps
SLAP-2M	8	1-4	74/84	1,954,440	10.9 @50 fps
total			130	12,039,174	29.5

f

Difficulty	Sessions	Keypoints	Missing (%)	Error p50 (px)	Error p95 (px)	> 20 px (%)
1	12	252,265	5.3	2.89	9.00	0.34
2	13	342,287	10.5	2.79	8.91	0.39
3	9	229,072	23.0	2.93	13.85	1.50
4	13	245,731	22.2	2.94	9.78	0.83
5	10	273,748	22.5	3.04	10.49	1.03
6	4	91,922	46.0	3.15	11.65	1.53
7	13	126,890	57.9	3.19	12.60	1.83

a, b: one SLAP-2M session. c, d, f: 74 SLAP-2M sessions, 1,561,915 keypoints, raw detections from the benchmark's shared identity-stripped pool, matched per frame against the proofread 3D reprojected into each camera. e: both corpora, read from the files.