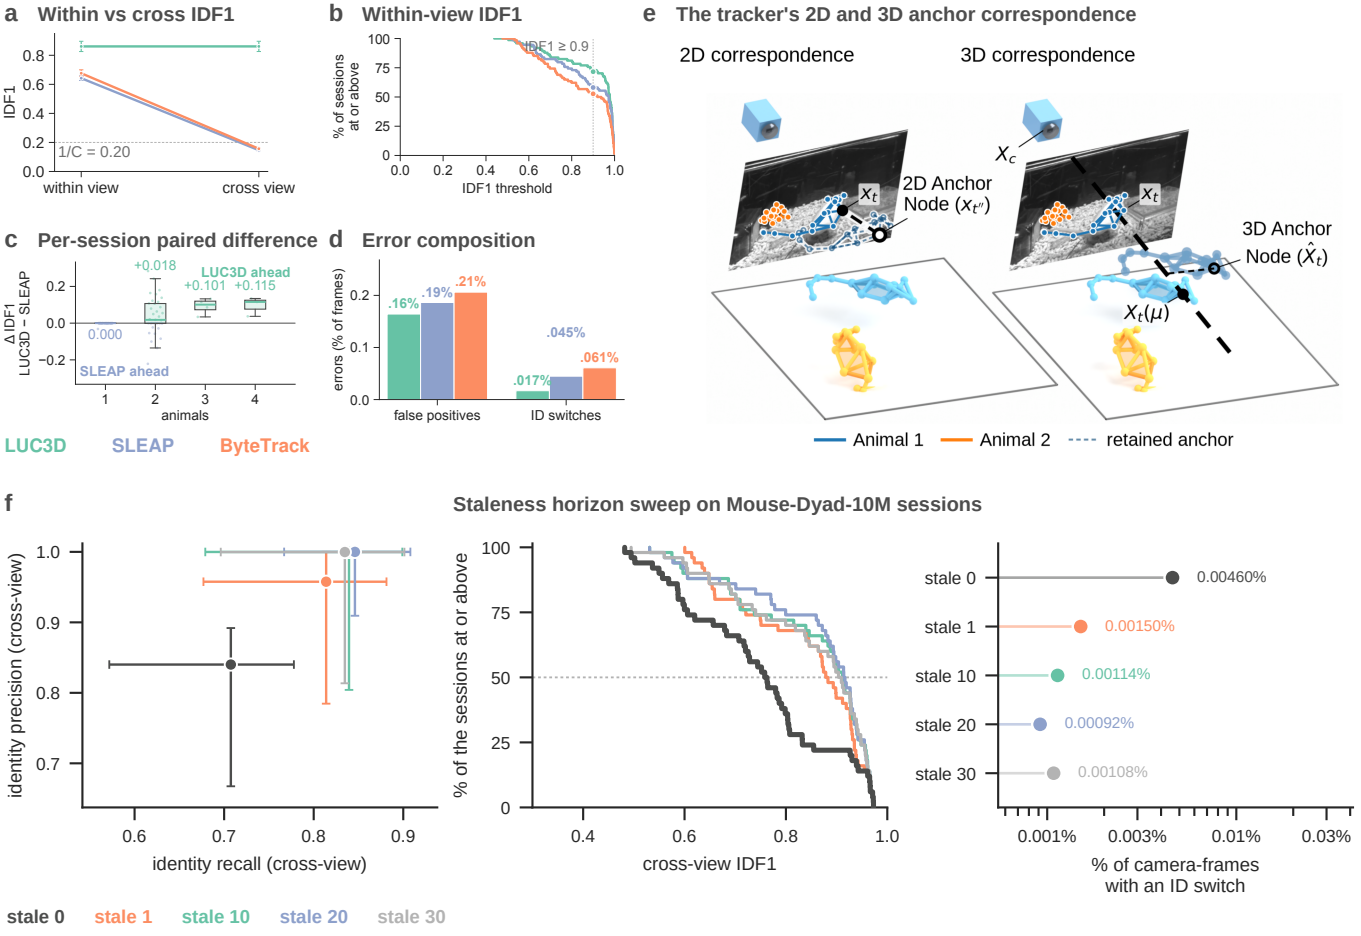

a
Within vs cross IDF1
IDF1
1/C = 0.20
within view
cross view
b
Within-view IDF1
% of sessions at or above
IDF1 ≥ 0.9
IDF1 threshold
c
Per-session paired difference
ΔIDF1 LUC3D − SLEAP
+0.018
LUC3D ahead
+0.101 +0.115
0.000
SLEAP ahead
animals
d
Error composition
errors (% of frames)
.16%
.19%
.21%
.045%
.017%
.061%
false positives
ID switches
LUC3D
SLEAP
ByteTrack
e
The tracker's 2D and 3D anchor correspondence
2D correspondence
3D correspondence
2D Anchor Node ($x_{t'}$)
3D Anchor Node ($\hat{X}_t$)
X_c
x_t
$X_t(\mu)$
Animal 1
Animal 2
retained anchor
f
Staleness horizon sweep on Mouse-Dyad-10M sessions
identity precision (cross-view)
identity recall (cross-view)
% of the sessions at or above
cross-view IDF1
stale 0
stale 1
stale 10
stale 20
stale 30
0.00460%
0.00150%
0.00114%
0.00092%
0.00108%
% of camera-frames with an ID switch