




a Rig and 3D

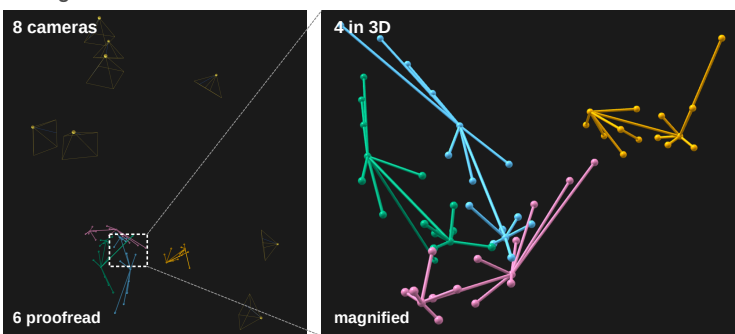


b One frame, six cameras

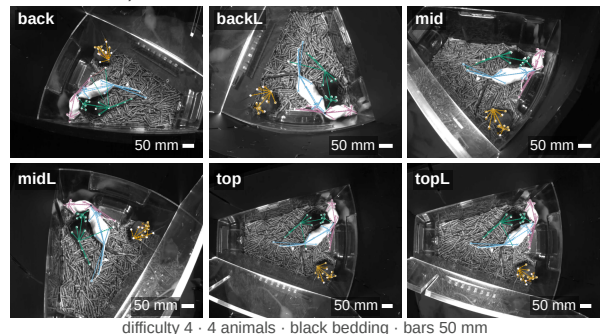


c Missing keypoints vs difficulty and cameras

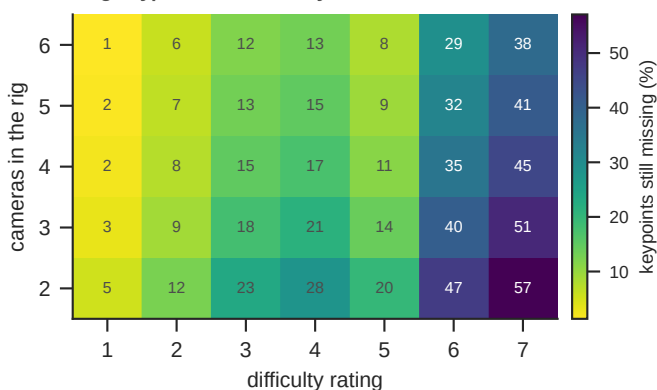

d Animal-count control

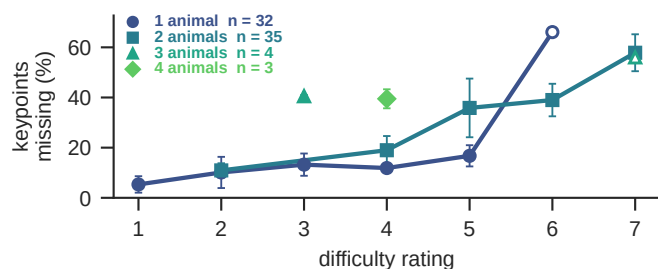


e Per-camera detection quality

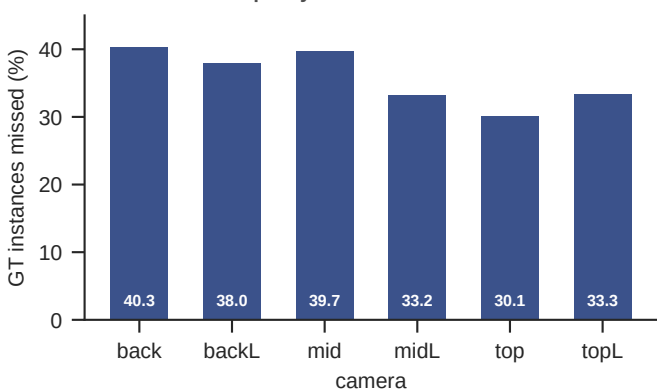

f Corpora

	BMimica	SLAP-2M	Total
Cameras	5	8 (6 proofread)	—
Animals	2	1–4	1–4
Sessions with 3D	56 of 56	74 of 74	130 of 130
Frames	10,084,734	1,954,440	12,039,174
Hours	18.7 @150 fps	10.9 @50 fps	29.6
Nodes	15	15	15

g Detection quality

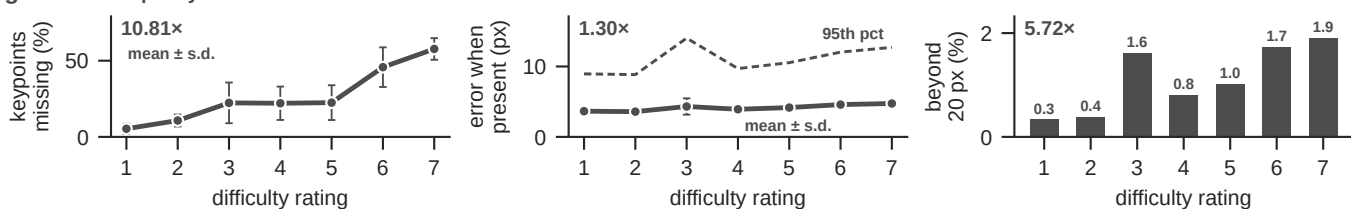

±1 s.d. between sessions · n = 12, 13, 9, 13, 10, 4, 13 sessions at difficulty 1–7

h Difficulty strata

Difficulty	Sessions	Keypoints	Animals	Bedding (black/white)	Missing (%)	Error mean (px)	Error p95 (px)	Error p99 (px)	> 20 px (%)
1	12	30,199,536	1	12/0	5.3	3.65	8.95	14.45	0.33
2	13	40,786,166	1, 2	8/5	10.7	3.59	8.84	14.58	0.38
3	9	27,668,941	1, 3	4/5	22.3	4.32	14.02	22.49	1.61
4	13	29,355,207	1, 2, 4	6/7	22.1	3.92	9.70	18.38	0.80
5	10	32,791,049	1, 2	6/4	22.5	4.16	10.54	20.48	1.02
6	4	11,091,948	1, 2	1/3	45.8	4.59	12.04	26.42	1.72
7	13	15,241,535	2, 3	7/6	57.7	4.74	12.71	27.77	1.90