

a Grouping strategies

Exhaustive hypothesis testing

Maree et al. 2024 · (A!)^C per frame



every grouping triangulated + scored

one kept: lowest reprojection error

Greedy per-view assignment

LUC3D · C Hungarian solves, $O(C \cdot A^3)$




each camera assigned once, then committed


targets updated before the next camera

b Association cost


Cost per (target, detection) pair

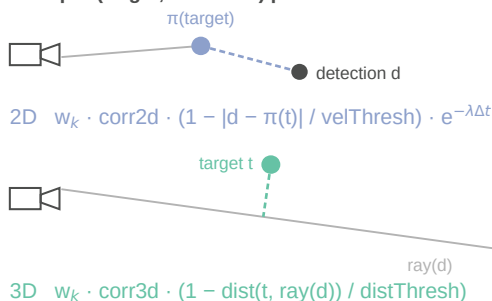


c Hypotheses per frame

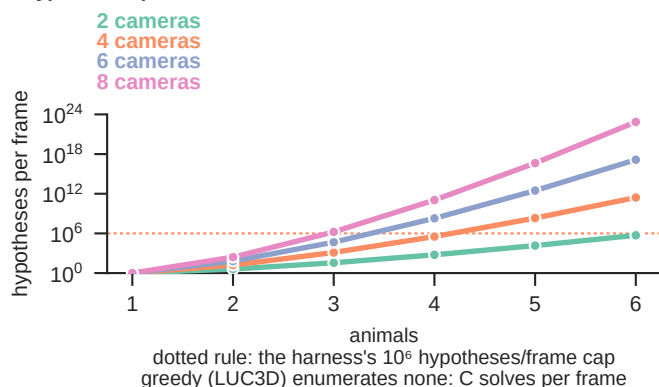


d Association runtime

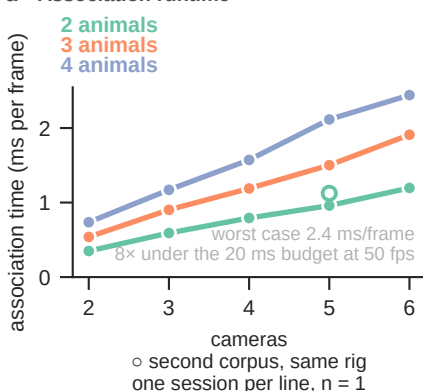

e 3D-term ablation

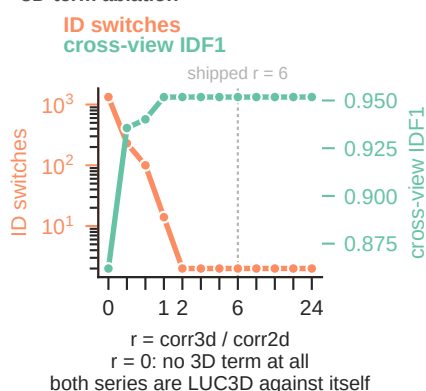

f Time per frame

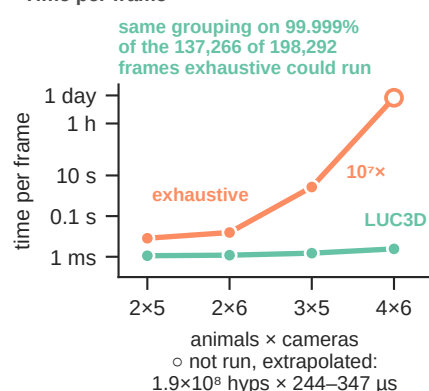

b: the cost function as implemented. c: exact arithmetic. d: measured by scripts/bench/bench_crossview.mjs.

e: 8 BMimica sessions, a fixed 6,000-frame leading window per cell, identical across all 24 cells.

f: exhaustive is our reimplementation of the published per-frame procedure. IDF1 and switches via motmetrics on a shared identity-stripped pool.