


01 / AWS deployment

Application roles are documented; AWS hosting, networking and managed-service choices are proposed.

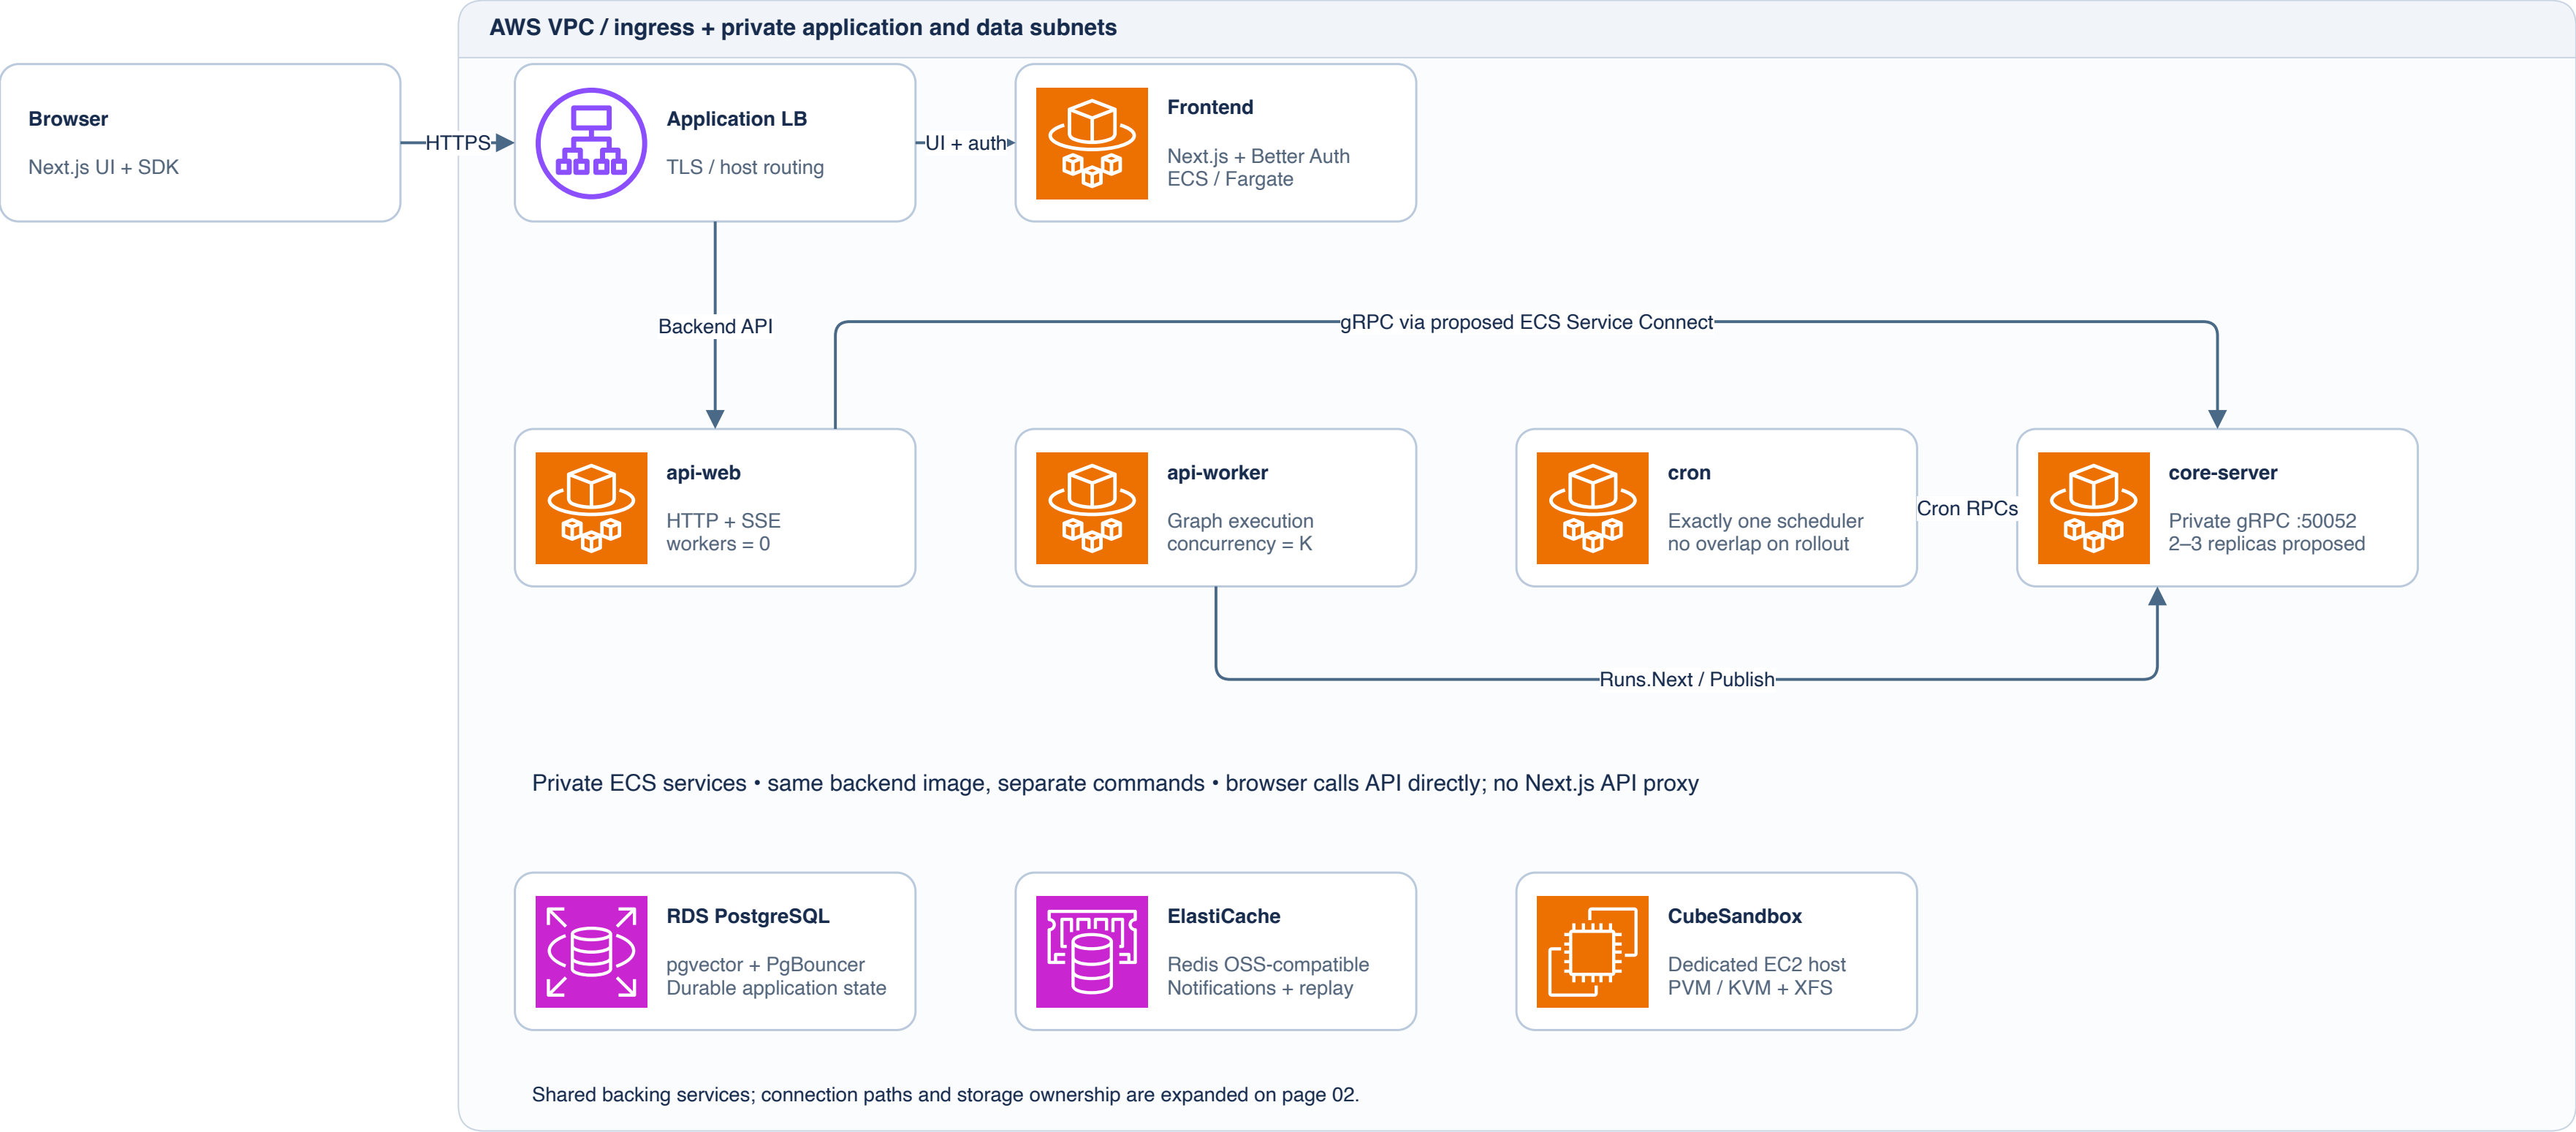

Deployment details to resolve


Fargate stopTimeout ≤ 120 s: shorten the 180s application drain with headroom, or choose ECS on EC2.
Use explicit gRPC service routing; DNS alone does not prove per-RPC load balancing. External LLM / analytics endpoints and egress are omitted.



Amazon S3
Regional bucket
Outside VPC boundary

02 / Data ownership & persistence

Metadata flows through core-server; checkpoints, store and state/history use direct database access.

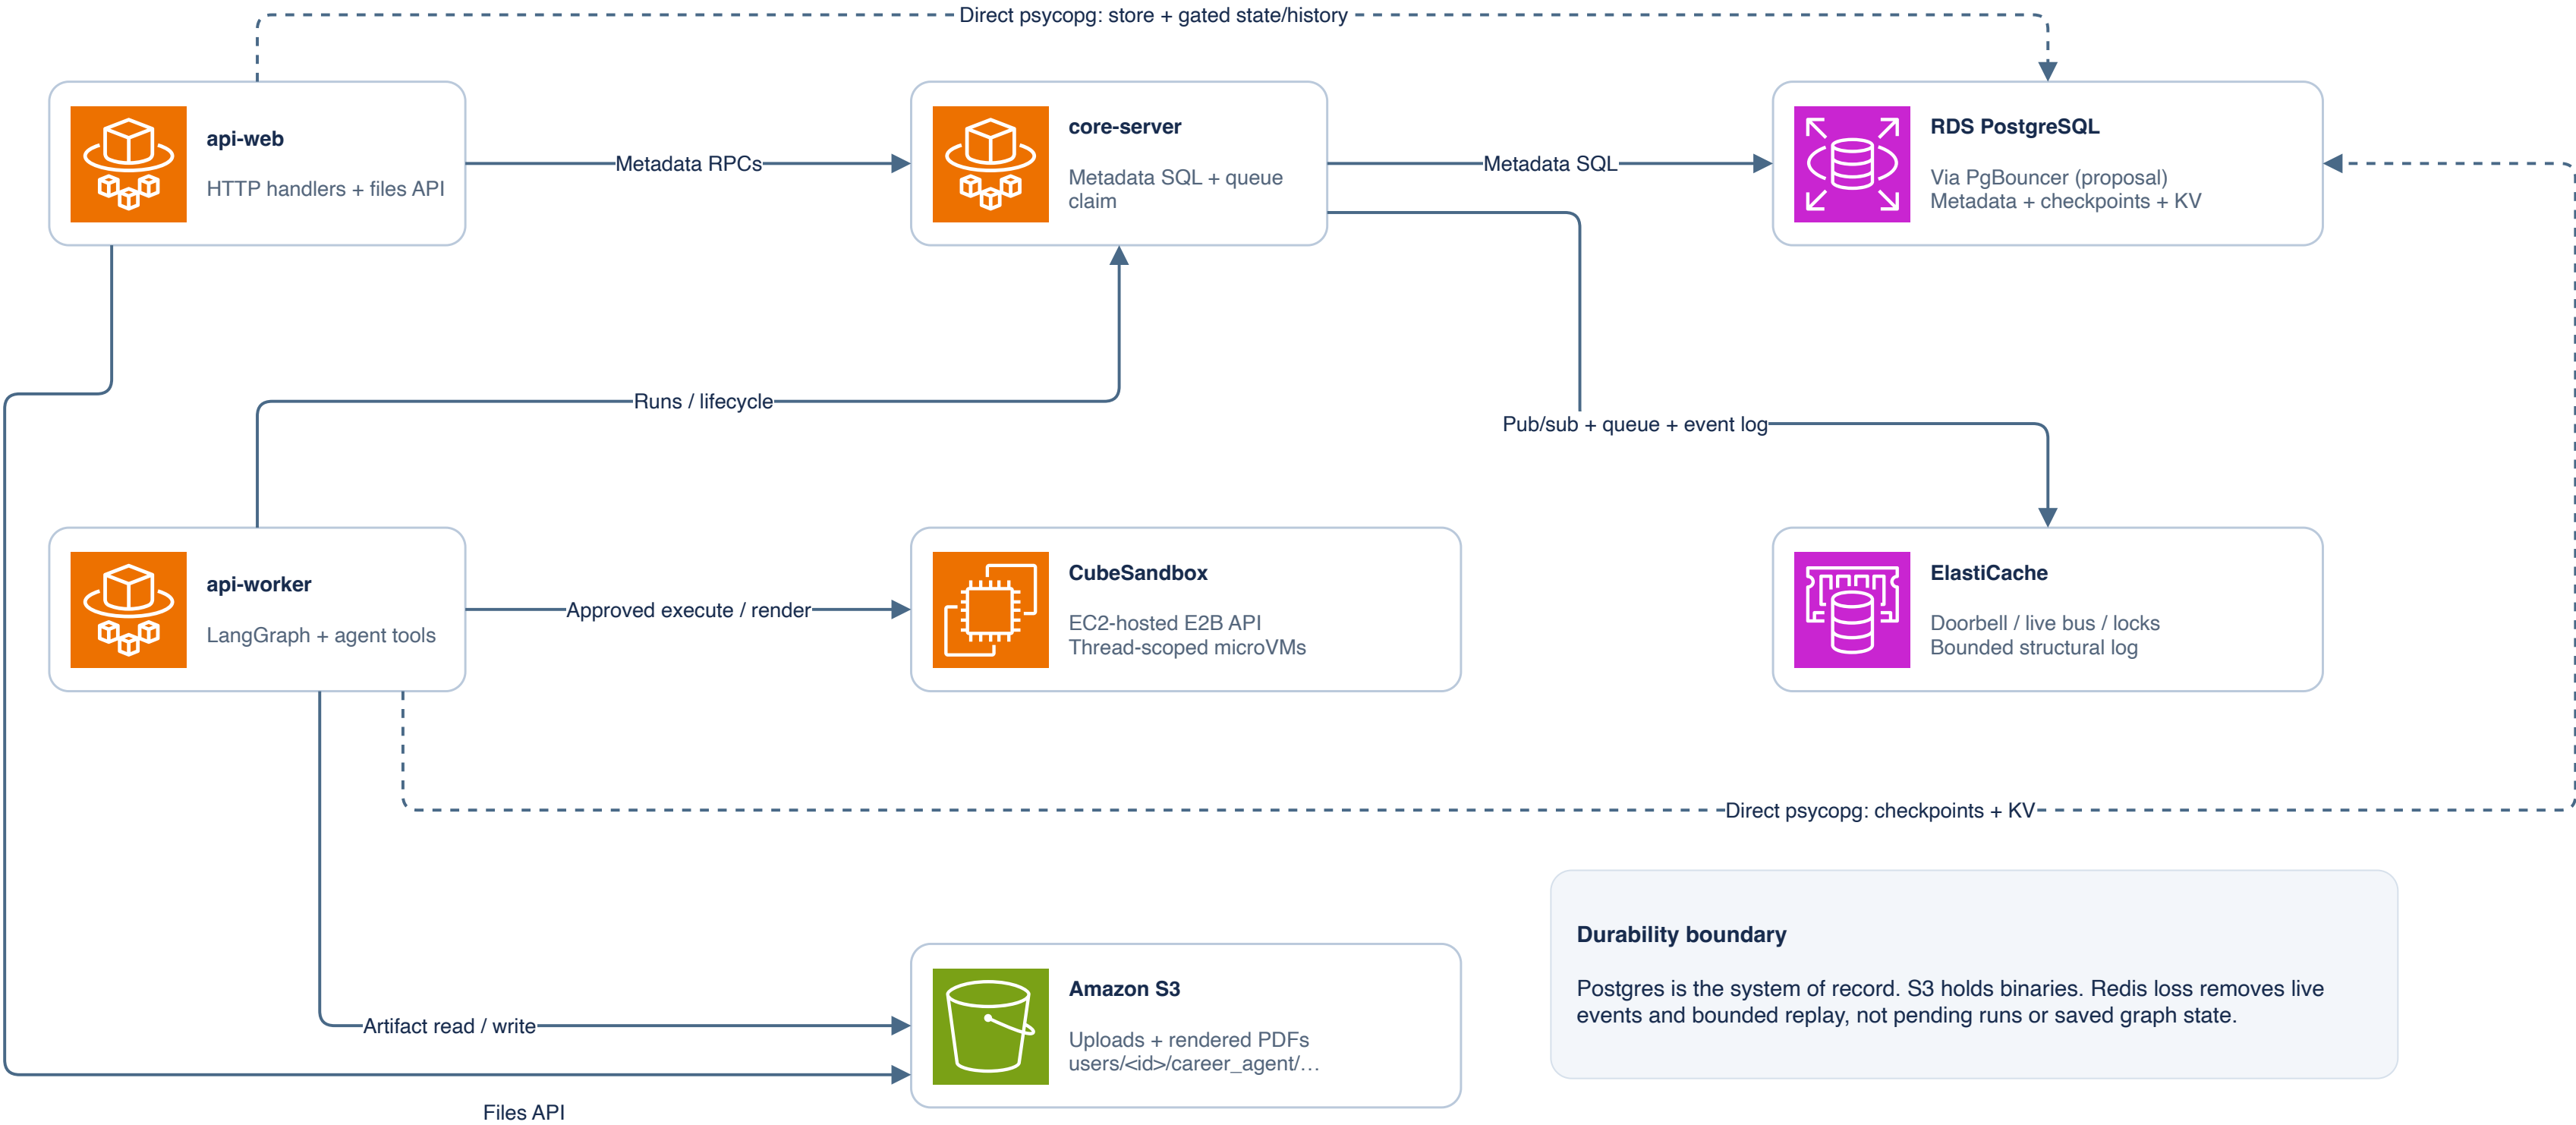


API / workers also use Redis directly for locks and caches (paths omitted).

Solid = service / artifact path · Dashed = database path that bypasses gRPC

03 / Run execution & queue

Queue of record in PostgreSQL; Redis wakes idle claimers. Time flows downward.

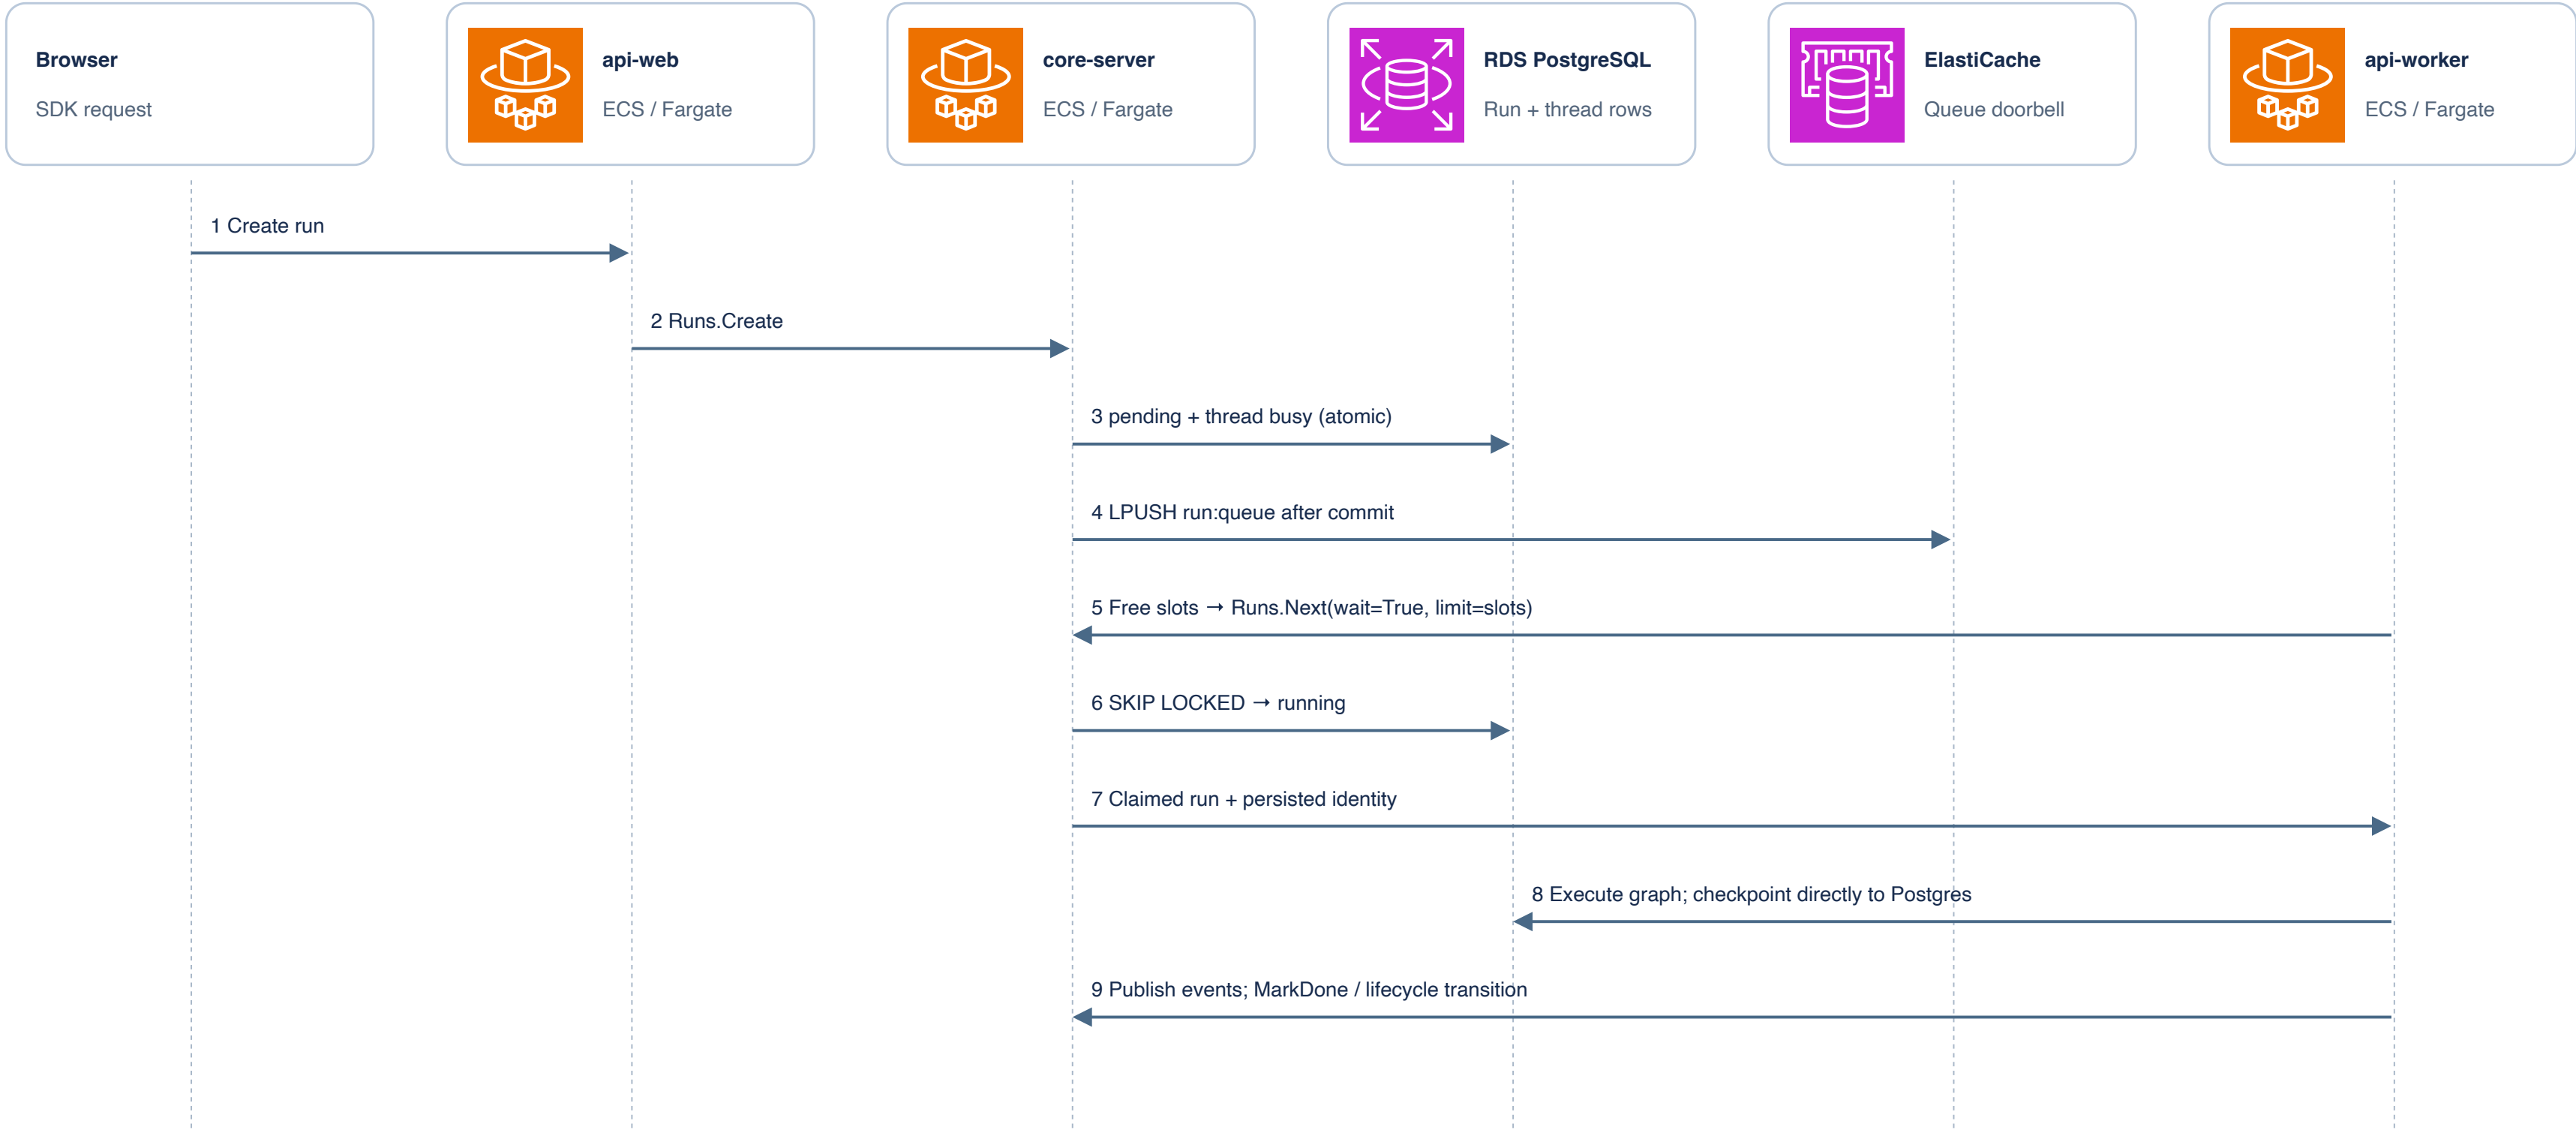

Idle + retry behavior


No pending row → core-server BLPOP waits up to 5s, then retries SQL. Redis is a doorbell, not the queue. Retriable errors re-pend runs; retry counters live in Redis.

Operational limits

Exactly one cron process. No orphan-run sweeper: SIGKILL / OOM can strand a running row. Fargate drain settings must be reconciled with the 180s application default.

04 / Live streaming & bounded replay

SSE carries authenticated browser traffic. Pub/sub carries chunks; Redis Streams retain structural events.

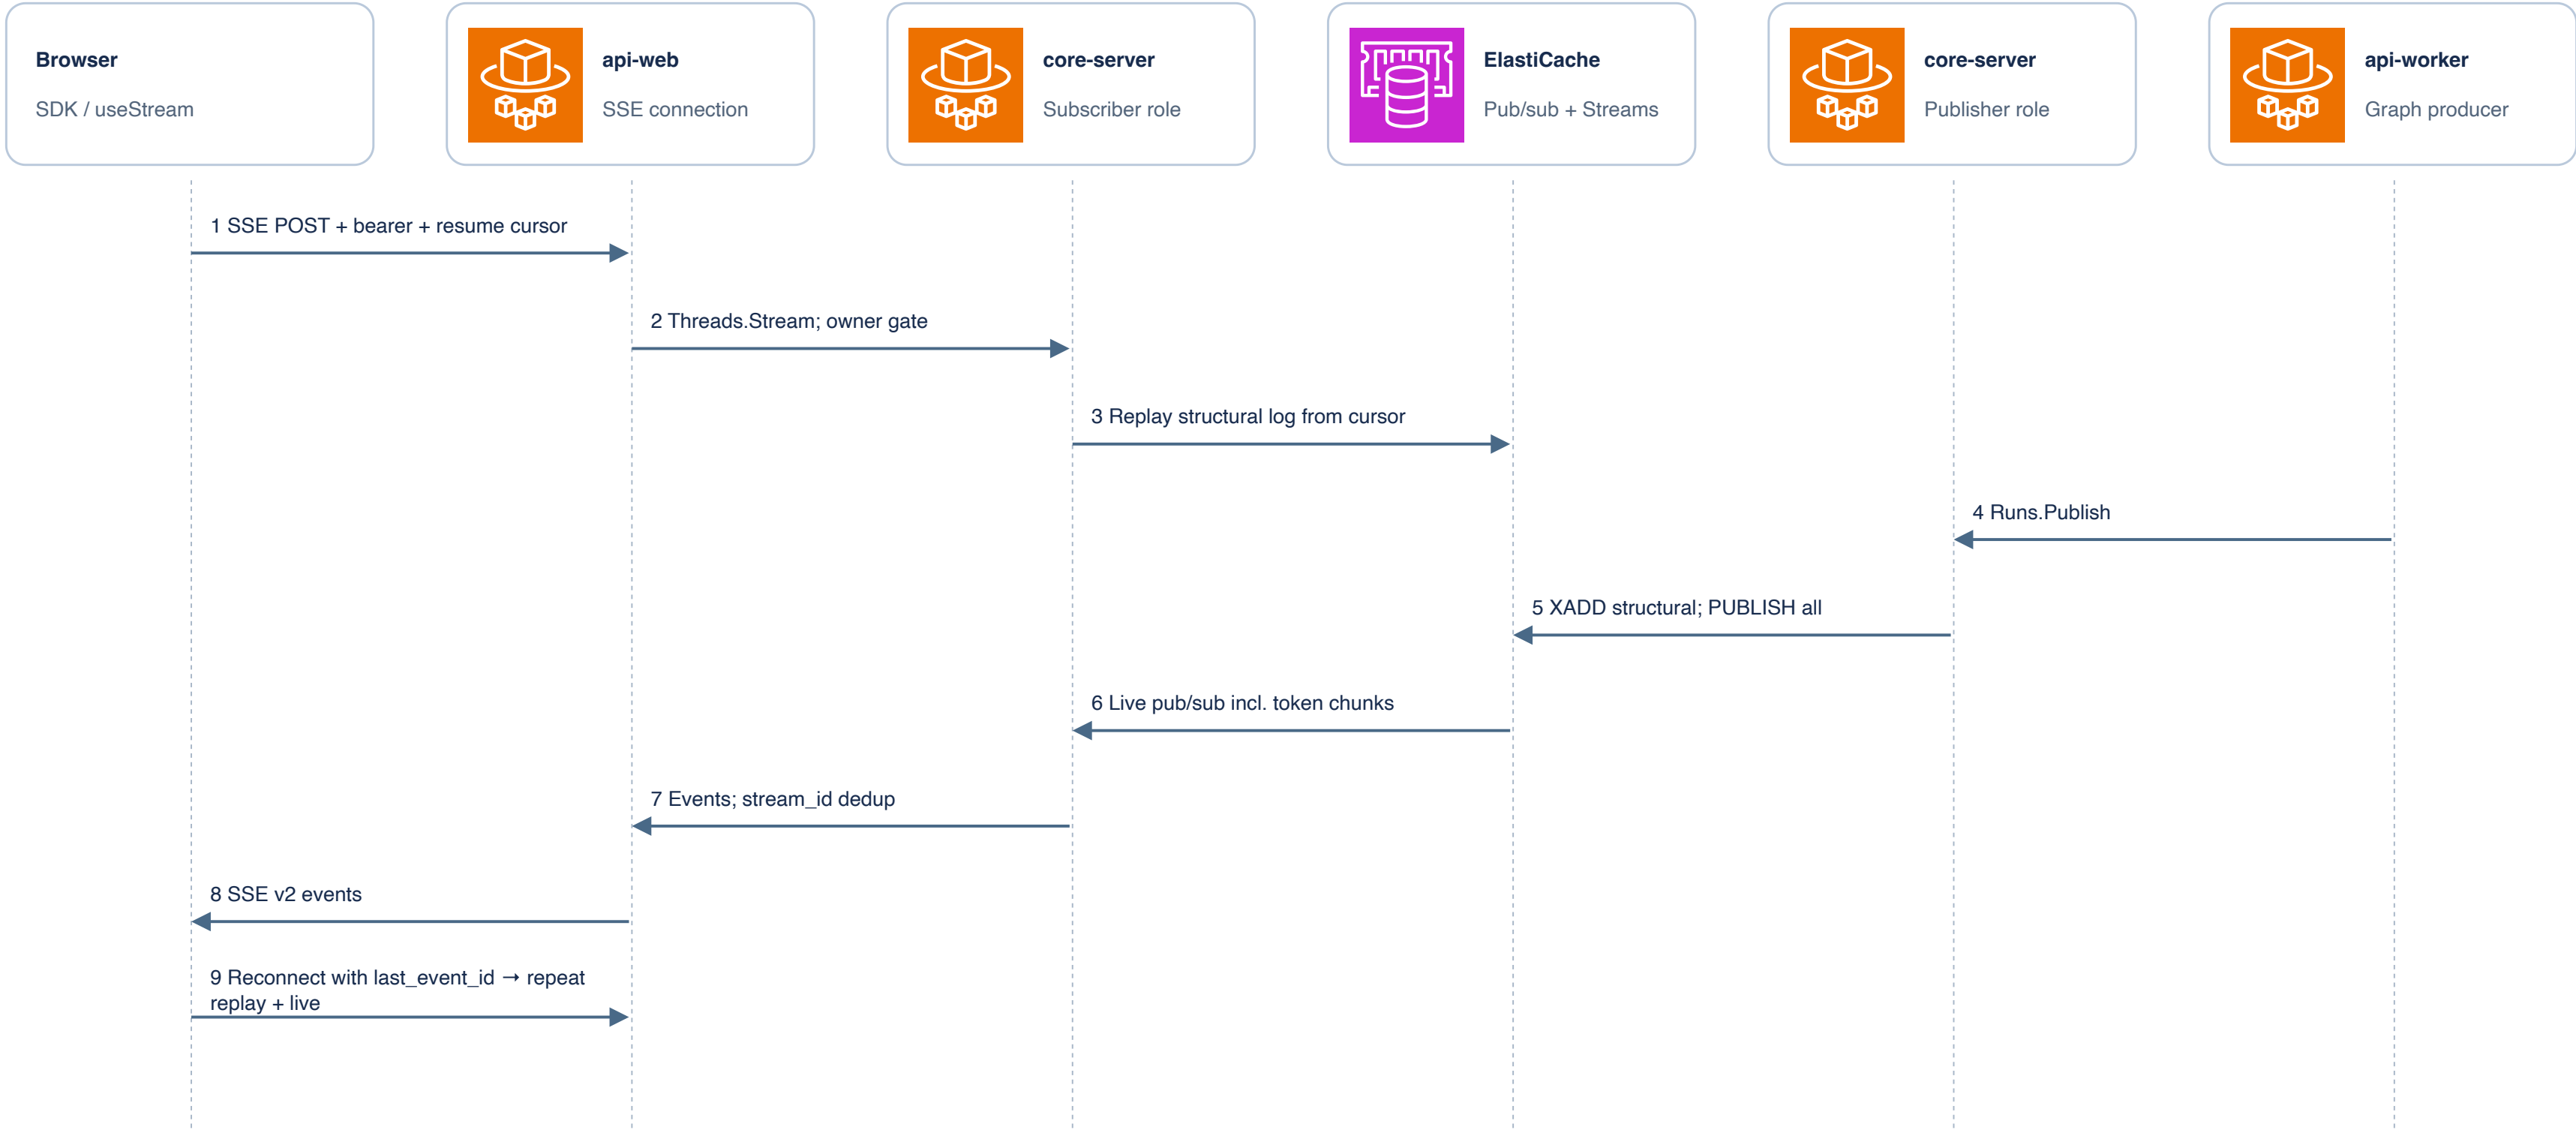

Bounded replay


~8192 structural entries / 7-day TTL. Tools, values, lifecycle and control are logged; token/tool-argument chunks are live-only. Final state rehydrates from Postgres beyond replay bounds.

Roles, not extra services

Publisher and subscriber may be different core-server replicas of the same service. Cancellation uses a :control channel plus a 60s key to cover the subscribe race.

05 / Authentication & per-user storage

Multi-user mode is opt-in. Browser-to-backend traffic is direct; frontend supplies identity via JWT.

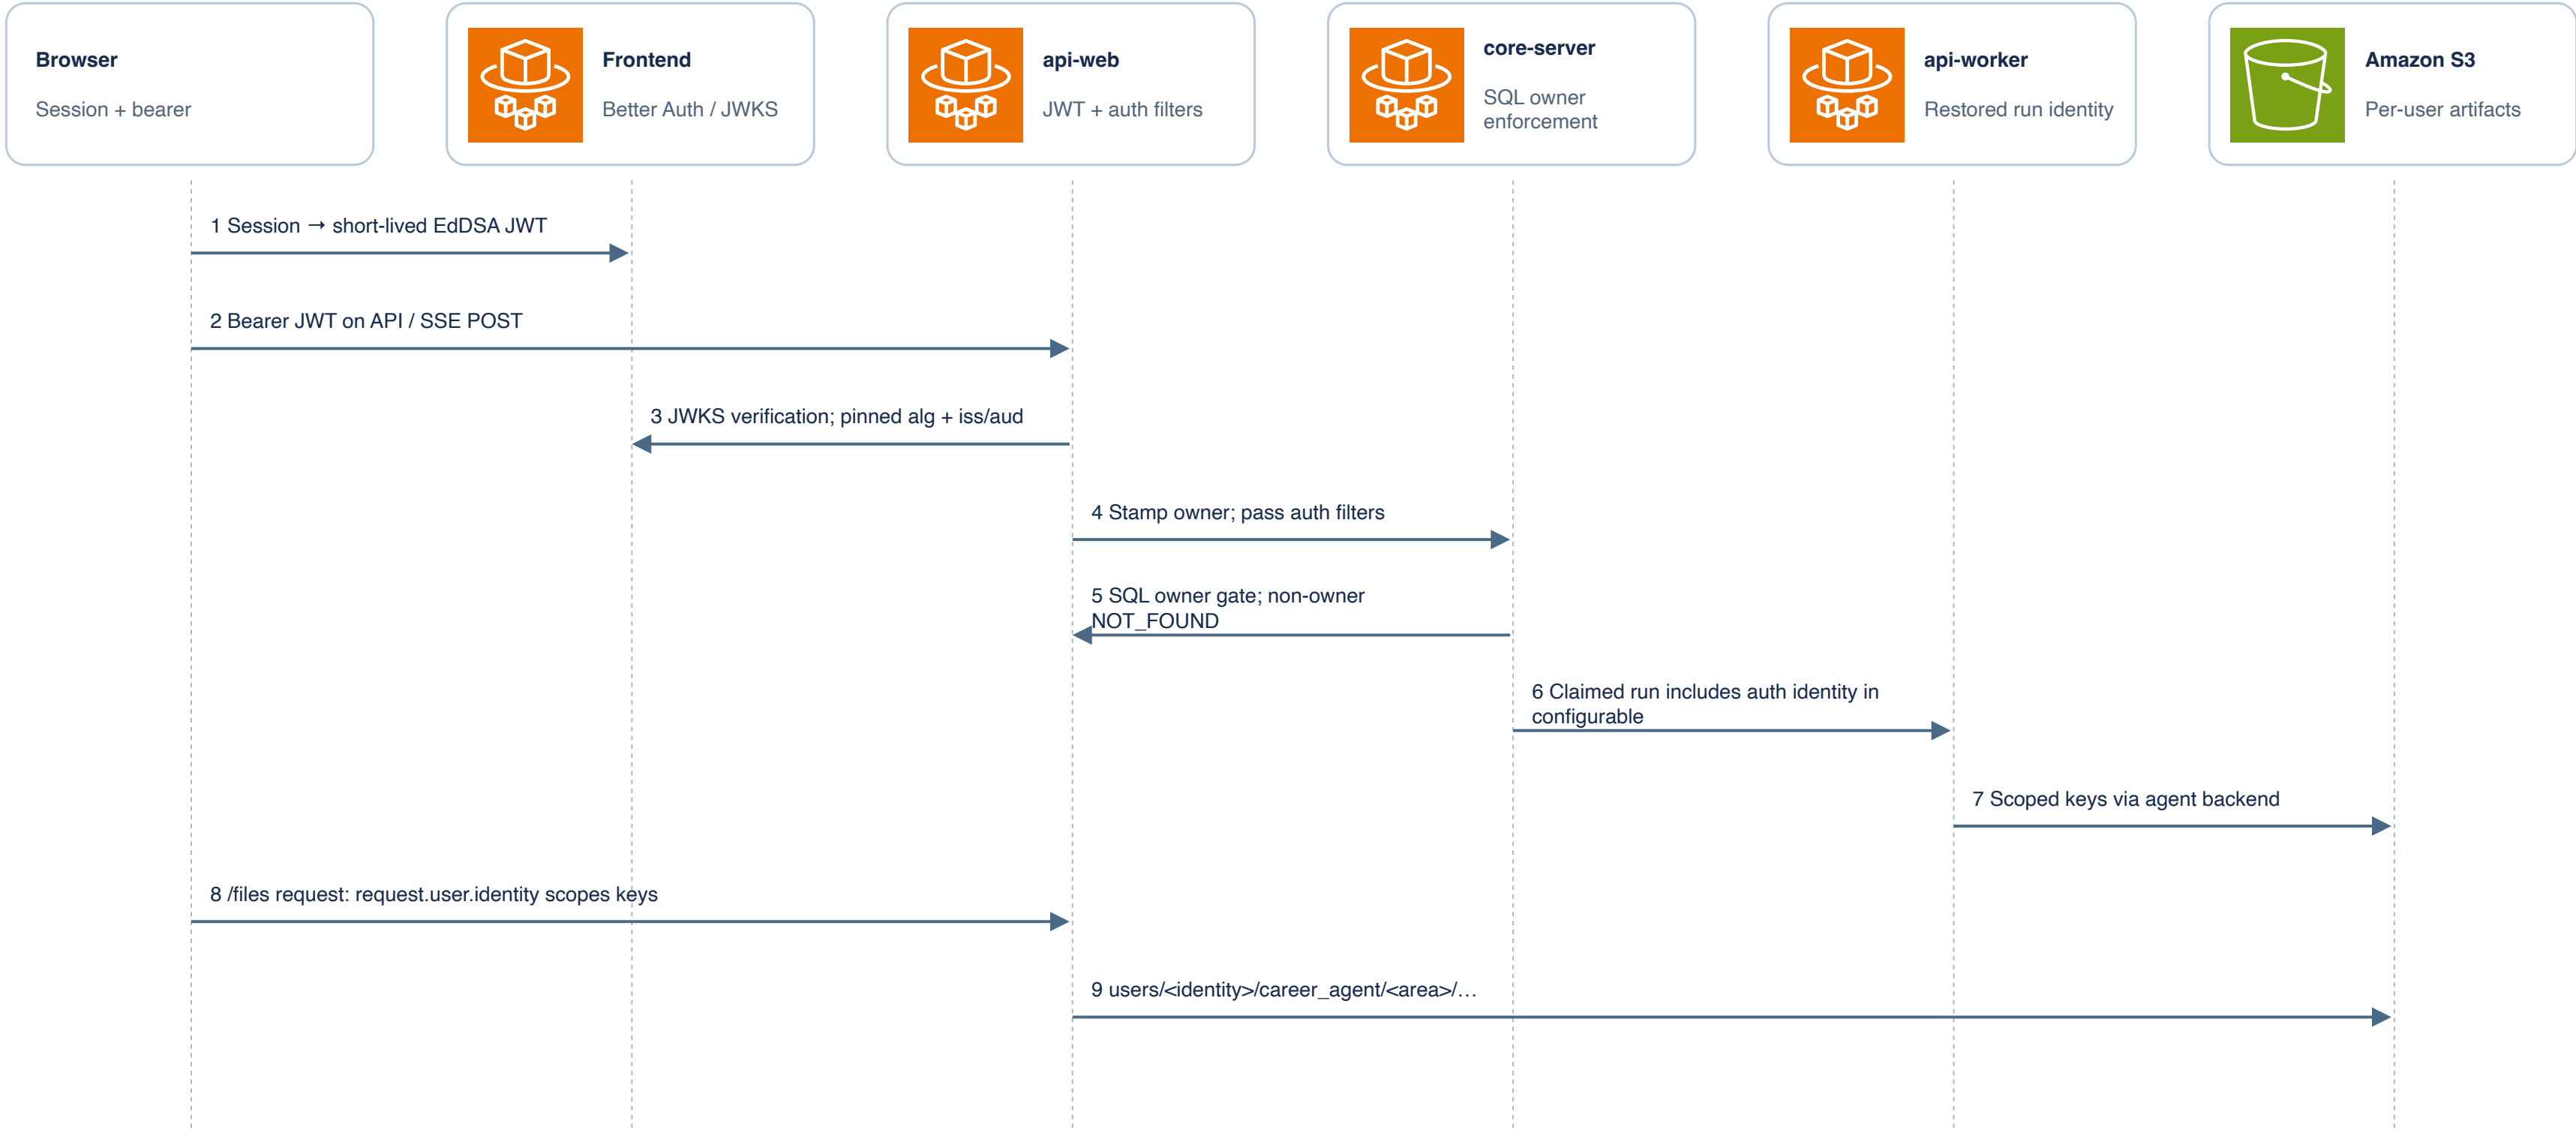

Postgres KV store (direct path)

API namespace rewrite and worker scope both use (<identity>, career_agent, <area>). Checkpoint/state access has a thread ownership gate. Identity is resolved per call, not at singleton construction.

Shared-deployment settings

REQUIRE_AUTH + LANGGRAPH_AUTH on API replicas; enable custom-route auth. Pin CORS. Restrict /metrics and /docs at ingress. Disable MCP / A2A until resource authorization is audited.