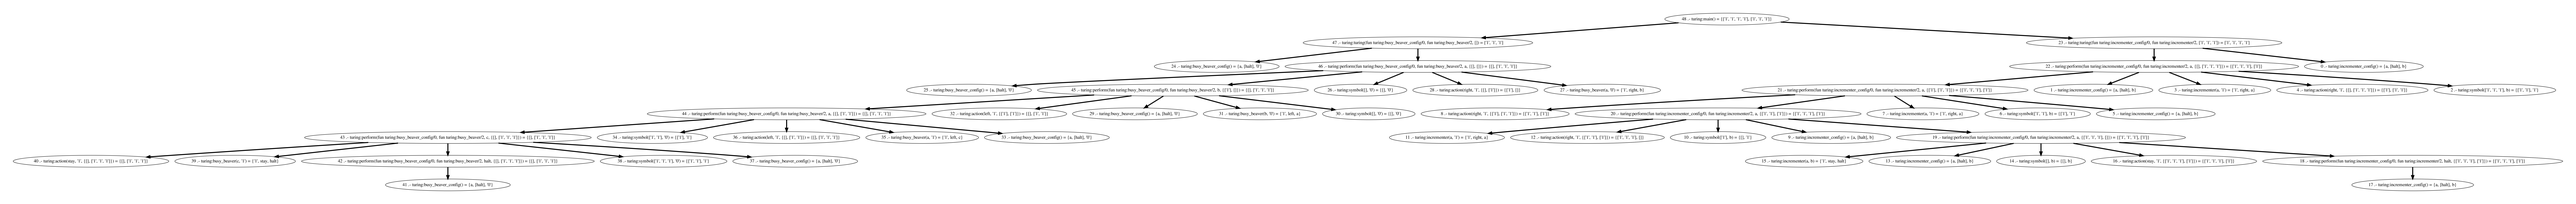
48 -- tating:main() = {{T, T, T, T}, {T, T, T}}
47 -- tating:tating(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, {}) = {T, T, T}
23 -- tating:tating(fun tating:incrementer_config(0, fun tating:incrementer(2, {T, T, T}) = {T, T, T, T}
24 -- tating:busy_beaver_config() = {a, {hold, 0}}
46 -- tating:perform(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, a, {}), {}) = {{}, {T, T, T}}
22 -- tating:perform(fun tating:incrementer_config(0, fun tating:incrementer(2, a, {}), {T, T, T}) = {{T, T, T}, {T}}
1 -- tating:incrementer_config() = {a, {hold, b}}
25 -- tating:busy_beaver_config() = {a, {hold, 0}}
45 -- tating:perform(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, b, {}), {}) = {{}, {T, T, T}}
26 -- tating:symbols(1, 0) = {1, 0}
28 -- tating:action(right, T, {}, {T}}) = {{T}, {}}
27 -- tating:busy_beaver(a, 0) = {T, right, b}
21 -- tating:perform(fun tating:incrementer_config(0, fun tating:incrementer(2, a, {}), {T, T, T}) = {{T, T, T}, {T}}
1 -- tating:incrementer_config() = {a, {hold, b}}
3 -- tating:incrementer(a, T) = {T, right, a}
4 -- tating:action(right, T, {}, {T, T, T}) = {{T}, {T, T}}
5 -- tating:symbols(T, T, T) = {T, T, T}
44 -- tating:perform(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, a, {}), {T, T, T}) = {{}, {T, T, T}}
12 -- tating:action(left, T, {{T}, {T}}) = {{}, {T, T}}
29 -- tating:busy_beaver_config() = {a, {hold, 0}}
31 -- tating:busy_beaver(0, 0) = {T, left, a}
30 -- tating:symbols(1, 0) = {{}, 0}
8 -- tating:action(right, T, {{T}, {T, T}}) = {{T, T}, {T}}
20 -- tating:perform(fun tating:incrementer_config(0, fun tating:incrementer(2, a, {}), {T, T, T}) = {{T, T, T}, {T}}
7 -- tating:incrementer(a, T) = {T, right, a}
6 -- tating:symbols(T, T, b) = {{T}, T}
9 -- tating:incrementer_config() = {a, {hold, b}}
43 -- tating:perform(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, c, {}), {T, T, T}) = {{}, {T, T, T}}
34 -- tating:symbols(T, T, 0) = {T, T}
36 -- tating:action(left, T, {{}, {T, T}}) = {{}, {T, T}}
35 -- tating:busy_beaver(a, Y) = {Y, left, a}
33 -- tating:busy_beaver_config() = {a, {hold, 0}}
11 -- tating:incrementer(a, Y) = {Y, right, a}
12 -- tating:action(right, T, {{T, Y}, {T}}) = {{T, Y, T}, {}}
10 -- tating:symbols(Y, b) = {{}, Y}
0 -- tating:incrementer_config() = {a, {hold, b}}
19 -- tating:perform(fun tating:incrementer_config(0, fun tating:incrementer(2, a, {T, Y, Y}, {}) = {{T, Y, Y}, {T}}
40 -- tating:action(stay, T, {{}, {T, T, Y}}) = {{}, {T, T, Y}}
39 -- tating:busy_beaver(a, Y) = {Y, stay, hold}
42 -- tating:perform(fun tating:busy_beaver_config(0, fun tating:busy_beaver(2, hold, {}), {T, T, Y}) = {{}, {T, Y, Y}}
38 -- tating:symbols(T, T, Y, Y) = {{T, Y, Y}, Y}
37 -- tating:busy_beaver_config() = {a, {hold, W}}
15 -- tating:incrementer(a, b) = {Y, stay, hold}
13 -- tating:incrementer_config() = {a, {hold, b}}
14 -- tating:symbols(1, b) = {{}, b}
16 -- tating:action(stay, Y, {{Y, Y, Y}, {Y}}) = {{Y, Y, Y}, {Y}}
18 -- tating:perform(fun tating:incrementer_config(0, fun tating:incrementer(2, halt, {}), {T, Y, Y}, {Y}}) = {{Y, Y, Y}, {Y}}
41 -- tating:busy_beaver_config() = {a, {hold, W}}
17 -- tating:incrementer_config() = {a, {hold, b}}