

# Secant Method

*MATLAB Implementation*

---

Tamas Kis | [kis@stanford.edu](mailto:kis@stanford.edu)

TAMAS KIS  
<https://github.com/tamaskis>

Copyright © 2021 Tamas Kis

*Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:*

*The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.*

*THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.*



# Contents

<b>1</b>	<b>Download and Installation</b>	<b>4</b>
1.1	Download from MATLAB Central's File Exchange . . . . .	4
1.2	Download from GitHub . . . . .	4
1.3	Files Included With Download . . . . .	4
1.4	Accessing the <code>secant_method</code> Function in a MATLAB Script . . . . .	4
<b>2</b>	<b><code>secant_method</code></b>	<b>5</b>
<b>3</b>	<b>Secant Method</b>	<b>8</b>
	<b>References</b>	<b>12</b>

# 1 Download and Installation

---

## 1.1 Download from MATLAB Central's File Exchange

The `secant_method` function is available for download on MATLAB® Central's File Exchange at [https://www.mathworks.com/matlabcentral/fileexchange/85745-secant-method-secant\\_method](https://www.mathworks.com/matlabcentral/fileexchange/85745-secant-method-secant_method).

## 1.2 Download from GitHub

The `secant_method` function is available for download on GitHub® at [https://github.com/tamaskis/secant\\_method-MATLAB](https://github.com/tamaskis/secant_method-MATLAB).

## 1.3 Files Included With Download

There are **five** files included in the downloaded zip file:

1. `EXAMPLES.M` – *examples for using the `secant_method` function*
2. `LICENSE` – *license for the `secant_method` function*
3. `README.md` – *markdown file for GitHub documentation*
4. `Secant Method - MATLAB Implementation.pdf` – *this PDF*
5. `secant_method.m` – *MATLAB function implementing the secant method*

## 1.4 Accessing the `secant_method` Function in a MATLAB Script

There are **four** options for accessing the `secant_method` function in a MATLAB script:

1. Copy the `secant_method` function to the *end* of your MATLAB script.
2. Place the `secant_method.m` file in the same folder as the MATLAB script.
3. Place the `secant_method.m` file into whatever folder you want, and then use the `addpath(folderName)` command<sup>1</sup> where the `folderName` parameter is a string that stores the filepath of the folder that `secant_method.m` is in *relative to* the folder that your script is in.
4. Make a toolbox by first opening `secant_method.m`, then going to the HOME tab in MATLAB, and finally selecting **Package** **Toolbox** in the drop-down menu under **Add-Ons**. Once you package the `secant_method` function as a toolbox, you can use it in any script.

---

<sup>1</sup> <https://www.mathworks.com/help/matlab/ref/addpath.html>

## 2 secant\_method

Calculates the root of a univariate function using the secant method.

### Syntax

```
root = secant_method(f,x0)
root = secant_method(f,x0,TOL)
root = secant_method(f,x0,[ ],imax)
root = secant_method(f,x0,TOL,imax)
root = secant_method(__,'all')
```

### Description

`root = secant_method(f,x0)` returns the root of a function  $f(x)$  specified by the function handle `f`, where `x0` is an initial guess of the root. The default tolerance and maximum number of iterations are `TOL = 1e-12` and `imax = 1e9`, respectively.

`root = secant_method(f,x0)` returns the root of a function  $f(x)$  specified by the function handle `f`, where `x0` is an initial guess of the root and `TOL` is the tolerance. The default maximum number of iterations is `imax = 1e9`.

`root = secant_method(f,x0,[ ],imax)` returns the root of a function  $f(x)$  specified by the function handle `f`, where `x0` is an initial guess of the root and `imax` is the maximum number of iterations. The default tolerance is `TOL = 1e-12`.

`root = secant_method(f,x0,TOL,imax)` returns the root of a function  $f(x)$  specified by the function handle `f`, where `x0` is an initial guess of the root, `TOL` is the tolerance, and `imax` is the maximum number of iterations.

`root = secant_method(__,'all')` returns a vector, where the first element of this vector is the initial guess, all intermediate elements are the intermediate estimates of the root, and the last element is the converged root. This identifier `'all'` may be appended to any of the syntaxes used above.

### Examples

#### Example 2.1

Find the root(s) of  $f(x) = x^2 - 1$ .

#### ■ SOLUTION

Defining  $f(x)$ ,

```
f = @(x) x^2-1;
```

We know  $f(x) = x^2 - 1$  has roots at  $x = \pm 1$ , but let's pretend we don't know this, and solve this problem using a more general approach. Since  $f(x)$  is a quadratic function, we know that it will have either 0 roots (in the case where  $f(x)$  does not cross the  $x$ -axis) or 2 roots. Let's assume the latter case (otherwise it would be

pointless to try and find roots of  $f(x)$ ). Therefore, we use the secant method twice, with two different guesses. Let's pick  $-10$  and  $10$  as our initial guesses.

```
% finds first root of f(x)=x^2-1 using the secant method
root1 = secant_method(f,-10)

% finds second root of f(x)=x^2-1 using the secant method
root2 = secant_method(f,10)
```

This yields the result

```
root1 =
    -1

root2 =
     1
```

### Example 2.2

Find a root of  $g(x) = h(m(x))$ , where  $h(x) = 5x^2 - 4$  and  $m(x) = \cosh \sqrt{x}$ . Additionally, plot the intermediate root estimates vs. iteration number.

#### ■ SOLUTION

First, let's define  $g(x)$ . Instead of defining it as an anonymous function, we define it as a regular MATLAB function (note that we must either put this function in a separate `.m` file or place it at the end of the script).

```
function g = gx(x)
    m = cosh(sqrt(x));
    h = 5*m^2-4;
    g = h;
end
```

However, we cannot use `gx` directly with `secant_method`. Instead, we first have to assign a function handle to `gx` (this allows us to pass the function to another function as an input parameter).

```
g = @(x) gx(x);
```

Due to the complexity of  $g(x)$ , we have no idea where its root(s) is/are. Let's make the initial guess  $x_0 = 5$ . Solving for the root with the secant method,

```
root = secant_method(g,5)
```


This yields the result

```
root =
    -0.2150
```

To plot the root estimates vs. iteration number,

```
% plots the intermediate root estimates
plot(secant_method(g,5,[],[],'all'),'k*','markersize',9,'linewidth',1.5);
grid on;
xlabel('Iteration','interpreter','latex','fontsize',18);
ylabel('Root Estimate','interpreter','latex','fontsize',18);
```

This yields the following plot:

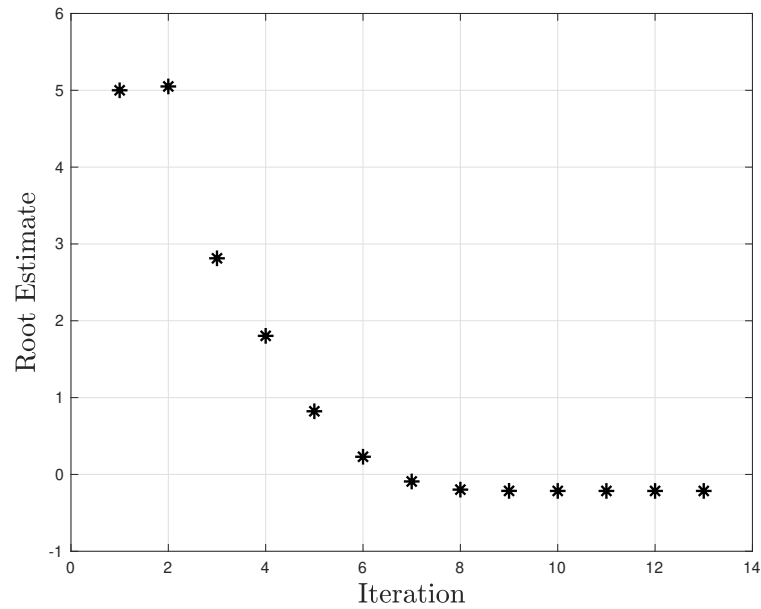

*From this example, we can see that the secant method is much more versatile than Newton's method. The secant method also allows us to find roots of functions that aren't strictly mathematical; that is, we could define a computational function that encapsulates an extremely complicated physical process, and as long as that process has a single input and a single output, we could find its root.*

### 3 Secant Method


**Newton's method** is a root-finding technique that uses the derivative of a function to find its root<sup>2</sup>. Newton's method is defined iteratively as [2, Eq. (1)]

$$x_{i+1} = x_i - \frac{f(x_i)}{f'(x_i)} \quad (1)$$

But what if we don't know  $f'(x)$ ? Then we need to approximate it using some numerical method. Specifically, for the secant method, we use the backward approximation of a derivative, given by Eq. (2) below.

$$f'(x_i) \approx \frac{f(x_i) - f(x_{i-1})}{x_i - x_{i-1}} \quad (2)$$

This approximation can be visualized using the finite difference stencil shown in Fig. 1 below.

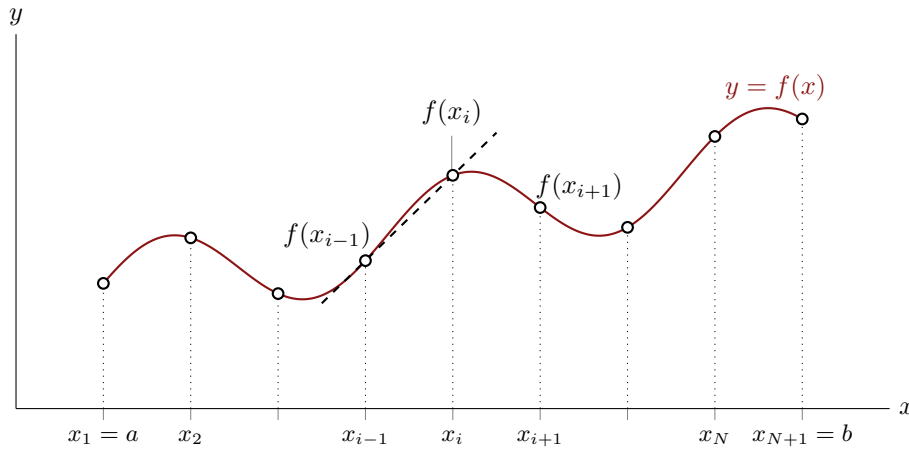

**Figure 1:** Backward approximation.

Substituting Eq. (2) into Eq. (1),

$$\begin{aligned} x_{i+1} &= x_i - \left[ \frac{x_i - x_{i-1}}{f(x_i) - f(x_{i-1})} \right] f(x_i) = \frac{[f(x_i) - f(x_{i-1})] x_i}{f(x_i) - f(x_{i-1})} - \frac{(x_i - x_{i-1}) f(x_i)}{f(x_i) - f(x_{i-1})} \\ &= \frac{x_i f(x_i) - x_i f(x_{i-1})}{f(x_i) - f(x_{i-1})} + \frac{x_{i-1} f(x_i) - x_i f(x_i)}{f(x_i) - f(x_{i-1})} = \frac{x_i f(x_i) - x_i f(x_i) + x_{i-1} f(x_i) - x_i f(x_{i-1})}{f(x_i) - f(x_{i-1})} \\ &\quad \boxed{x_{i+1} = \frac{x_{i-1} f(x_i) - x_i f(x_{i-1})}{f(x_i) - f(x_{i-1})}} \end{aligned} \quad (3)$$

Equation (3) iteratively defines the **secant method**, which can be essentially thought of as a finite difference approximation of Newton's method for finding the root of a univariate function (based on an initial guess<sup>3</sup>). But how do we actually use Eq. (3)? Given an initial guess  $x_0$ , we can keep coming up with new estimates of the root. But how

<sup>2</sup> For a discussion/MATLAB implementation of Newton's method, see [2].

<sup>3</sup> Often, a function  $f(x)$  will have multiple roots. Therefore, the secant method typically finds the root closest to the initial guess  $x_0$ . However, this is not always the case; the algorithm depends heavily on the derivative of  $f(x)$ , which, depending on its form, may cause it to converge on a root further from  $x_0$ .



do we know when to stop? To resolve this issue, we define the **error**<sup>4</sup> as

$$\varepsilon = |x_{i+1} - x_i| \quad (4)$$

Once  $\varepsilon$  is small enough, we say that the estimate of the root has **converged** to the true root, within some **tolerance** (which we denote as TOL). Therefore, if we predetermine that, at most, we can *tolerate* an error of TOL, then we will keep iterating Eq. (3) until  $\varepsilon < \text{TOL}$ . In some cases, the error may never decrease below TOL, or take too long to decrease to below TOL. Therefore, we also define the **maximum number of iterations** ( $i_{\max}$ ) so that the algorithm does not keep iterating forever, or for too long of a time.

In any implementation, we first have to make an initial guess  $x_0$  for the root. Additionally, we need to set the root estimate at the second iteration (i.e.  $x_2$ ) to a value slightly different than  $x_0$  – otherwise, we will just have  $x_{i+1} = x_i$  for all  $i$  and the algorithm will never “get started” (we can think of this as “kick-starting” the algorithm)<sup>5</sup> [1, 3, 4].

There are two basic algorithms for implementing the secant method. The first implementation, shown in Algorithm 1 below, does *not* store the result of each iteration. On the other hand, the second implementation, shown in Algorithm 2, *does* store the result of each iteration. `secant_method` implements both of these algorithms.

Since Algorithm 2 first needs to preallocate a potentially huge array to store all of the intermediate solutions, Algorithm 1 is somewhat faster<sup>6</sup>. However, algorithm 2 is still very important because it allows us to perform convergence studies.

<sup>4</sup> Note that  $\varepsilon$  is an *approximate* error. The motivation behind using this definition of  $\varepsilon$  is that as  $i$  gets large (i.e.  $i \rightarrow \infty$ ),  $x_{i+1} - x_i$  approaches  $x_{i+1} - x^*$  (assuming this sequence is convergent), where  $x^*$  is the true root (and therefore  $x_{i+1} - x^*$  represents the *exact* error).

<sup>5</sup> The alternative way to view this is by recalling that the derivative approximation is given by

$$f'(x_i) \approx \frac{f(x_i) - f(x_{i-1})}{x_i - x_{i-1}}$$

If  $x_i = x_{i-1}$ , then the approximation to  $f'(x_i)$  will become undefined, resulting in an error.

<sup>6</sup> However, the computational savings are not as significant as are with similar implementation of Newton’s method; see [2].

**Algorithm 1:** Secant method.

---

```

1 Given:  $f(x)$ ,  $x_0$ , TOL,  $i_{\max}$ 

    // initializes the error so the loop will be entered
2 err = (2)(TOL)

    // stores 1st and 2nd guesses for root into x vector
3  $x_{\text{old}} = x_0$ 
4  $x_{\text{int}} = 1.01x_0$ 

    // secant method
5  $i = 2$ 
6 while  $\varepsilon > \text{TOL}$  and  $i < i_{\max}$  do
    |
    | // updates estimate of root
    | 7  $x_{\text{new}} = \frac{x_{\text{old}}f(x_{\text{int}}) - x_{\text{int}}f(x_{\text{old}})}{f(x_{\text{int}}) - f(x_{\text{old}})}$ 
    |
    | // calculates error
    | 8  $\varepsilon = |x_{\text{new}} - x_{\text{int}}|$ 
    |
    | // stores updated root estimates for next iteration
    | 9  $x_{\text{old}} = x_{\text{int}}$ 
    |10  $x_{\text{int}} = x_{\text{new}}$ 
    |
    | // increments loop index
    |11  $i = i + 1$ 
12 end

    // returns root
13 root =  $x_{\text{new}}$ 
14 return root

```

---

---

**Algorithm 2:** Secant method with intermediate root estimates.

---

```

1  Given:  $f(x)$ ,  $x_0$ , TOL,  $i_{\max}$ 

    // initializes the error so the loop will be entered
2  err = (2)(TOL)

3  Preallocate an  $i_{\max} \times 1$  vector  $\mathbf{x}$ , where  $\mathbf{x}$  is the vector storing the estimates of the
    root at each iteration.

    // inputs 1st and 2nd guesses for root into  $\mathbf{x}$  vector (note that  $x_1$  and  $x_2$  are the first and
    // second elements of  $\mathbf{x}$ , while  $x_0$  is the input initial guess)
4   $x_1 = x_0$ 
5   $x_2 = 1.01x_0$ 

    // secant method
6   $i = 2$ 
7  while  $\varepsilon > \text{TOL}$  and  $i < i_{\max}$  do
    |   // updates estimate of root
    |    $x_{i+1} = \frac{x_{i-1}f(x_i) - x_i f(x_{i-1})}{f(x_i) - f(x_{i-1})}$ 
    |
    |   // calculates error
    |    $\varepsilon = |x_{i+1} - x_i|$ 
    |
    |   // increments loop index
    |    $i = i + 1$ 
8
9
10
11 end

    // stores intermediate root estimates (where last element of root is the converged root)
12 root =  $(x_1, \dots, x_i)^T$ 

    // returns root
13 return root

```

---

## References

---

- [1] James Hateley. *Nonlinear Equations*. MATH 3620 Course Reader (Vanderbilt University). 2019.
- [2] Tamas Kis. *Newton's Method – MATLAB Implementation*. [https://github.com/tamaskis/newtons\\_method-MATLAB](https://github.com/tamaskis/newtons_method-MATLAB). 2021.
- [3] *Newton's method*. [https://en.wikipedia.org/wiki/Newton%27s\\_method](https://en.wikipedia.org/wiki/Newton%27s_method). (accessed: June 10, 2020).
- [4] *Secant method*. [https://en.wikipedia.org/wiki/Secant\\_method](https://en.wikipedia.org/wiki/Secant_method). (accessed: January 15, 2020).