

Ex.No: 7	Implement Keyboard Event Monitoring
-----------------	--

AIM:

ALGORITHM:

CODE:

```
import tkinter as tk

from datetime import datetime

monitoring = False

def start_monitoring(): global
    monitoring monitoring =
    True
    status_label.config(text="Status: Monitoring") input_box.focus_set()

def stop_monitoring(): global
    monitoring monitoring =
    False
```


```

status_label.config(text="Status: Stopped") def
monitor_key(event):
    if monitoring:
        key = event.keysym
        time = datetime.now().strftime("%H:%M:%S")
        output_box.config(state="normal") output_box.insert(tk.END,
            f"{time} Key Pressed: {key}\n")
        output_box.config(state="disabled")
root = tk.Tk()
root.title("Keyboard Event Monitoring")
root.geometry("600x450")
title = tk.Label( root,
    text="Keyboard Event Monitoring",
    font=("Arial", 18, "bold")
)
title.pack(pady=15)
tk.Label(root, text="Type something here:").pack() input_box
= tk.Text(root, height=5, width=60) input_box.pack(pady=10)
input_box.bind("<KeyPress>", monitor_key) start_button =
tk.Button(
    root,
    text="Start Monitoring",
    command=start_monitoring
)
start_button.pack(pady=5) stop_button =
tk.Button(
    root,
    text="Stop Monitoring",
    command=stop_monitoring

```

```
stop_button.pack(pady=5)
status_label = tk.Label(root, text="Status: Stopped")
status_label.pack(pady=10)
tk.Label(root, text="Keyboard Events").pack() output_box =
tk.Text(
    root, height=10,
    width=65,
    state="disabled"
)
output_box.pack(pady=10)
root.mainloop()
```

OUTPUT:

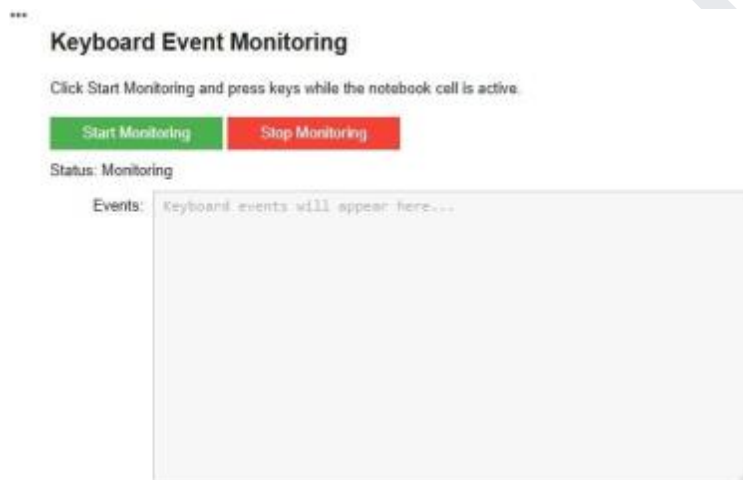

RESULT: