

GIT COMMANDS


Git init: it is used to create an empty git repository. It is also used to reinitialize the existing one

Git clone “url”: git clone is a git command, which is used to create a copy of an existing repository into a new directory.

Git add “filename”: It is used to add new or changed files into the directory.

Git status: it is used to know the current status of the repository.

Git branch: it allows us to create, list, rename and delete branches.

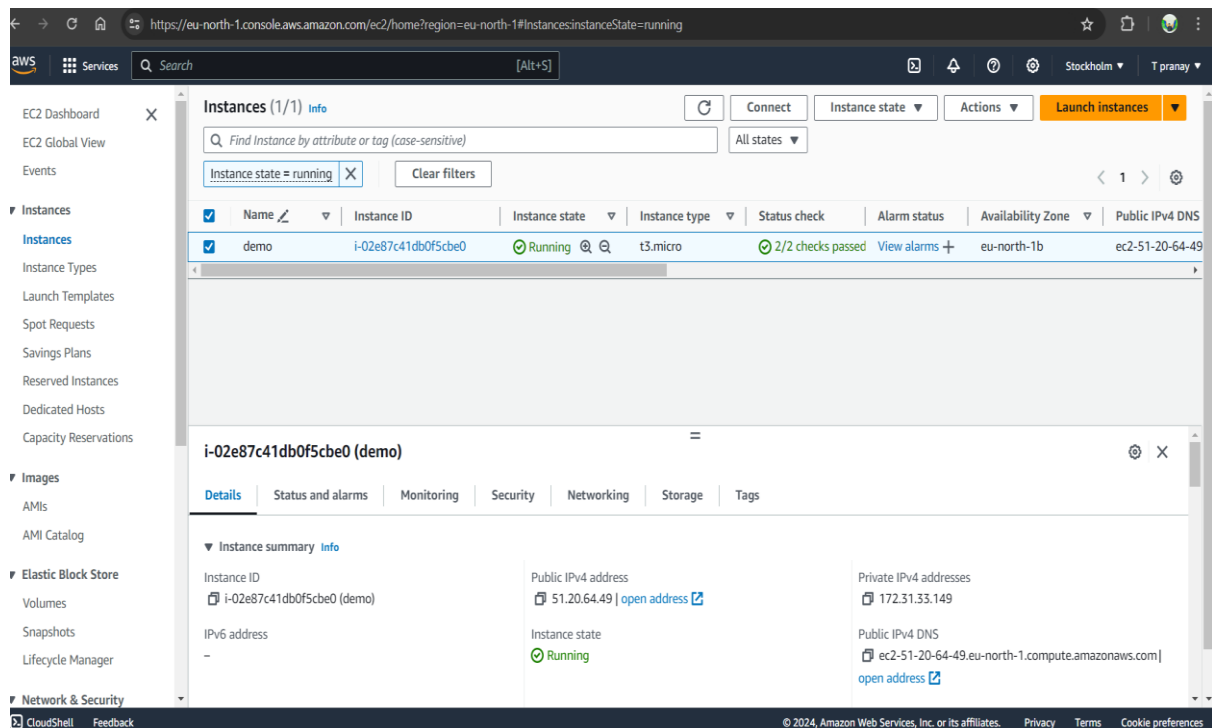

GIT COMMANDS

Git commit-m "msg": It is a shortcut command that immediately creates a commit with a passed commit message.

Git push: It is used to upload local repository content to the remote repository.

Git pull: it is used to fetch and download the content from the current repository and immediately update the local repository to match the content.