



# HFIMSServerV1 Installation manual


## 1.choose language

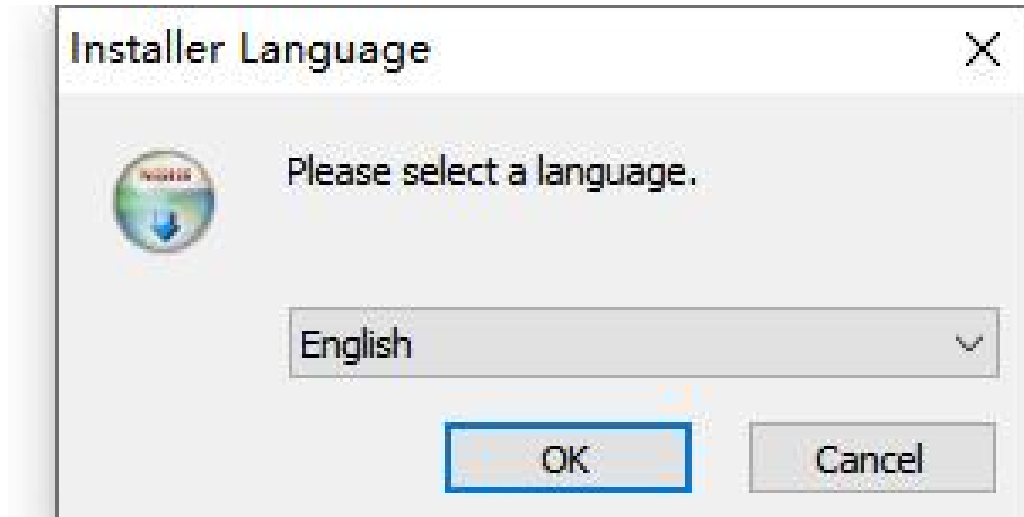


## 2.click “next”

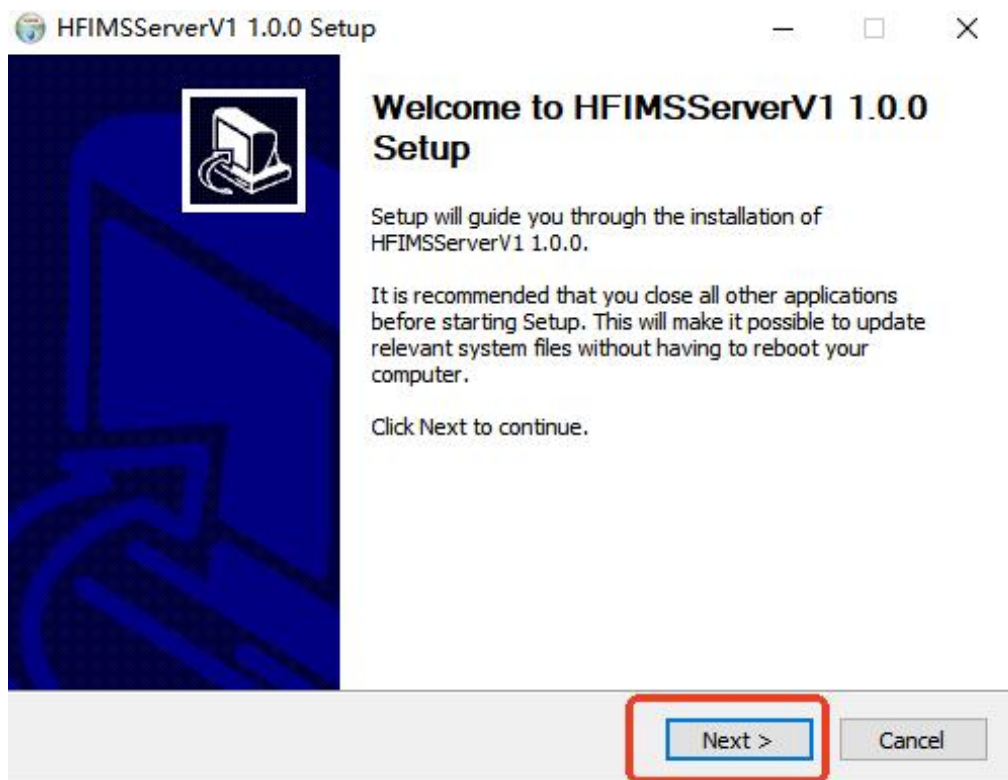


### 3. Click "I agree"

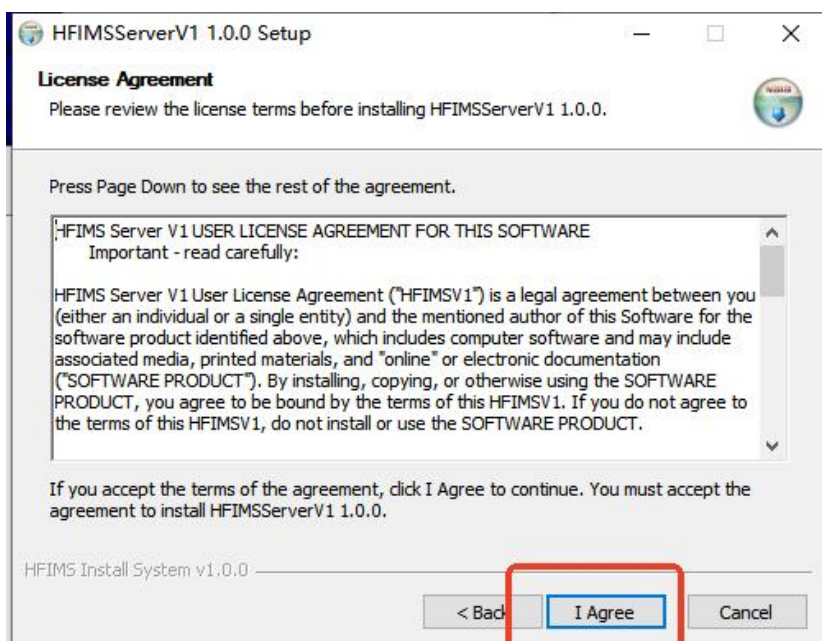


### 4. Select the installation path and click Next

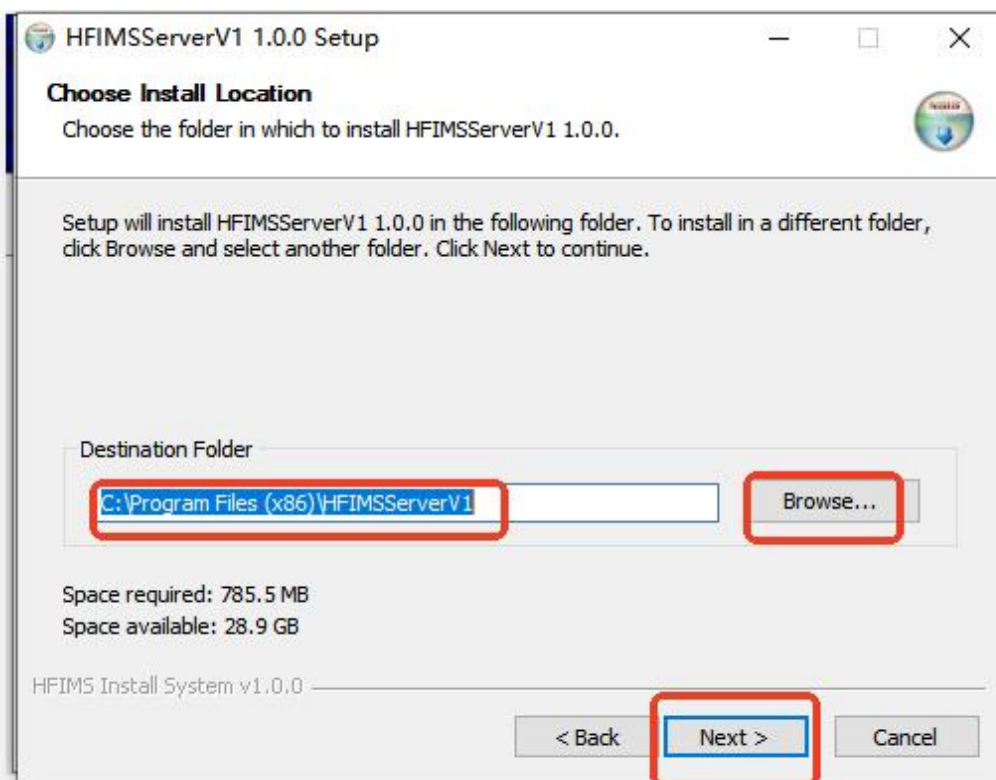


### 5. default name and install

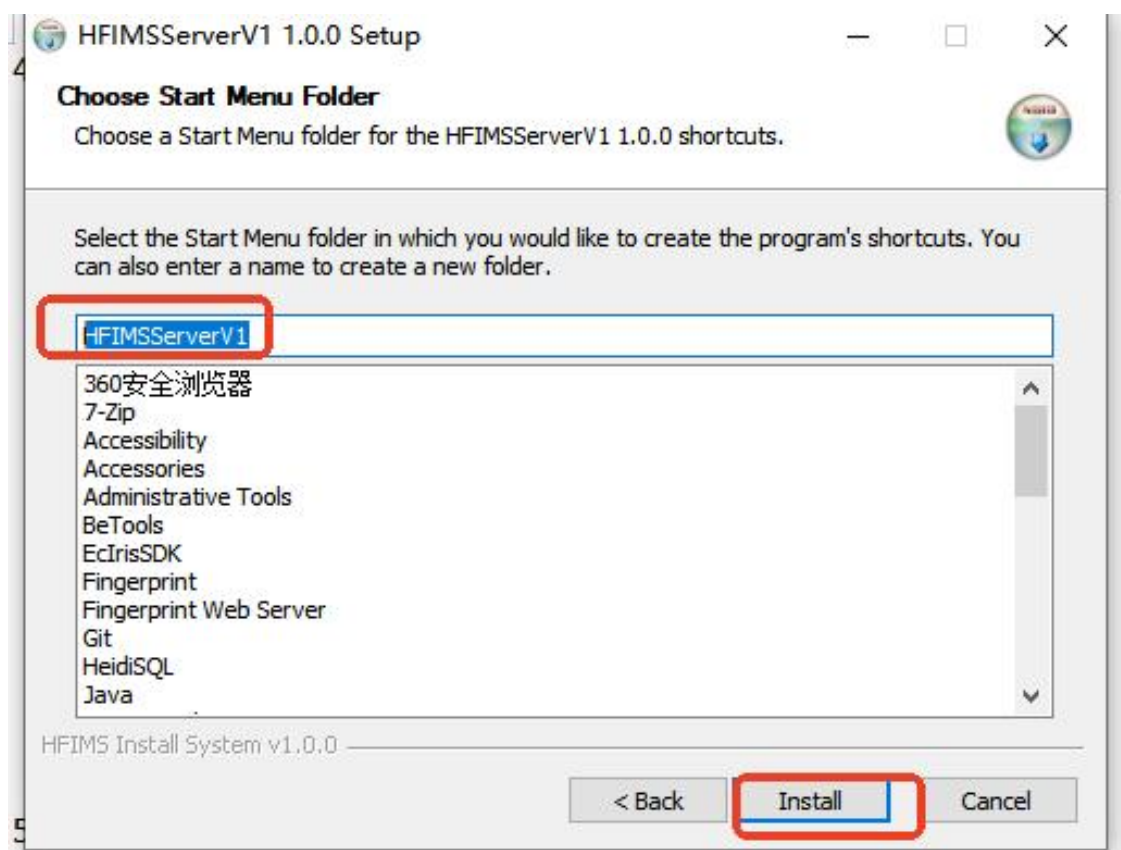



**6.This command windows is displayed after the installation is successful**


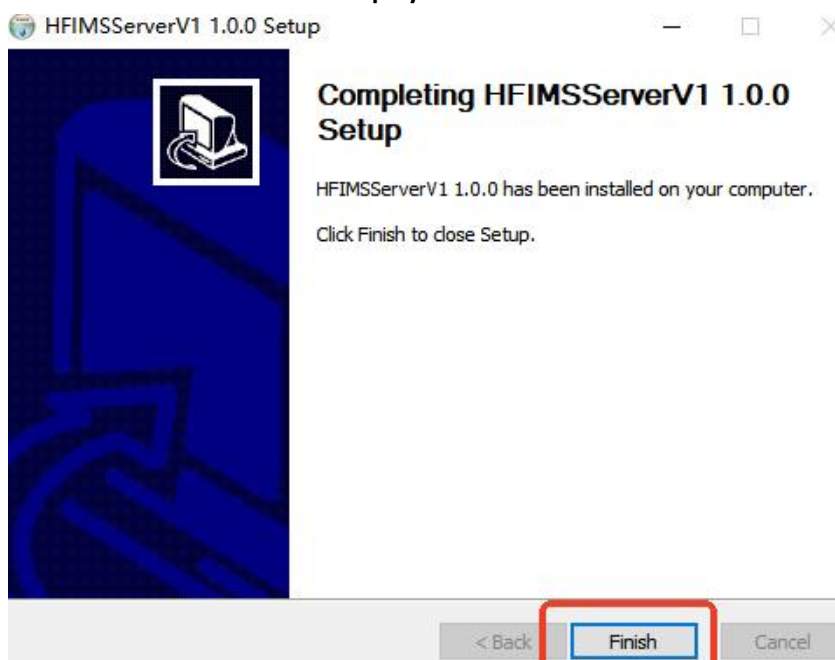


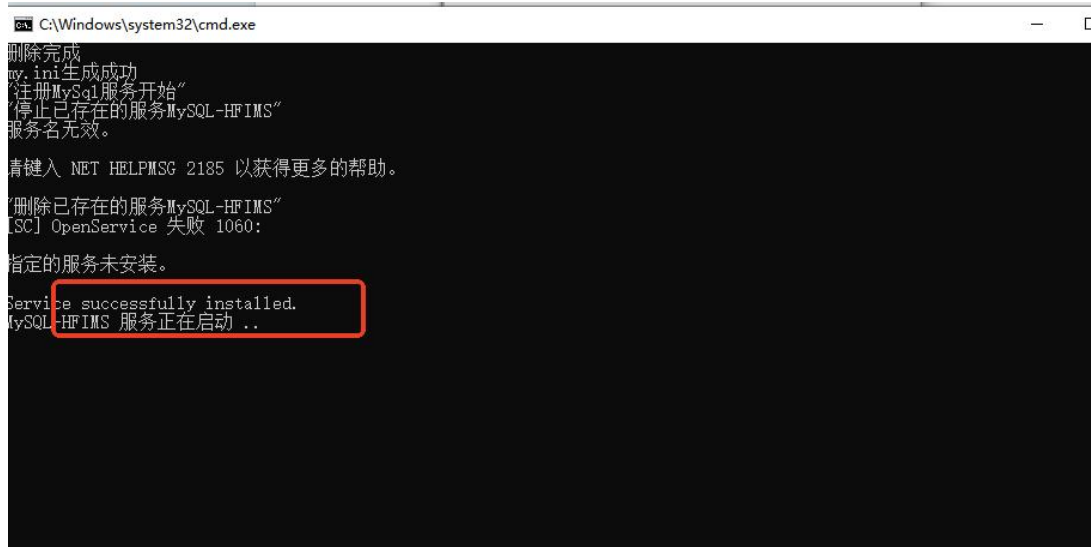

## 7. Find the installation path, locate the database exe file, and start the installation

### Choose "English"

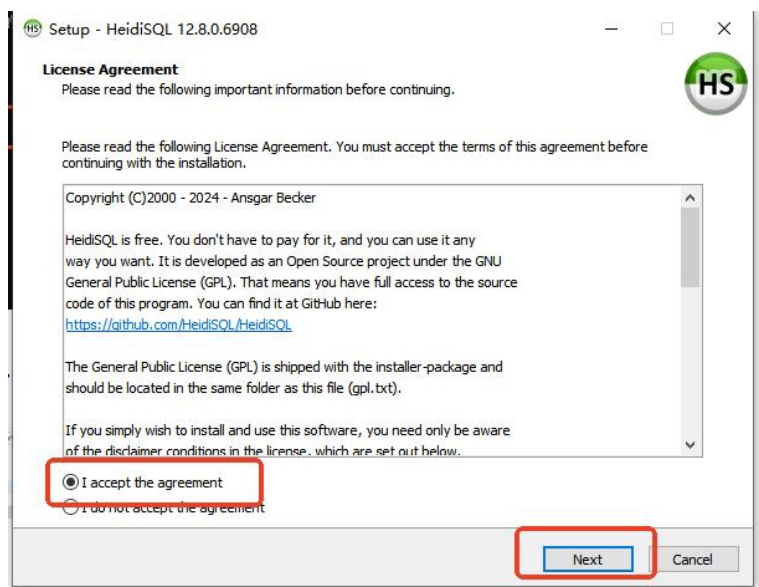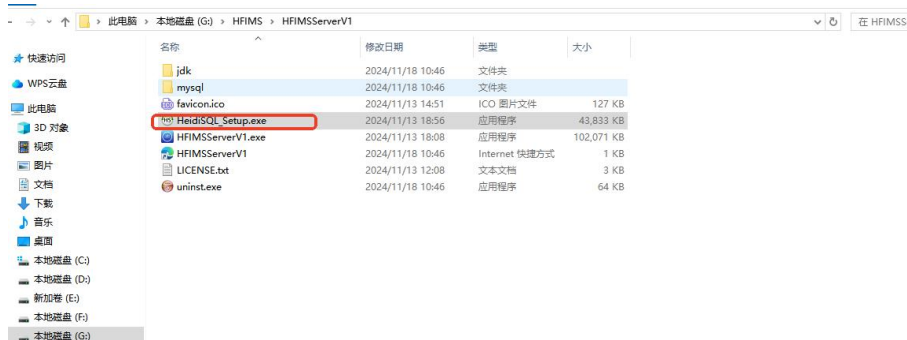

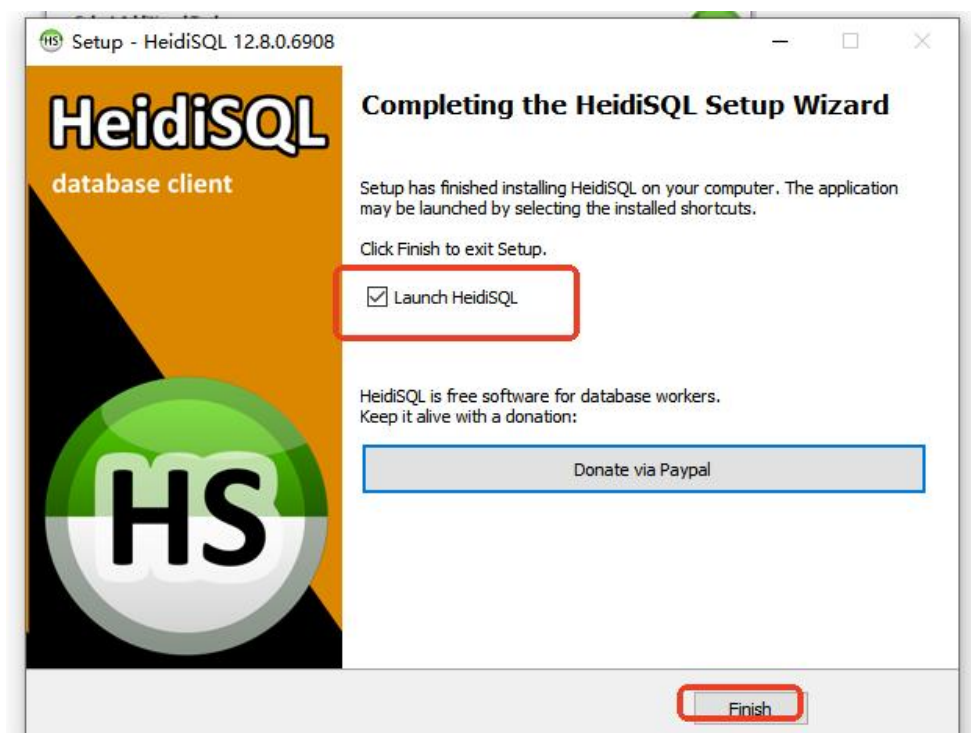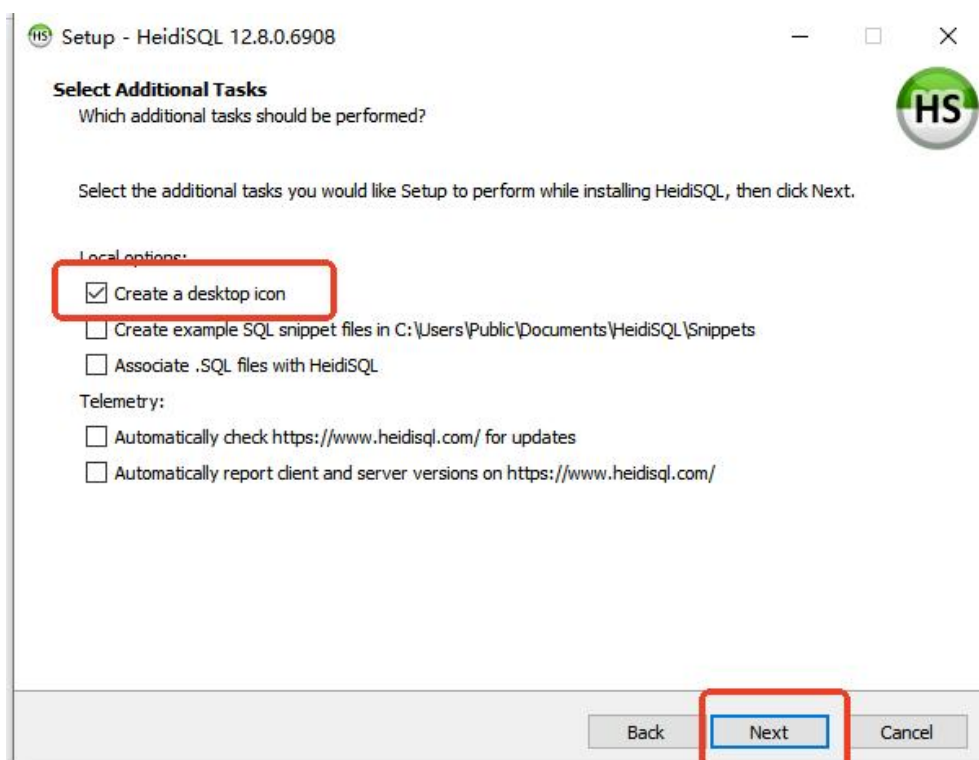

## 8.Run HeidiSQL.exe



Enter server ip or localhost or 127.0.0.1

Admin: root

Password: 123456 (The default value can be customized)

Click "Open"



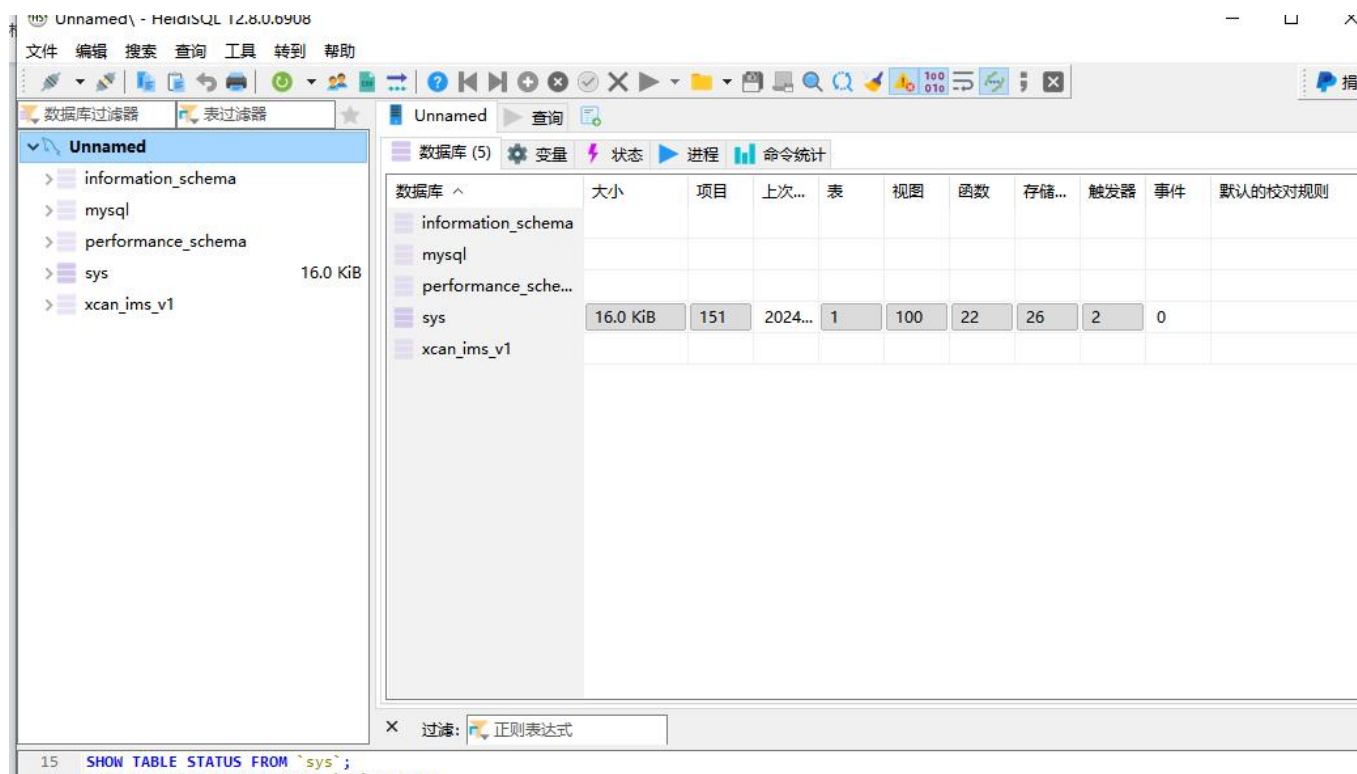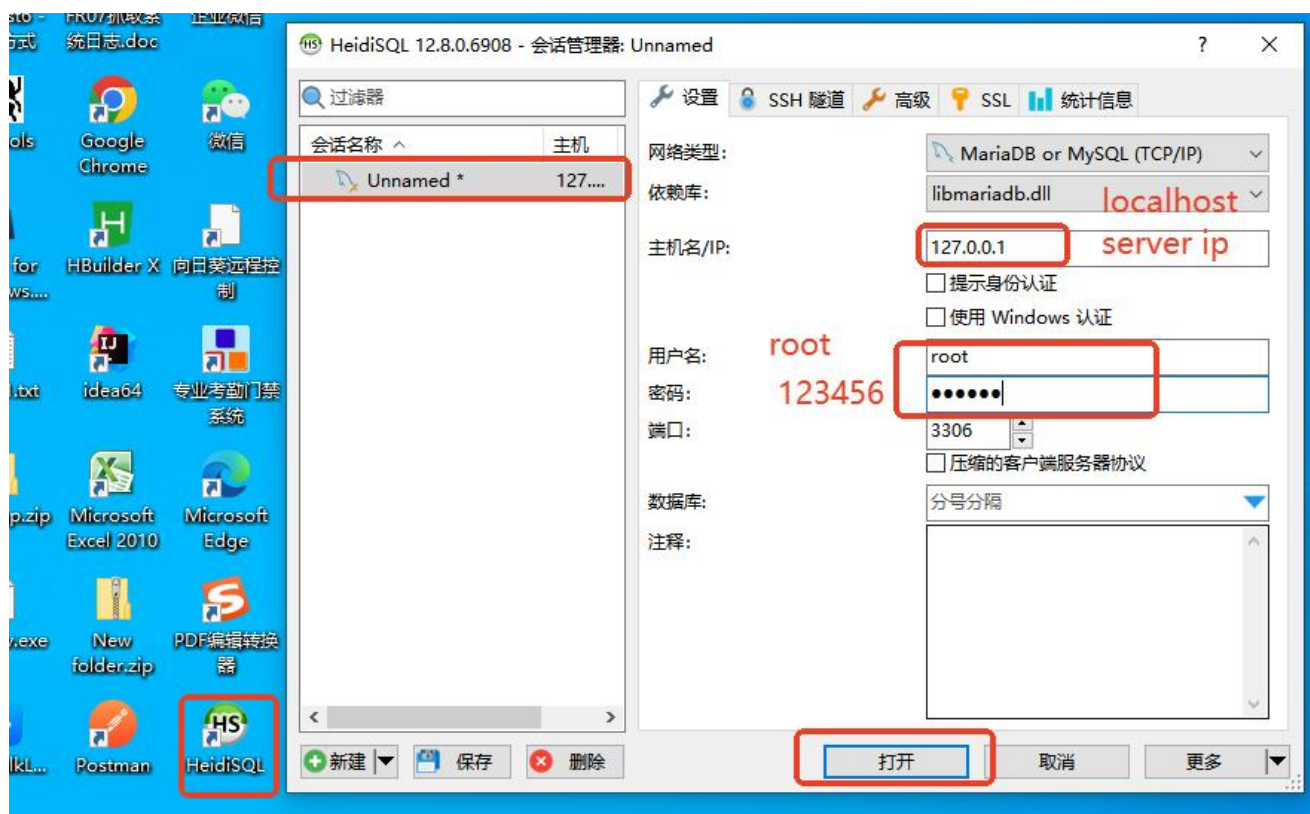

9.database connect successfully,  
 Start HFIMSServerV1

此电脑 > 本地磁盘 (G:) > HFIMS > HFIMSServerV1

| 名称                       | 修改日期             | 类型            | 大小         |
|--------------------------|------------------|---------------|------------|
| jdk                      | 2024/11/18 10:46 | 文件夹           |            |
| logs                     | 2024/11/18 11:27 | 文件夹           |            |
| mysql                    | 2024/11/18 10:46 | 文件夹           |            |
| favicon.ico              | 2024/11/13 14:51 | ICO 图片文件      | 127 KB     |
| HeidiSQL_Setup.exe       | 2024/11/13 18:56 | 应用程序          | 43,833 KB  |
| <b>HFIMSServerV1.exe</b> | 2024/11/13 18:08 | 应用程序          | 102,071 KB |
| HFIMSServerV1            | 2024/11/18 10:46 | Internet 快捷方式 | 1 KB       |
| LICENSE.txt              | 2024/11/13 12:08 | 文本文档          | 3 KB       |
| uninst.exe               | 2024/11/18 10:46 | 应用程序          | 64 KB      |

10"Tomcat started on port(s): 8980 (http) with context path '/ims'" is displayed.


```

G:\HFIMS\HFIMSServerV1\HFIMSServerV1.exe
description AS 'description', a.main_class_name AS 'mainClassName', a.current_version AS 'currentVersion', a.upgrade_info AS 'upgradeInfo' FROM 'js_sys_modul
WHERE a.status = 1[sqlMap.wheresStatus#01] ORDER BY a.update_date DESC
11-18 11:40:48.902 DEBUG [com.s.t.SpringManagedTransaction ] - JDBC Connection [com.alibaba.druid.proxy.jdbc.ConnectionProxyImpl@321bdc] will not be managed
by Spring
11-18 11:40:48.902 DEBUG [c.j.modules.sys.dao.ModuleDao.findList ] - => Preparing: SELECT a.`status` AS `status`, a.`create_by` AS `createBy`, a.`create_date` AS `
createDate`, a.`update_by` AS `updateBy`, a.`update_date` AS `updateDate`, a.`remarks` AS `remarks`, a.`module_code` AS `moduleCode`, a.`module_name` AS `moduleNam
e`, a.`description` AS `description`, a.`main_class_name` AS `mainClassName`, a.`current_version` AS `currentVersion`, a.`upgrade_info` AS `upgradeInfo' FROM 'js_sys
module' a WHERE a.`status` = ? ORDER BY a.`update_date` DESC
11-18 11:40:48.903 DEBUG [c.j.modules.sys.dao.ModuleDao.findList ] - ==> Parameters: 0(String)
11-18 11:40:48.955 DEBUG [c.j.modules.sys.dao.ModuleDao.findList ] - ==> Total: 11
11-18 11:40:48.969 INFO [o.s.b.w.embedded.tomcat.TomcatWebServer ] - Tomcat started on port(s): 8980 (http) with context path '/ims'
11-18 11:40:48.982 WARN [c.h.x.gateway.netty.HfGatewayBootstrap ] - 线程阻塞 @ 线程名称: ...
11-18 11:40:48.984 WARN [c.h.x.gateway.netty.HfGatewayBootstrap ] - 线程阻塞 @ 线程名称: ... 线程ID: 70010 takes 2 ms.
11-18 11:40:48.985 WARN [c.h.x.gateway.netty.HfGatewayBootstrap ] - 线程阻塞 @ 线程名称: ... 线程ID: 70011 takes 3 ms.
11-18 11:40:48.986 WARN [c.h.x.gateway.netty.HfGatewayBootstrap ] - 线程阻塞 @ 线程名称: ...
11-18 11:40:54.480 DEBUG [c.j.e.m.m.provider.SelectSqlProvider ] - OR: SELECT a.`id` AS `id`, a.`config_name` AS `configName`, a.`config_key` AS `configKey`,
a.`config_value` AS `configValue`, a.`is_sys` AS `isSys`, a.`create_by` AS `createBy`, a.`create_date` AS `createDate`, a.`update_by` AS `updateBy`, a.`update_date
` AS `updateDate`, a.`remarks` AS `remarks` FROM 'js_sys_config' a ORDER BY a.`config_key`
11-18 11:40:54.481 DEBUG [com.s.t.SpringManagedTransaction ] - JDBC Connection [com.alibaba.druid.proxy.jdbc.ConnectionProxyImpl@321bdc] will not be managed
by Spring
11-18 11:40:54.482 DEBUG [c.j.modules.sys.dao.ConfigDao.findList ] - => Preparing: SELECT a.`id` AS `id`, a.`config_name` AS `configName`, a.`config_key` AS `conf
igKey`, a.`config_value` AS `configValue`, a.`is_sys` AS `isSys`, a.`create_by` AS `createBy`, a.`create_date` AS `createDate`, a.`update_by` AS `updateBy`, a.`upda
te_date` AS `updateDate`, a.`remarks` AS `remarks` FROM 'js_sys_config' a ORDER BY a.`config_key`
11-18 11:40:54.483 DEBUG [c.j.modules.sys.dao.ConfigDao.findList ] - ==> Parameters:
11-18 11:40:54.503 DEBUG [c.j.modules.sys.dao.ConfigDao.findList ] - ==> Total: 19
11-18 11:41:54.004 DEBUG [c.j.e.m.m.provider.SelectSqlProvider ] - OR: SELECT a.`id` AS `id`, a.`device_region_id` AS `deviceRegionId`, a.`device_key` AS `d
eviceKey`, a.`device_name` AS `deviceName`, a.`device_type` AS `deviceType`, a.`version_code` AS `versionCode`, a.`ip` AS `ip`, a.`wan_mac` AS `wanMac`, a.`wifi_mac
` AS `wifiMac`, a.`imei` AS `imei`, a.`channel` AS `channel`, a.`comm_pwd` AS `commPwd`, a.`secret` AS `secret`, a.`direction` AS `direction`, a.`online_flag` AS `o
nlineFlag`, a.`last_active_time` AS `lastActiveTime`, a.`person_count` AS `personCount`, a.`photo_count` AS `photoCount`, a.`finger_count` AS `fingerCount`, a.`palm
  
```

HFIMSServerV1.exe must be running all the time, otherwise the software page will prompt "can't be found".

Enter <http://server ip:8980/ims> in your browser

Indicates that the software is successfully started

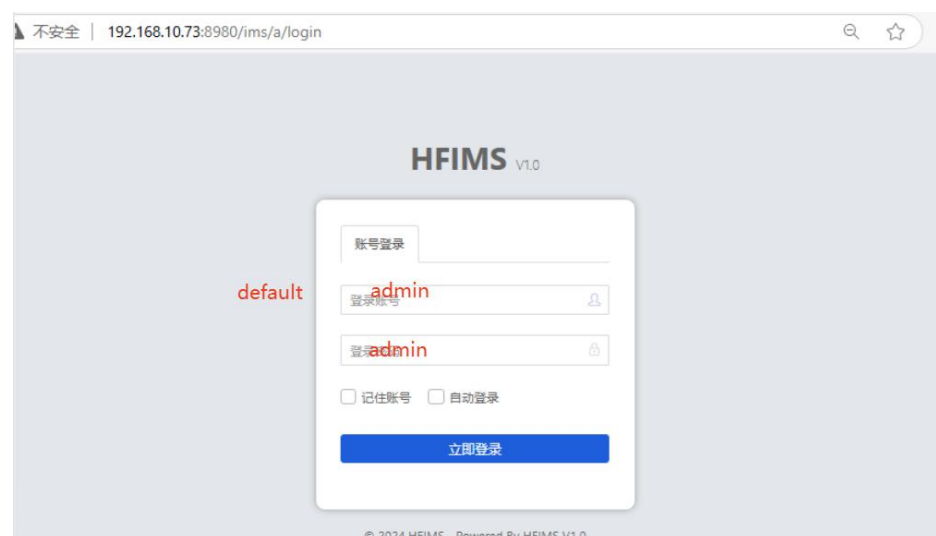

11. After successfully login in , enter this page, screenshot send HFSecurity

**Then officially authorize the English version software for the customer**

need 1、 2

