


Lab 10 Spring WebFlux & WebClient

1. GET /products

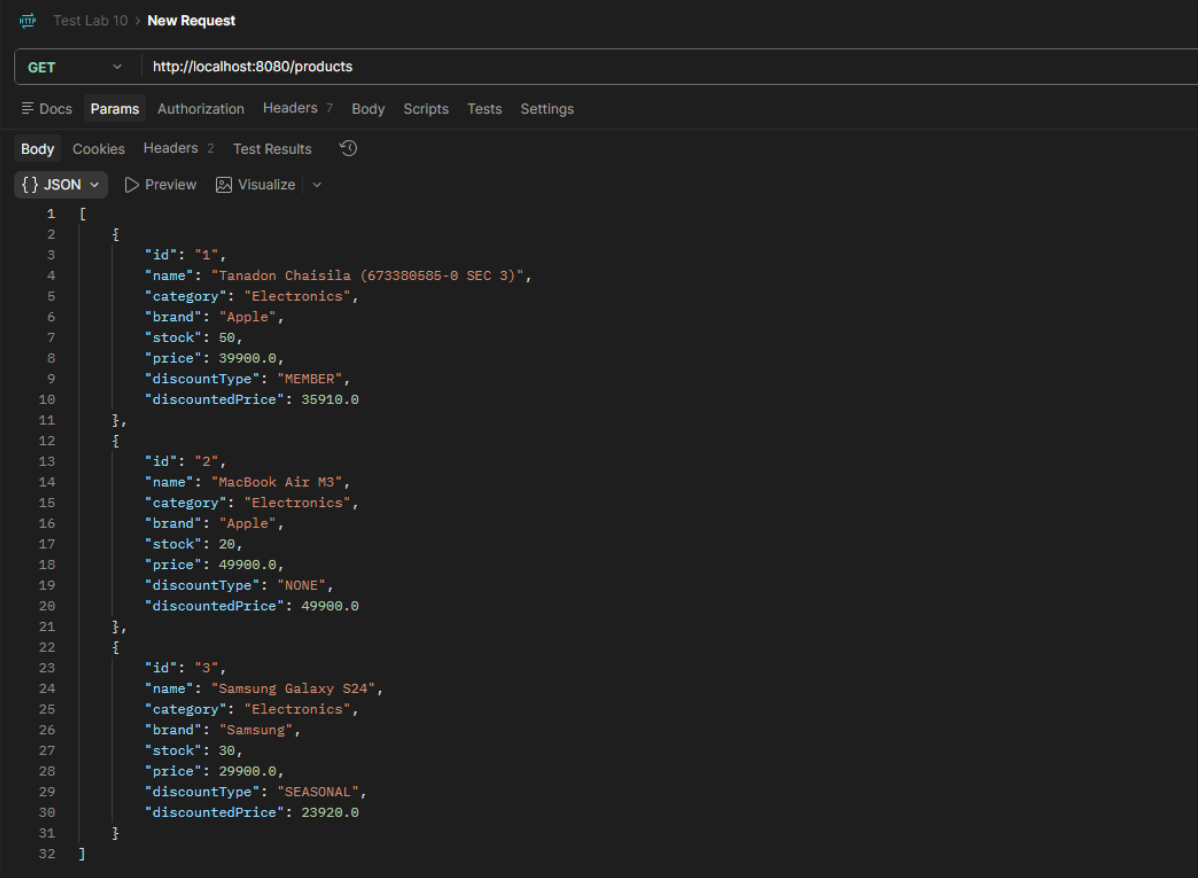

Test Lab 10 > New Request

GET http://localhost:8080/products


Docs Params Authorization Headers 7 Body Scripts Tests Settings

Body Cookies Headers 2 Test Results

{ } JSON Preview Visualize

```
1 [
2   {
3     "id": "1",
4     "name": "Tanadon Chaisila (673380585-0 SEC 3)",
5     "category": "Electronics",
6     "brand": "Apple",
7     "stock": 50,
8     "price": 39900.0,
9     "discountType": "MEMBER",
10    "discountedPrice": 35910.0
11  },
12  {
13    "id": "2",
14    "name": "MacBook Air M3",
15    "category": "Electronics",
16    "brand": "Apple",
17    "stock": 20,
18    "price": 49900.0,
19    "discountType": "NONE",
20    "discountedPrice": 49900.0
21  },
22  {
23    "id": "3",
24    "name": "Samsung Galaxy S24",
25    "category": "Electronics",
26    "brand": "Samsung",
27    "stock": 30,
28    "price": 29900.0,
29    "discountType": "SEASONAL",
30    "discountedPrice": 23920.0
31  }
32 ]
```

2. POST /products

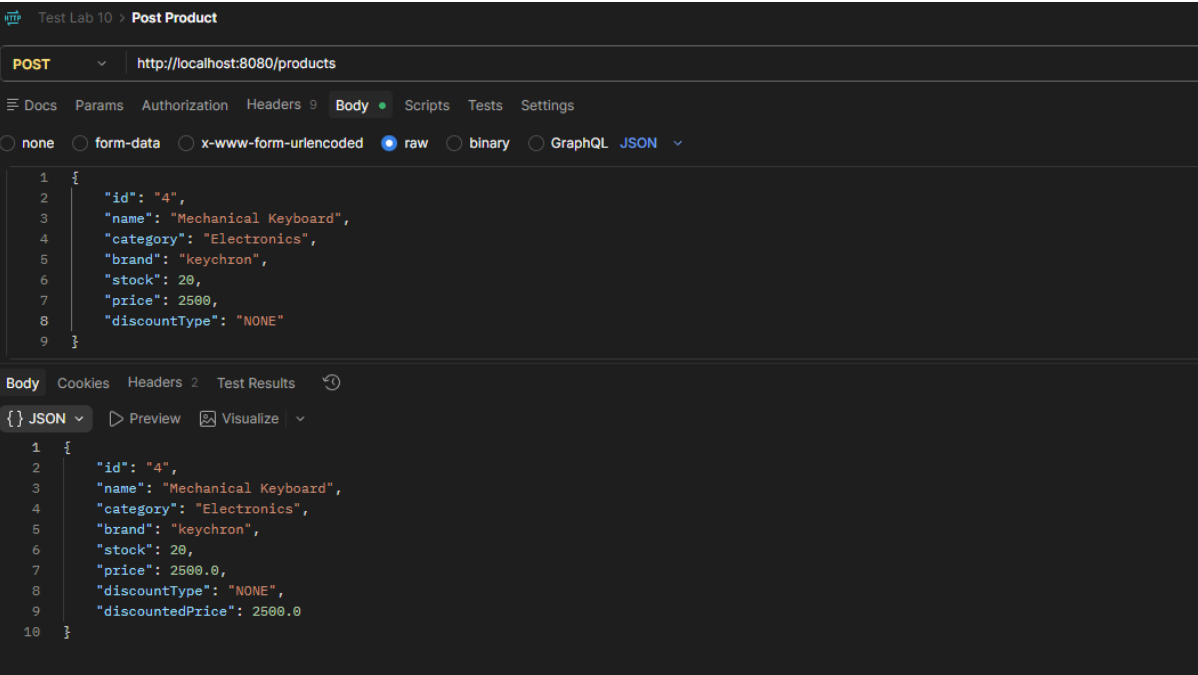

Test Lab 10 > Post Product

POST http://localhost:8080/products

Docs Params Authorization Headers 9 Body Scripts Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON


```
1 {
2   "id": "4",
3   "name": "Mechanical Keyboard",
4   "category": "Electronics",
5   "brand": "keychron",
6   "stock": 20,
7   "price": 2500,
8   "discountType": "NONE"
9 }
```

Body Cookies Headers 2 Test Results

{ } JSON Preview Visualize

```
1 {
2   "id": "4",
3   "name": "Mechanical Keyboard",
4   "category": "Electronics",
5   "brand": "keychron",
6   "stock": 20,
7   "price": 2500.0,
8   "discountType": "NONE",
9   "discountedPrice": 2500.0
10 }
```


3. DELETE /products/4

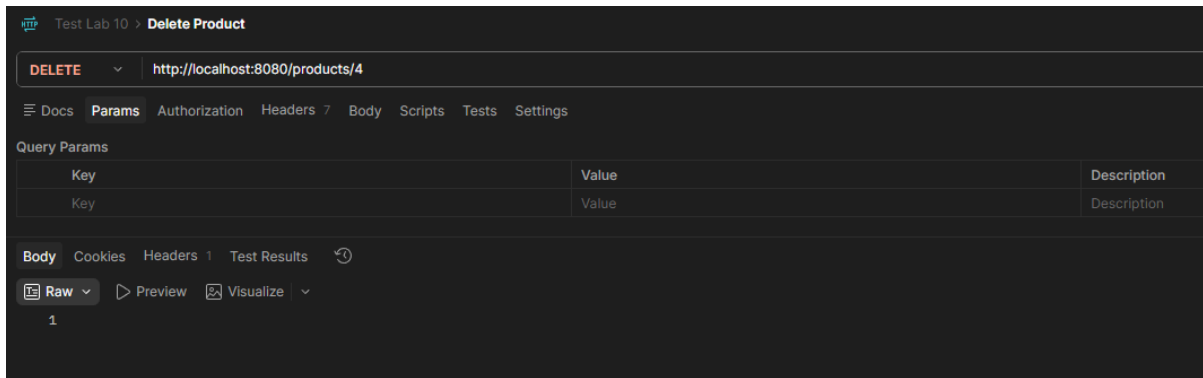

The screenshot shows the Postman interface for a DELETE request. The URL is `http://localhost:8080/products/4`. The 'Params' tab is selected, showing a table with two columns: 'Key' and 'Value', both containing the text 'Key'. The 'Body' tab is also visible, showing a 'Raw' body with the number '1'.

Key	Value	Description
Key	Value	Description


4. GET /products/category/Electronics

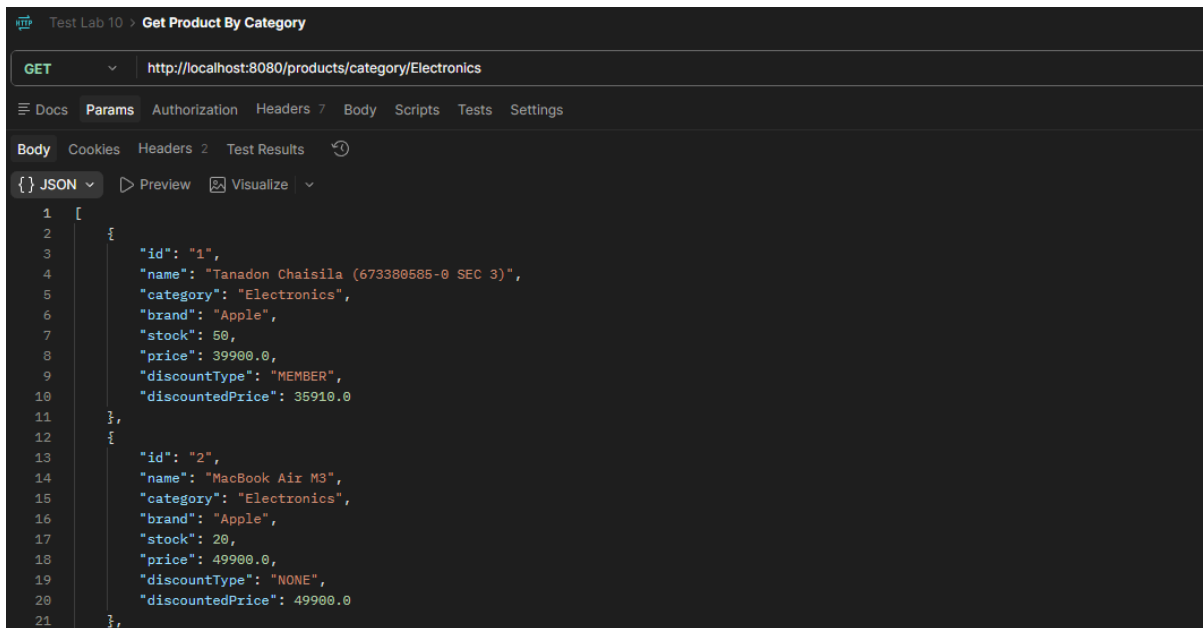

The screenshot shows the Postman interface for a GET request. The URL is `http://localhost:8080/products/category/Electronics`. The 'Body' tab is selected, showing a JSON response with two product objects.

```
1 [
2   {
3     "id": "1",
4     "name": "Tanadon Chaisila (673388585-0 SEC 3)",
5     "category": "Electronics",
6     "brand": "Apple",
7     "stock": 50,
8     "price": 39900.0,
9     "discountType": "MEMBER",
10    "discountedPrice": 35910.0
11  },
12  {
13    "id": "2",
14    "name": "MacBook Air M3",
15    "category": "Electronics",
16    "brand": "Apple",
17    "stock": 20,
18    "price": 49900.0,
19    "discountType": "NONE",
20    "discountedPrice": 49900.0
21  },
22 ]
```

5. GET /products/1/price

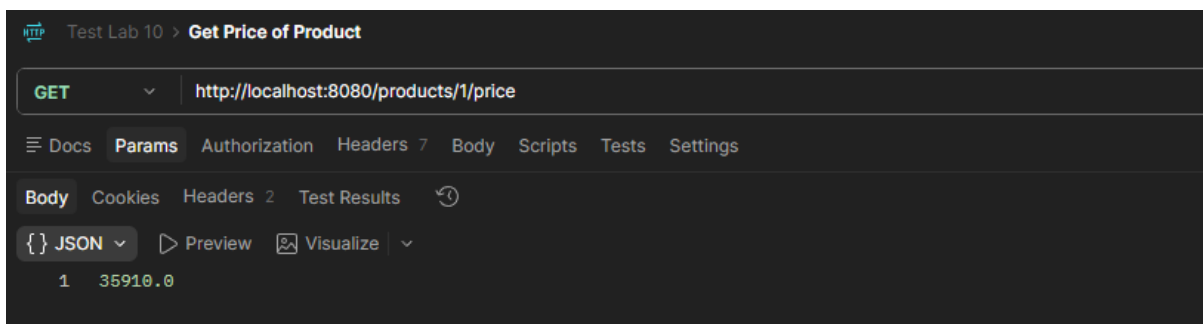

The screenshot shows the Postman interface for a GET request. The URL is `http://localhost:8080/products/1/price`. The 'Body' tab is selected, showing a JSON response with the price value.

```
1 35910.0
```