

Socket programming

- *Two socket types for two transport services:*
- **UDP:** unreliable datagram
- **TCP:** reliable, byte stream-oriented

Application Example:

1. client reads a line of characters (data) from its keyboard and sends data to server
2. server receives the data and converts characters to uppercase
3. server sends modified data to client
4. client receives modified data and displays line on its screen

Socket programming with UDP

UDP: no “connection” between client & server

- no handshaking before sending data
- sender explicitly attaches IP destination address and port # to each packet
- receiver extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- UDP provides *unreliable* transfer of groups of bytes (“datagrams”) between client and server

Client/server socket interaction: UDP

server (running on serverIP)

create socket, port= x:
`serverSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
read datagram from
`serverSocket`

↓
write reply to
`serverSocket`
specifying
client address,
port number

client

create socket:
`clientSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
Create datagram with server IP and
port=x; send datagram via
`clientSocket`

↓
read datagram from
`clientSocket`

↓
close
`clientSocket`

Example app: UDP client

Python UDPClient

```
include Python's socket library → from socket import *
serverName = 'hostname'
serverPort = 12000

create UDP socket for server → clientSocket = socket(AF_INET,
                                                    SOCK_DGRAM)

get user keyboard input → message = raw_input('Input lowercase sentence:')

Attach server name, port to message; send into socket → clientSocket.sendto(message.encode(),
                                                    (serverName, serverPort))

read reply characters from socket into string → modifiedMessage, serverAddress =
                                                    clientSocket.recvfrom(2048)

print out received string and close socket → print modifiedMessage.decode()
                                                    clientSocket.close()
```

Example app: UDP server

Python UDPServer

```
from socket import *
```

```
serverPort = 12000
```

create UDP socket → `serverSocket = socket(AF_INET, SOCK_DGRAM)`

bind socket to local port
number 12000 → `serverSocket.bind(('', serverPort))`

```
print ("The server is ready to receive")
```

loop forever → `while True:`

Read from UDP socket into
message, getting client's
address (client IP and port) → `message, clientAddress = serverSocket.recvfrom(2048)`
`modifiedMessage = message.decode().upper()`

send upper case string
back to this client → `serverSocket.sendto(modifiedMessage.encode(),
clientAddress)`

Socket programming with TCP

client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

client contacts server by:

- Creating TCP socket, specifying IP address, port number of server process

when client creates socket: client TCP establishes connection to server TCP

- when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - source port numbers used to distinguish clients (more later!)


application viewpoint:

TCP provides reliable, in-order byte-stream transfer (“pipe”) between client and server

Client/server socket interaction: TCP

server (running on `hostid`)

client

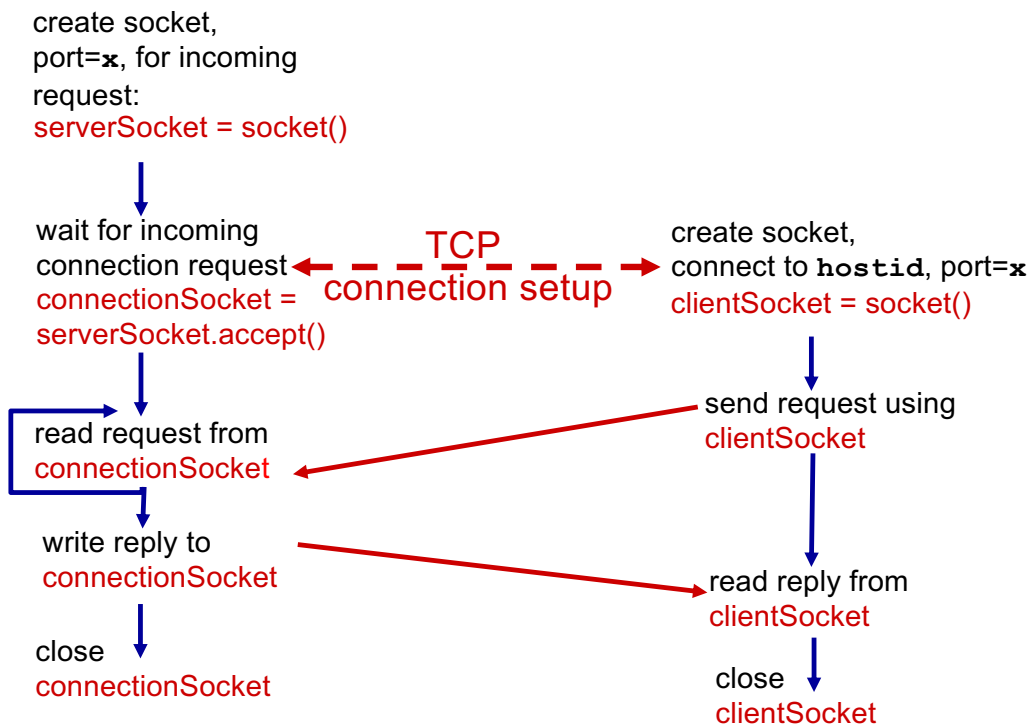

Example app: TCP client

Python TCPClient

create TCP socket for
server, remote port 12000

```
from socket import *
serverName = 'servername'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName, serverPort))
sentence = raw_input('Input lowercase sentence:')
clientSocket.send(sentence.encode())
modifiedSentence = clientSocket.recv(1024)
print ('From Server:', modifiedSentence.decode())
clientSocket.close()
```

No need to attach server
name, port

Example app: TCP server

Python TCPServer

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_STREAM)
serverSocket.bind(('', serverPort))
serverSocket.listen(1)
print 'The server is ready to receive'

while True:
    connectionSocket, addr = serverSocket.accept()

    sentence = connectionSocket.recv(1024).decode()
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence.
                           encode())
    connectionSocket.close()
```

create TCP welcoming
socket →

server begins listening for
incoming TCP requests →

loop forever →

server waits on accept()
for incoming requests, new
socket created on return →

read bytes from socket (but
not address as in UDP) →

close connection to this
client (but *not* welcoming
socket) →