pgDatabase Usage

You can upload the measured values to the server you set up to associate them with the DB and use the conditional statements in SQL to determine only the desired data values.


pgDatabase function usage is as follows:

I. pgDatabase Setting

1. Select **File – New**.




2. Select the File and click **Options** Icon.

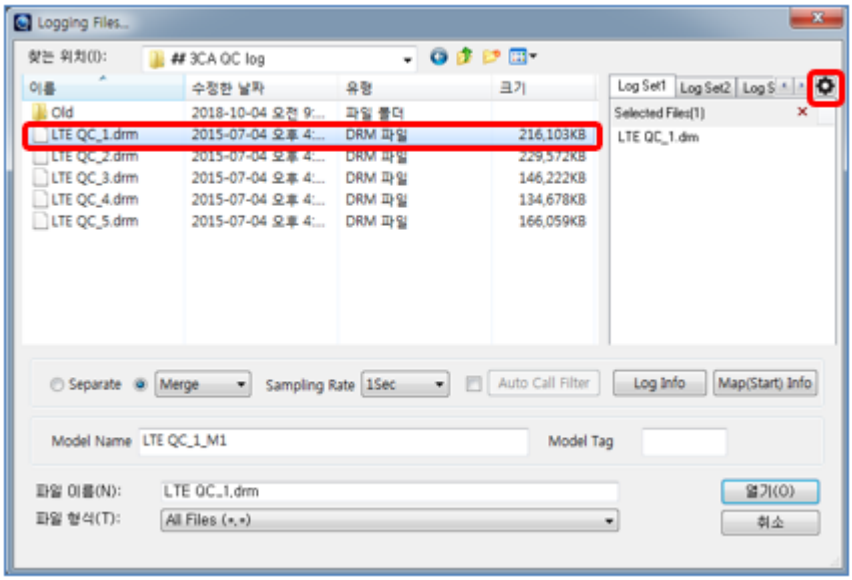


3. Click the **pgDatabase** button.

© Copyright by Accuver Co., Ltd.

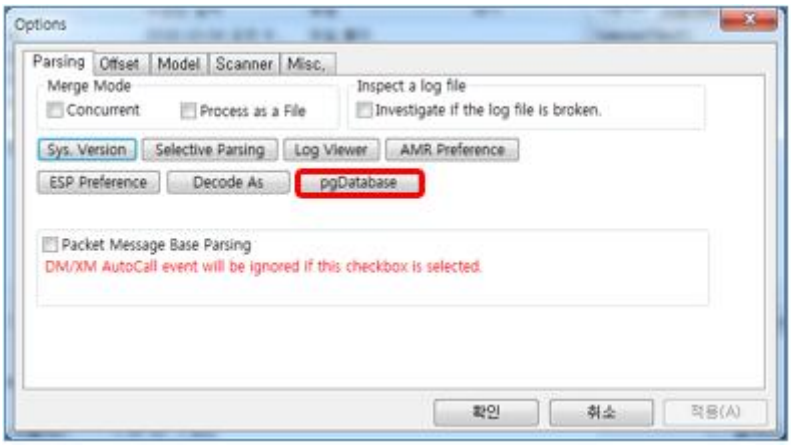

4. Set [Common] for pgDatabase Setting.

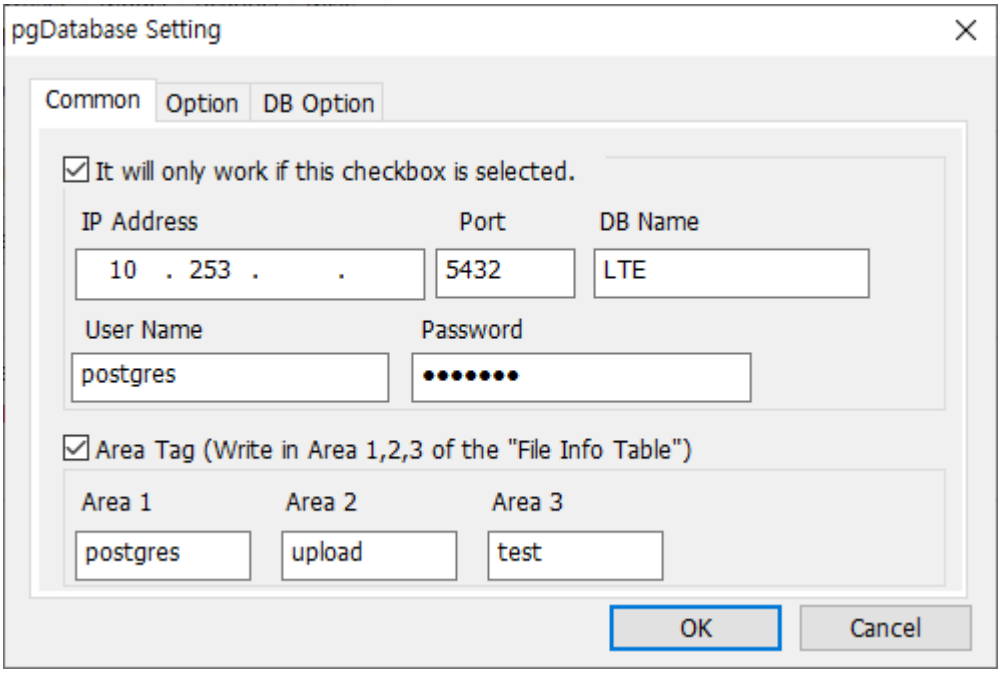

Classification	Description
It will only work if this checkbox is selected.	IP Address, Port, DB Name, User Name, and Password are enabled only when the corresponding checkbox is checked.
IP Address	Enter the IP address of the DB Server.
Port	Indicate the port used by the DB Server. (When you install Postgres DB, enter the port you set.)
DB Name	Indicate the name used by the DB server. (Create a new DB Name if it does not exist.)
User Name	Enter the user name used by the DB Server. (Enter the name you set when you installed Postgres DB, or enter the name you created with the new DB.)
Password	Enter password set by User Name.
Area Tag	Area 1, 2 and 3 functions are available when checking the checkbox.
Area 1,2,3	The values recorded in Area 1, 2, 3 are recorded in Area 1, 2, and 3 of the File Info Table in DB..

© Copyright by Accuver Co., Ltd.


pgDatabase Setting [Common] Window

(Note)Check area 1,2,3 on FILEINFO_TABLE

FILEINFO_TABLE | Enter a SQL expression to filter results (use Ctrl+Space)

	File Index	File Name	Start Time	End Time	Ver	UpdateTime	Area1	Area2	Area3
1	1	H:₩Decomp_₩2 (1).drm	2018-07-12 16:58:44.652	2018-07-12 16:59:11.579	0.7	2020-01-28 13:25:10.656	pgDatabase	upload	test
2	2	H:₩Decomp_₩2 (2).drm	2018-07-12 16:59:10.795	2018-07-12 16:59:53.359	0.7	2020-01-28 13:25:21.079	pgDatabase	upload	test
3	3	H:₩Decomp_₩2 (3).drm	2018-07-12 16:59:52.416	2018-07-12 17:00:19.742	0.7	2020-01-28 13:25:38.611	pgDatabase	upload	test
4	4	H:₩Decomp_₩2 (4).drm	2018-07-12 17:00:18.917	2018-07-12 17:00:52.549	0.7	2020-01-28 13:25:49.156	pgDatabase	upload	test
5	5	H:₩Decomp_₩2 (5).drm	2018-07-12 17:00:51.698	2018-07-12 17:01:18.741	0.7	[NULL]	pgDatabase	upload	test
6	6	H:₩Decomp_₩2 (8).drm	2018-07-12 17:02:26.244	2018-07-12 17:03:10.741	0.7	2020-01-28 13:28:21.530	pgDatabase	upload	test
7	7	H:₩Decomp_₩2 (9).drm	2018-07-12 17:03:09.919	2018-07-12 17:03:50.235	0.7	2020-01-28 13:28:40.487	pgDatabase	upload	test
8	8	H:₩Decomp_₩2 (10).drm	2018-07-12 17:03:49.359	2018-07-12 17:04:24.712	0.7	2020-01-28 13:28:50.791	pgDatabase	upload	test

5. Set [Option] for pgDatabase Setting.

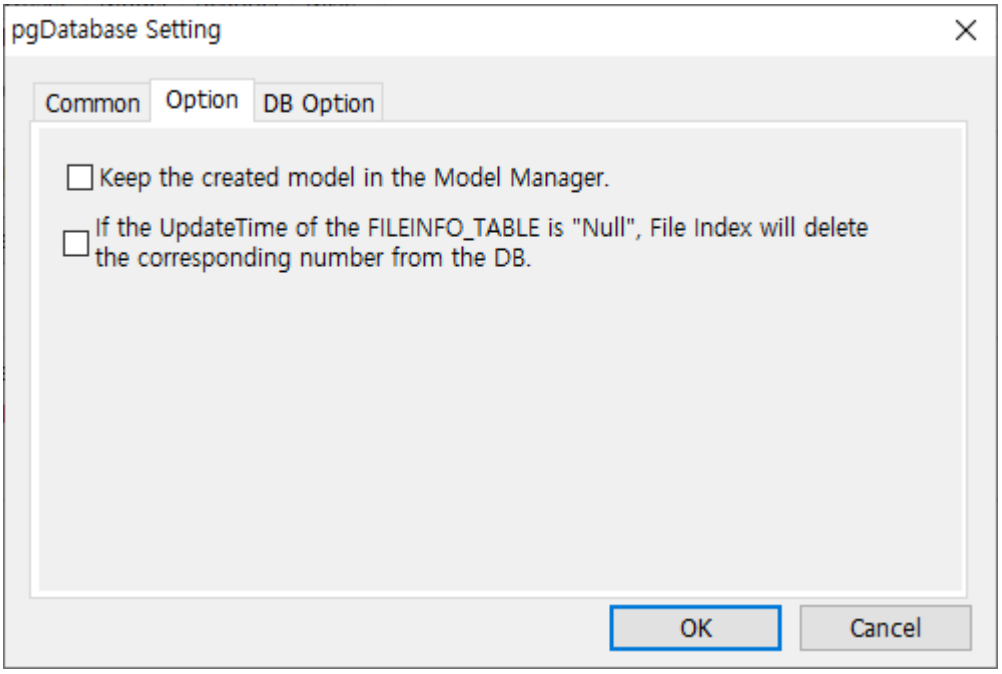

Classification	Description
Keep the created model in the Model Manager.	Create Model Manager only if the checkbox is checked (Single Process only, Default = Uncheck)
If the UpdateTime of the FILEINFO_TABLE is “Null”, File Index will delete the corresponding number from the DB.	If the UpdateTime of the FILEINFO_TABLE in DB is "Null", it is determined as invalid DB. Checking the option deletes all DB data that has a File Index with UpdateTime "Null". (This option is a one-time option. Default = Uncheck)

pgDatabase Setting [Option] Window


(Note) UpdateTime = Null state

© Copyright by Accuver Co., Ltd.

FILEINFO_TABLE | Enter a SQL expression to filter results (use Ctrl+Space)

	File Index	File Name	Start Time	End Time	Ver	UpdateTime	Area1	Area2	Area3
1	1	H:₩Decomp_₩2 (1).drm	2018-07-12 16:58:44.652	2018-07-12 16:59:11.579	0.7	2020-01-28 13:25:10.656	pgDatabase	upload	test
2	2	H:₩Decomp_₩2 (2).drm	2018-07-12 16:59:10.795	2018-07-12 16:59:53.359	0.7	2020-01-28 13:25:21.079	pgDatabase	upload	test
3	3	H:₩Decomp_₩2 (3).drm	2018-07-12 16:59:52.416	2018-07-12 17:00:19.742	0.7	2020-01-28 13:25:38.611	pgDatabase	upload	test
4	4	H:₩Decomp_₩2 (4).drm	2018-07-12 17:00:18.917	2018-07-12 17:00:52.549	0.7	2020-01-28 13:25:49.156	pgDatabase	upload	test
5	5	H:₩Decomp_₩2 (5).drm	2018-07-12 17:00:51.698	2018-07-12 17:01:18.741	0.7	[NULL]	pgDatabase	upload	test
6	6	H:₩Decomp_₩2 (8).drm	2018-07-12 17:02:26.244	2018-07-12 17:03:10.741	0.7	2020-01-28 13:28:21.530	pgDatabase	upload	test
7	7	H:₩Decomp_₩2 (9).drm	2018-07-12 17:03:09.919	2018-07-12 17:03:50.235	0.7	2020-01-28 13:28:40.487	pgDatabase	upload	test
8	8	H:₩Decomp_₩2 (10).drm	2018-07-12 17:03:49.359	2018-07-12 17:04:24.712	0.7	2020-01-28 13:28:50.791	pgDatabase	upload	test

6. Set [DB Option] for pgDatabase Setting.

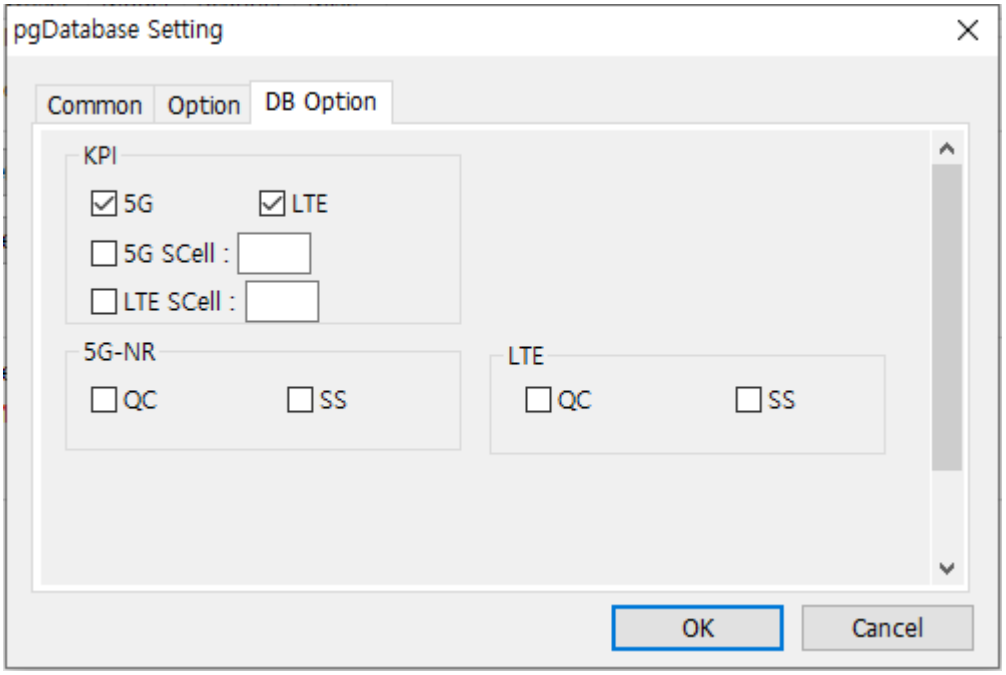


Classification	Description
Only checked items generate the DB Table.	Create a DB table only for checked items. (Default = 5G-NR QC, 5G-NR SS, LTE QC, LTE SS)

pgDatabase Setting [DB Option] Window

7. Finish the setting and click the **OK** button.


8. Finish pgDatabase setting and click **Open** button

© Copyright by Accuver Co., Ltd.

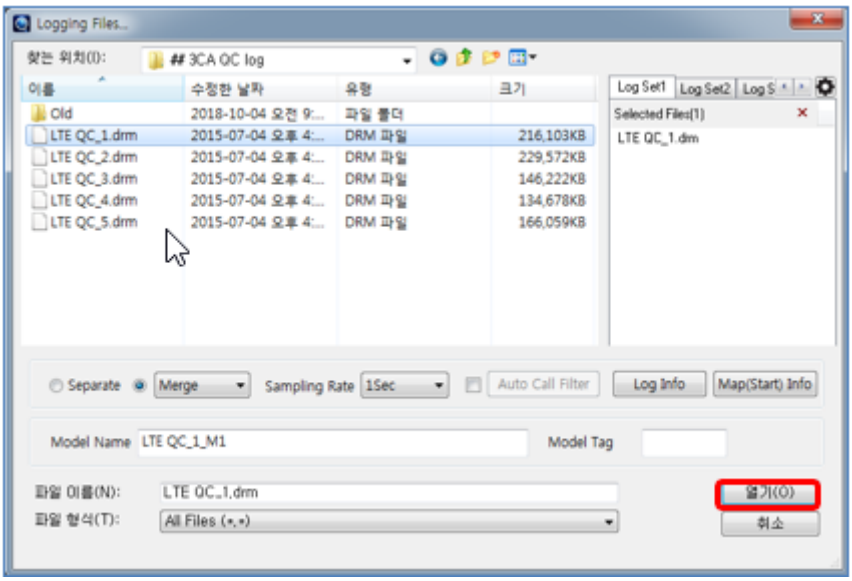

9. Postprocessing - pgDatabase will proceed.

   (DB Upload Steps)

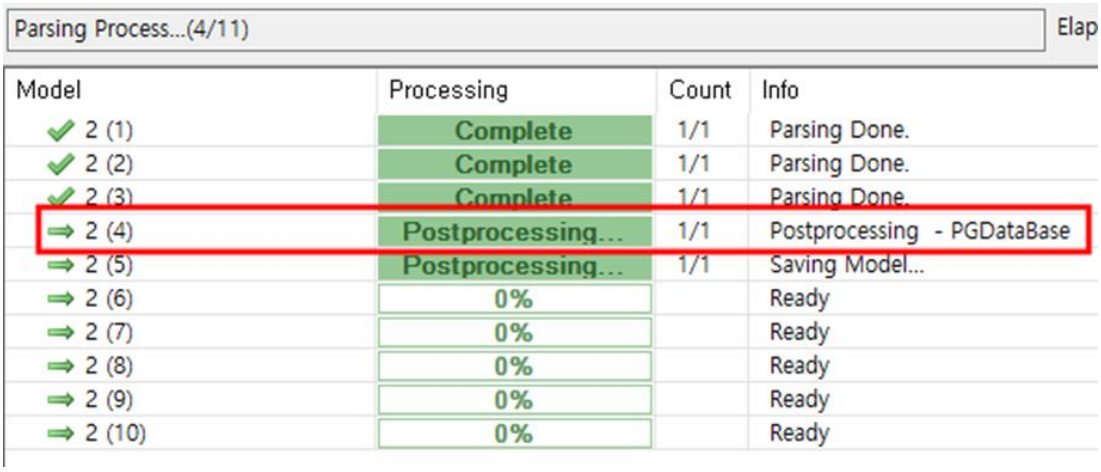

   (Confirm uploaded DB)

FILEINFO_TABLE | Enter a SQL expression to filter results (use Ctrl+Space)


	File Index	File Name	Start Time	End Time	Ver	UpdateTime	Area1	Area2	Area3
1	1	H:₩Decomp_₩2 (1).drm	2018-07-12 16:58:44.652	2018-07-12 16:59:11.579	0.7	2020-01-28 13:25:10.656	pgDatabase	upload	test
2	2	H:₩Decomp_₩2 (2).drm	2018-07-12 16:59:10.795	2018-07-12 16:59:53.359	0.7	2020-01-28 13:25:21.079	pgDatabase	upload	test
3	3	H:₩Decomp_₩2 (3).drm	2018-07-12 16:59:52.416	2018-07-12 17:00:19.742	0.7	2020-01-28 13:25:38.611	pgDatabase	upload	test
4	4	H:₩Decomp_₩2 (4).drm	2018-07-12 17:00:18.917	2018-07-12 17:00:52.549	0.7	2020-01-28 13:25:49.156	pgDatabase	upload	test
5	5	H:₩Decomp_₩2 (5).drm	2018-07-12 17:00:51.698	2018-07-12 17:01:18.741	0.7	[NULL]	pgDatabase	upload	test
6	6	H:₩Decomp_₩2 (8).drm	2018-07-12 17:02:26.244	2018-07-12 17:03:10.741	0.7	2020-01-28 13:28:21.530	pgDatabase	upload	test
7	7	H:₩Decomp_₩2 (9).drm	2018-07-12 17:03:09.919	2018-07-12 17:03:50.235	0.7	2020-01-28 13:28:40.487	pgDatabase	upload	test
8	8	H:₩Decomp_₩2 (10).drm	2018-07-12 17:03:49.359	2018-07-12 17:04:24.712	0.7	2020-01-28 13:28:50.791	pgDatabase	upload	test

© Copyright by Accuver Co., Ltd.

II. Added the pgDatabase re-upload capability

Upload Provides Re-upload of Failed Files.


1. Select the model and click the mouse right click, Re Upload Postgres DB to perform a re-upload.

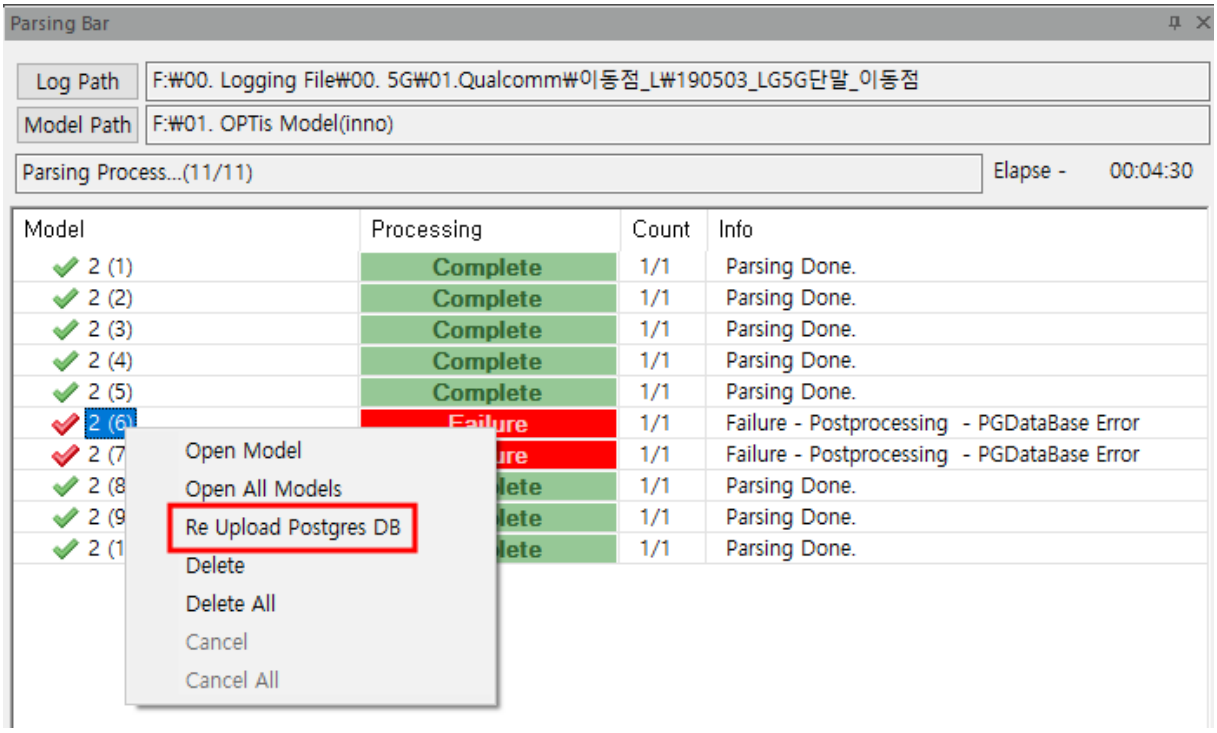

2. Re Upload Postgres DB will proceed.



3. Info status changes to Complete when reload is complete.

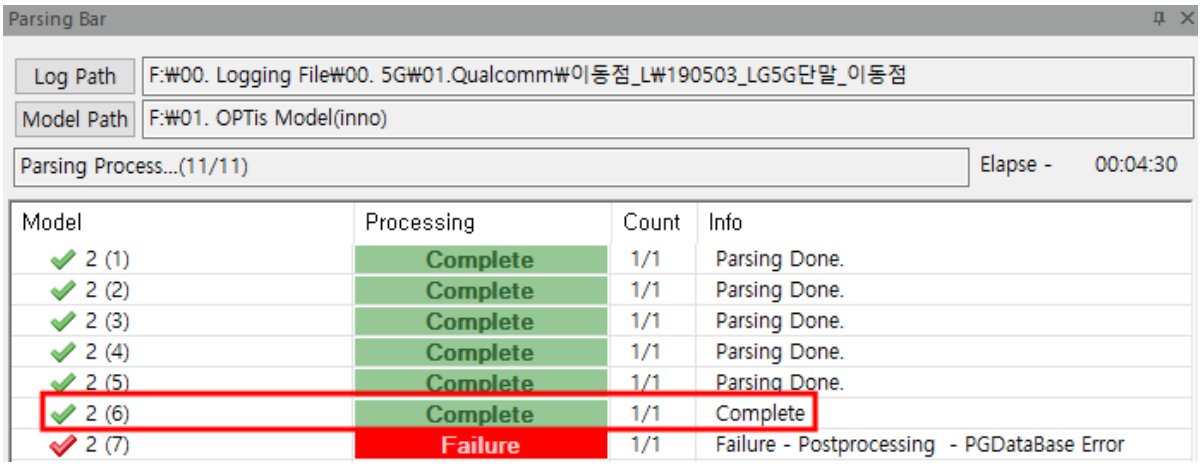

(Note) Check the re-uploaded DB

© Copyright by Accuver Co., Ltd.


FILEINFO_TABLE | Enter a SQL expression to filter results (use Ctrl+Space)

	File Index	File Name	Start Time	End Time	Ver	UpdateTime	Area1	Area2	Area3
1	1	H:₩Decomp_₩2 (1).drm	2018-07-12 16:58:44.652	2018-07-12 16:59:11.579	0.7	2020-01-28 13:25:10.656	pgDatabase	upload	test
2	2	H:₩Decomp_₩2 (2).drm	2018-07-12 16:59:10.795	2018-07-12 16:59:53.359	0.7	2020-01-28 13:25:21.079	pgDatabase	upload	test
3	3	H:₩Decomp_₩2 (3).drm	2018-07-12 16:59:52.416	2018-07-12 17:00:19.742	0.7	2020-01-28 13:25:38.611	pgDatabase	upload	test
4	4	H:₩Decomp_₩2 (4).drm	2018-07-12 17:00:18.917	2018-07-12 17:00:52.549	0.7	2020-01-28 13:25:49.156	pgDatabase	upload	test
5	5	H:₩Decomp_₩2 (5).drm	2018-07-12 17:00:51.698	2018-07-12 17:01:18.741	0.7	[NULL]	pgDatabase	upload	test
6	6	H:₩Decomp_₩2 (8).drm	2018-07-12 17:02:26.244	2018-07-12 17:03:10.741	0.7	2020-01-28 13:28:21.530	pgDatabase	upload	test
7	7	H:₩Decomp_₩2 (9).drm	2018-07-12 17:03:09.919	2018-07-12 17:03:50.235	0.7	2020-01-28 13:28:40.487	pgDatabase	upload	test
8	8	H:₩Decomp_₩2 (10).drm	2018-07-12 17:03:49.359	2018-07-12 17:04:24.712	0.7	2020-01-28 13:28:50.791	pgDatabase	upload	test
9	9	H:₩Decomp_₩2 (6).drm	2018-07-12 17:01:17.876	2018-07-12 17:01:59.169	0.7	2020-01-28 14:12:28.591	pgDatabase	upload	test


© Copyright by Accuver Co., Ltd.

III. Setting Error - Windows Setting : pg_hpa.conf Actions


1. Creating a model after setting results in a pg_hpa.conf popup.

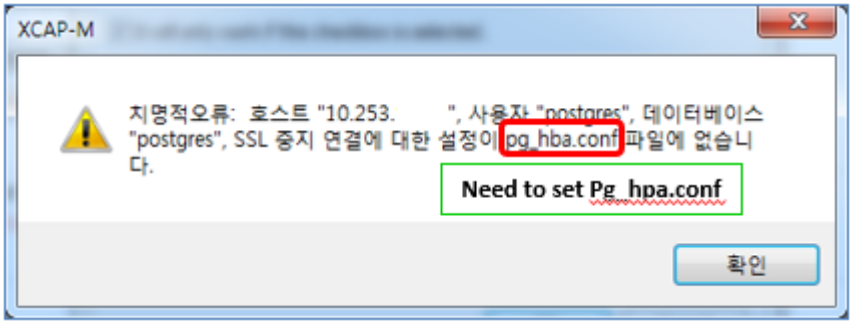

2. Open the pg_hpa.conf file in C:\Program Files\PostgreSQL\10\data.

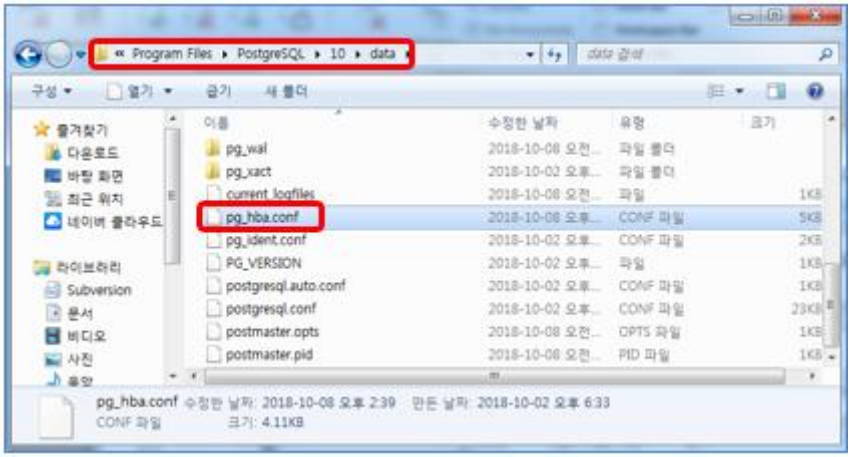

3. Set the Pg_hpa.conf file as below and save it.

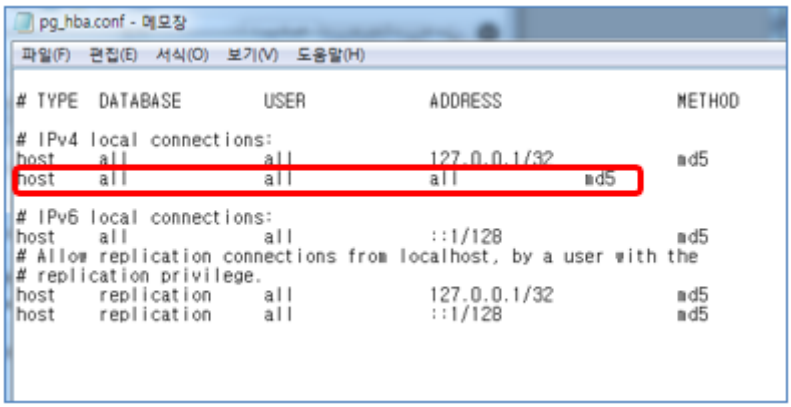

© Copyright by Accuver Co., Ltd.

Notice)

Progress the below item setting in pg_hpa.conf file.

TYPE, DATABASE, USER, ADDRESS, METHOD setting

host all all all md5

Why ADDRESS should be set to ALL.


- ADDRESS is an entry that lists the IP that can be accessed on the PC you have set.
- If not set as All, you must enter the access IP one by one.
- If set as All, all IPs enables to access.

The meaning of the # in front of the sentence means, 'Do not use that column'.


© Copyright by Accuver Co., Ltd.

IV. Setting Error - Windows Setting : TCP/IP connection on port action

1. If the below pop-up occurs, you must add Windows Firewall.

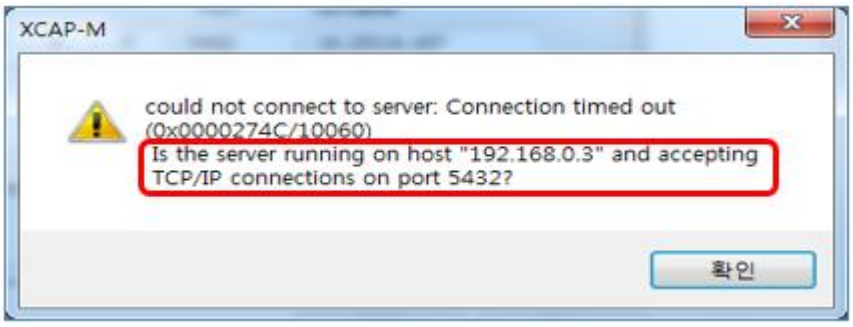


2. Go to [Control Panel] > [Windows Defender Firewall] > [Advanced Settings].

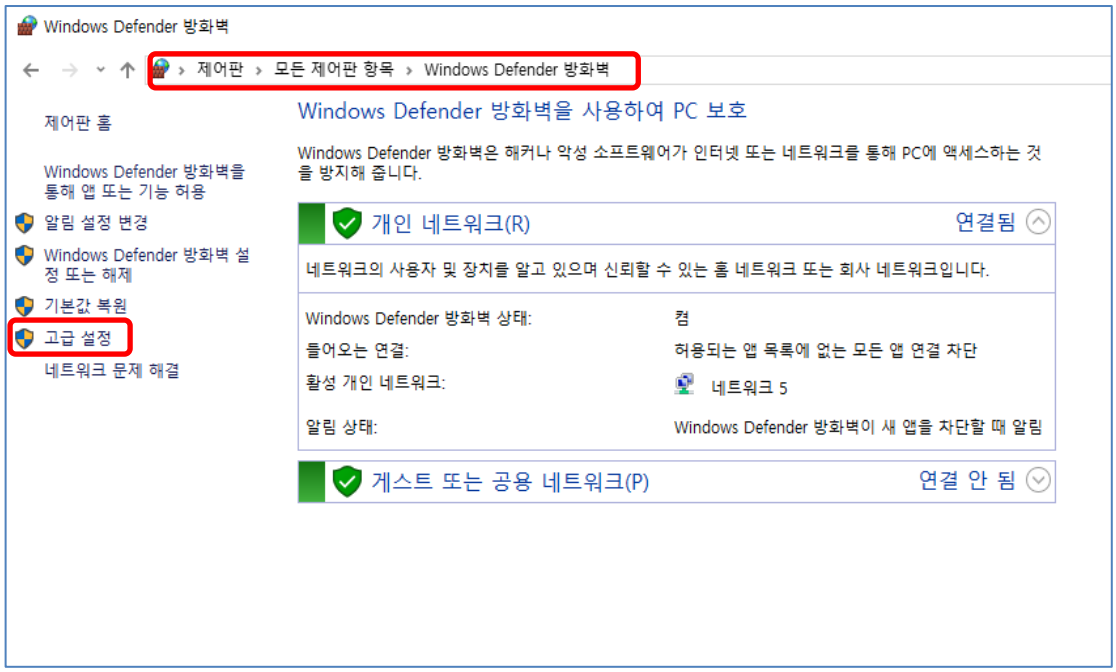


3. Click [Inbound Rules] -> [New Rules].


© Copyright by Accuver Co., Ltd.

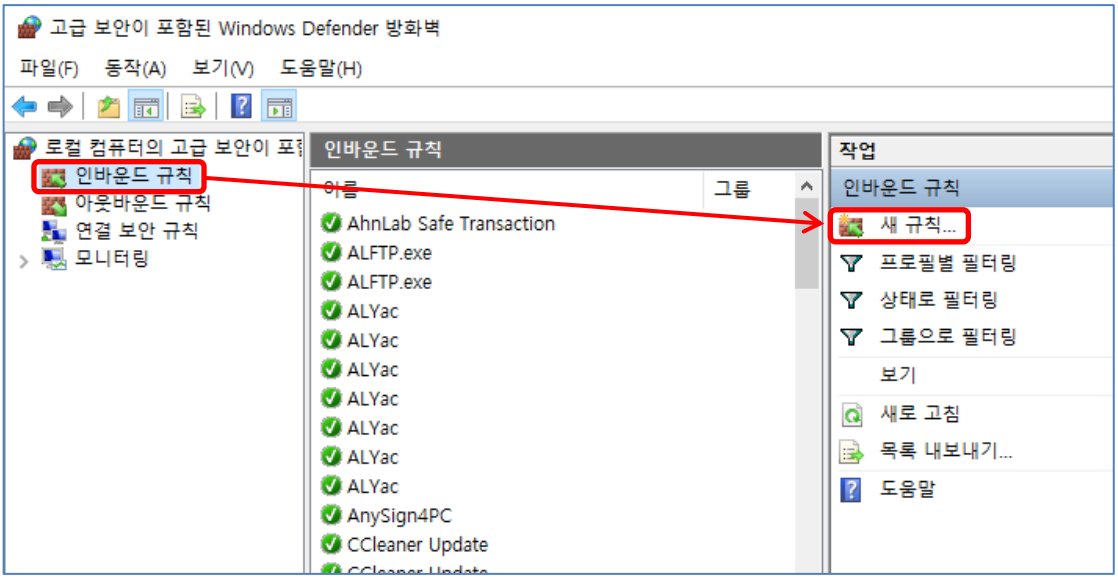

4. Select [Port].

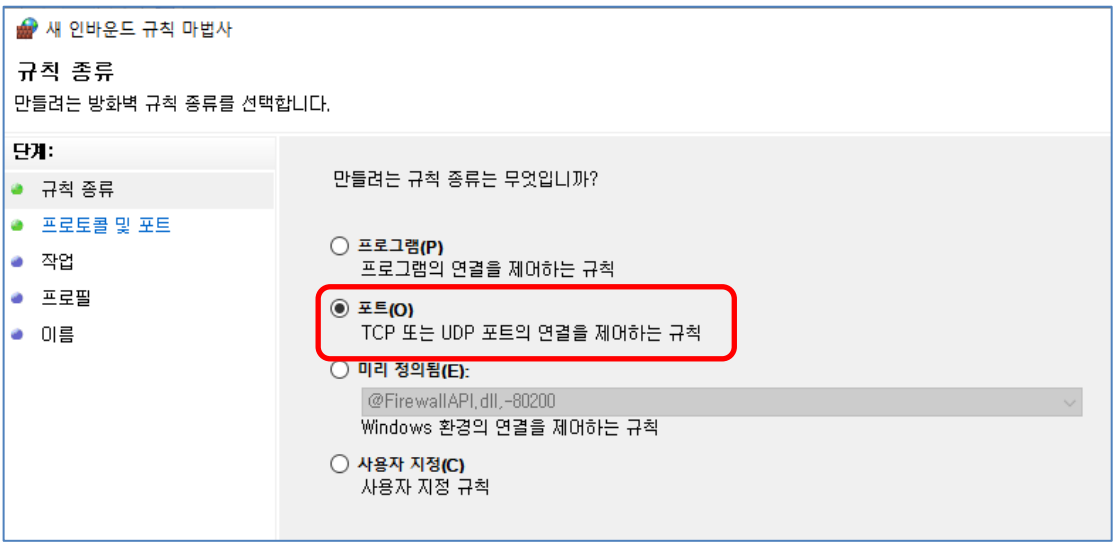


5. Select TCP or UDP type and input port configured in the pgDatabase. (Port : 5432)

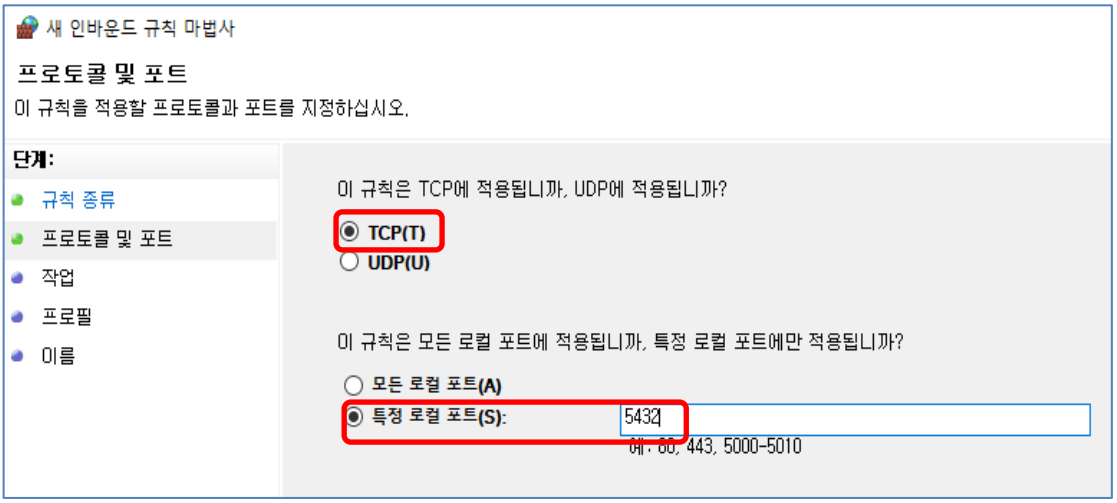


© Copyright by Accuver Co., Ltd.

6. Select [Allow connection].

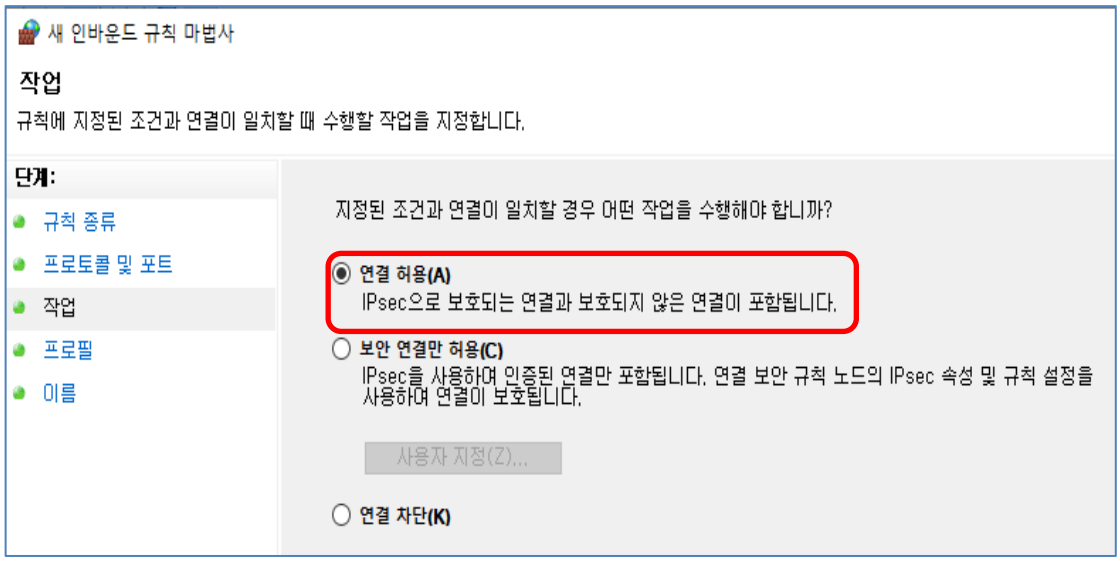


7. Input a name of the rule. (ex: Postgres 5432)

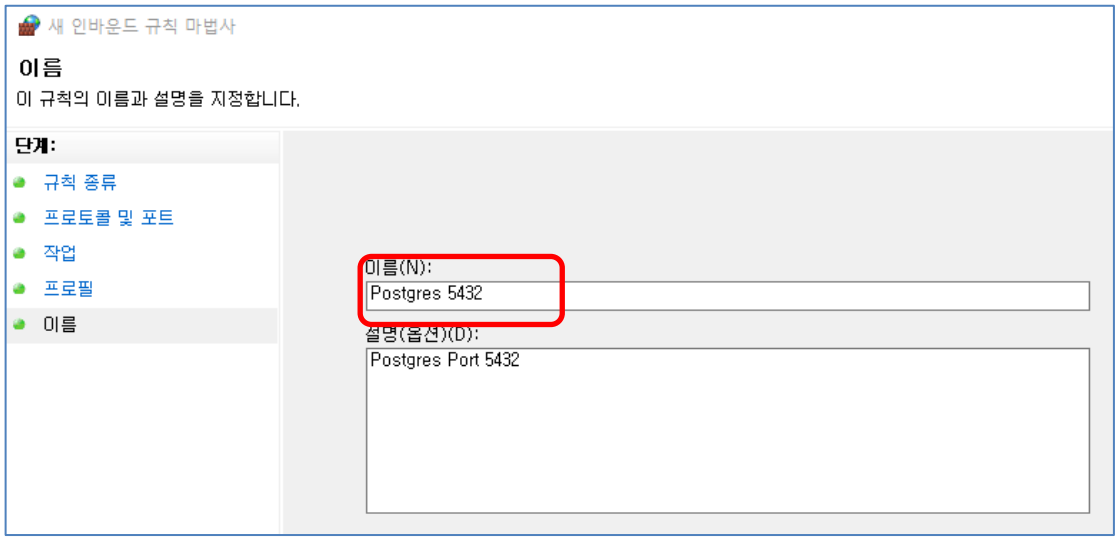

8. The settings are completed if the inbound rule is found in the list.

© Copyright by Accuver Co., Ltd.

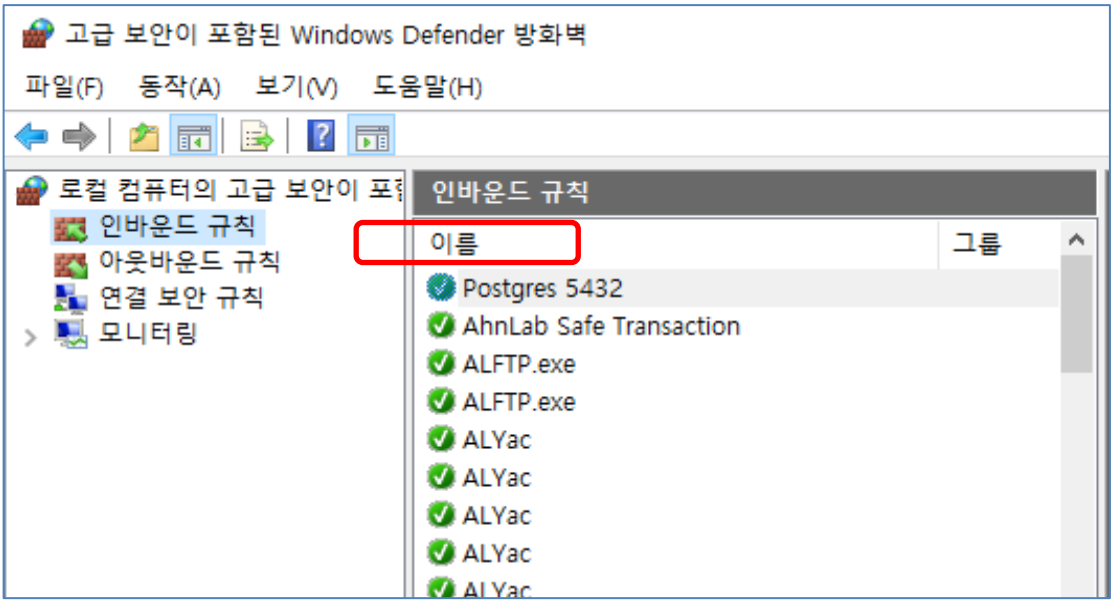

© Copyright by Accuver Co., Ltd.