


Fig S6 | Two processing errors we found in our own completed analyses

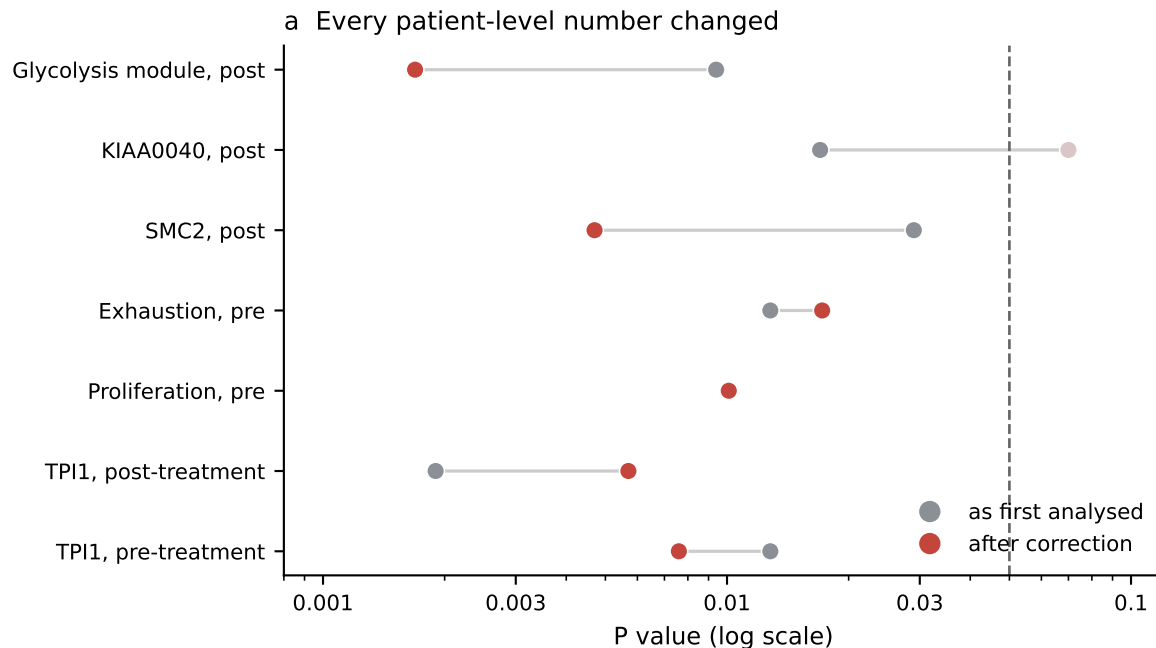

b Error 1 — re-normalisation

$\log_2(\text{TPM}+1)$ values passed through `NormalizeData()`.

Diagnostic: back-solved per-cell sums.

correct object $9.94 \times 10^5 \approx 10^6$ ✓

affected object no clean solution ✗

Spearman between versions: 0.874 (not 1.0),
so it is not a monotone rescaling.

Cell-level rank tests unaffected; patient-level means are not.

Error 2 — merged response labels

Patients with two post-treatment biopsies can carry different outcomes:

Post_P1 responder Post_P1_2 non-responder

Post_P5 non-responder Post_P5_2 responder

These had been collapsed into one label per patient.

Corrected samples: 9R/10NR pre, 8R/20NR post.

The criterion for error 1 is whether the SOURCE file is already normalised — not whether a derived object matches it. Applying the same test to the second cohort gives the opposite answer.