Registration date: January 21, 2026

Follow-up Notes

Company Plugin V04

Cegid Retail Y2 – Version 26

cegid

Make more possible

Preamble

This plugin is a set of web services associated with one or more versions of Cegid Retail Y2.
This document describes its scope of implementation, as well as the changes and corrections made.
Please note: All plugin methods and services can be cited in this document. Only public methods for which the contract is published can be used by applications not designed by Cegid.

Legal notices

Permission is granted under this Agreement to download documents held by Cegid and to use the information contained in the documents only internally, provided that: (a) the copyright notice on the documents remains on all copies of the document; material; (b) the use of these documents for personal and non-commercial use unless it has been clearly defined by Cegid that certain specifications may be used for commercial purposes; (c) documents will not be copied to networked computers or published on any type of media unless expressly authorized by Cegid; and (d) no changes are made to these documents.

Contents

Preamble 2

1. OBJECTIVES 4

Documentation 4

Y2 versions 5

2. STORES 6

GetDetail 6

GetListDetail 7

3. WAREHOUSES 9

GetDetail 9

GetListDetail 10

4. TRIGGERS 11

GetListDetail 11

GetDetail 11

Create 12

Update 13

Evaluate 14

5. STORESLISTS 15

Create 15

GetListDetail 15

GetDetail 16

Delete 16

6. SUBSIDIARIES 17

GetListDetail 17

GetDetail 17

7. STORES - USERDEFINEDTABLES 19

GetValue 19

8. OTHER 20

Net Framework 4.8 20

Deployment 20

1. Objectives

The objective of the **Company** plugin is to provide services relating to the management of stores and warehouses in a network of stores.
This service will be gradually enriched.

Reminder: Only public methods for which the contract is published can be used by applications not designed by Cegid. Cegid reserves the right to modify private services without ensuring backward compatibility, and without informing users.

Documentation

The service contract documentation is visible on the IIS server(s) from the software package download page:

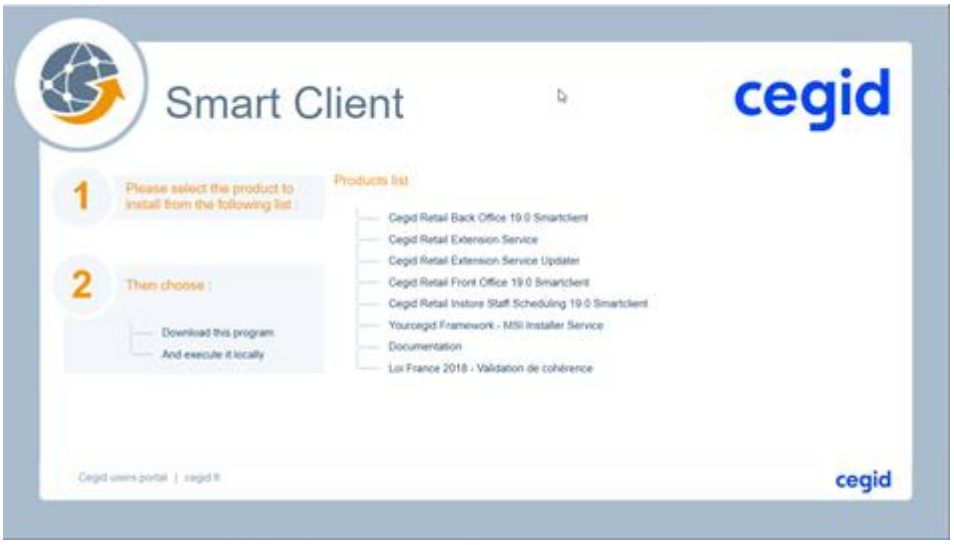

"Documentation" is a link that provides access to the documentation list:

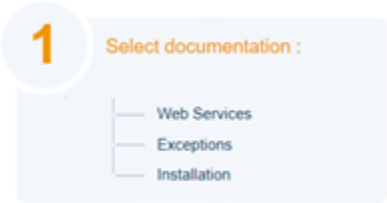

➔ **Web Services**
The screen displayed provides access to the Web Services contracts and their properties
Please note: the absence of a contract in the Web Services documentation screen means that the service is not installed or is not public.

- **Exceptions**
  This part provides access to exceptions, classified by type, and according to the plugin.

- **Installation**
  This page allows you to download Web Services installation and consumption documentation.

Y2 versions

This plugin is compatible with the following versions of Cegid Retail Y2:

- Version 26

Note:
The # sign at the beginning of the plugin build number corresponds to the major version of Cegid Retail Y2.

2. STORES

Store are managed by Cegid Retail Y2 with a lot of information. A store record is populated through tabs:

- ➔ Contact information
- ➔ Information
- ➔ Additions
- ➔ Third-party
- ➔ Linked warehouses
- ➔ Accounting
- ➔ Store staff
- ➔ Miscellaneous
- ➔ User fields
- ➔ E-Commerce
- ➔ Replenishment
- ➔ Delivered/picked up

Or displays another entry form when you use the available option buttons:

- ➔ List of contacts
- ➔ Management of counters linked to the store
- ➔ Bank accounts
- ➔ Store settings store for portable inventory input terminals

All this information allows you to define the input environment for a user linked to the store by their user record, or by the store specified in the header of the document being created.

GetDetail

➔ Objectives

This method returns the detail of a store called by its unique identifier.
A part of the store data is returned by this method, with more or less information depending on the tags present in the "Fields" property. This method will be progressively enriched.

The following business rules are applied:

- ➔ The "Id" property is mandatory. The search is performed on the exact value transmitted. In case of unknown code, the reply contains empty information.
- ➔ The user provides the filtering through the user restrictions of their user record. If the store is not authorized for the user, the system returns "Store prohibited" reply.

➔ Improvements

Addition of the 4th address line

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
RLO	12/19/2022	A2351		144987	#3.15	

Checking the length of the internal identifiers provided.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EPL	5/15/2023			165484	#3.142	

Added Airport store

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EBU	1/16/2024			217887	#3.251	

Further optimization of the search for linked stores and warehouses. The management of data collections is reviewed in order to force the assessment of collections as soon as they are read in the database.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
HDA	5/6/2024			256820	#3.299	

The service no longer raises an exception and now returns the value "Other" for the store type if it is not initialized in the database.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
HDA	7/18/2024			279905	#3.315	

Added the 2D-barcode template used in the store.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
ADU	8/26/2024			292067	#3.334	

Added value "None" to the scope of the user restriction, which allows the user to obtain information about the requested store even if it is forbidden to the user.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
NAC	9/2/2024			294321	#3.337	

The WarehouseId property changes to Obsolete status, before disappearing in future releases.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
PLA	5/20/2025	1789036		392199	#3.445	

GetListDetail

➔ Objectives

This method recovers the store list of the folder based on the defined criteria.
The business rules are recovered from the *GetDetail* method.

➔ Improvements

Addition of the 4th address line

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
RLO	12/19/2022	A2351		144987	#3.15	

Increased the limit on the number of internal and external identifiers for stores from 200 to 1,000 and improved the performance of warehouse searches.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EBU	1/15/2024			217391	#3.247	

Added Airport store

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EBU	1/16/2024			217887	#3.251	

Optimization of the search for stores, the query on linked warehouses (METABDEPOT table) is subject to the presence of the "warehouses" value in the Fields field.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
RLO	4/26/2024			252660	#3.296	

Further optimization of the search for linked stores and warehouses. The management of data collections is reviewed in order to force the assessment of collections as soon as they are read in the database.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
HDA	5/6/2024			256820	#3.299	

The service no longer raises an exception and now returns the value "Other" for the store type if it is not initialized in the database.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
HDA	7/18/2024			279905	#3.315	

Added the 2D-barcode template used in the store.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
ADU	8/26/2024			292067	#3.334	

Added value "None" to the user restriction scope, enabling the user's default restriction to be applied.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
NAC	9/2/2024			294321	#3.337	

3. WAREHOUSES

Cegid Retail Y2 always uses two entities:

- ➔ The store as a price management entity.
- ➔ The warehouse as an inventory management entity.

In case of a single warehouse folder, the creation of the store automatically the creation of the warehouse that retrieves the store data. The warehouse will not be requested when making entries, even if it exists, but it is systematically specified.
In this case, it is advisable to specify in the services the warehouse with the store code.

In a **multi-warehouse** folder context, warehouses are managed in Cegid Retail Y2 with a lot of information. A warehouse record is populated through tabs:

- ➔ Contact information
- ➔ Information

The list of contacts of the warehouse in the repository can be filled in after calling an option with the buttons.

GetDetail

➔ Objectives

This method returns the detail of a warehouse called by its unique identifier.
A part of warehouse data is returned by this method, with more or less information depending on the tags present in the "Fields" property. This method will be progressively enriched.

The following business rules are applied:

- ➔ The "Id" property is mandatory. The search is performed on the exact value transmitted. If the code is unknown, the system returns a "Store unknown" reply.
- ➔ The user provides the filtering through the user restrictions of their user record (Inventory query.) If warehouse is not authorized for the user, the system returns a "warehouse prohibited" reply.
- ➔ If the "Closed" property is missing, all warehouses are returned.
- ➔ If the "CountryId" information is filled in, the search is performed on the exact value transmitted.
- ➔ The "TransferNoticesManagement" (GDE_SURSITEDISTANT) property can only be true (checked) if the ET_SURSITEDISTANT field of the affiliated store is checked.
- ➔ The "GeographicalSite" (GDE_SITEGEO) property can only be filled in if the "RemoteSite" (GDE_DEPOTDEPORTE) field of the warehouse is checked.

The Fields field is completed by a new tag ***UserDefinedFields*** used to return user-defined warehouse information:

Collection (1 to 3) of user-defined amounts
Collection (1 to 3) of user-defined dates
Collection (1 to 20) of user-defined tables
Collection (1 to 3) of user-defined texts
Collection (1 to 3) of user-defined decisions.

Update of the method to search for the details of a warehouse using the external reference:

➔ Improvements

Addition of the 4th address line

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
RLO	12/19/2022	A2351		144987	#3.15	

Checking the length of the internal identifiers provided.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EPL	5/15/2023			165484	#3.142	

GetListDetail

➔ Objectives

This method recovers the warehouse list of the folder based on the defined criteria.
The business rules are recovered from the *GetDetail* method. The Fields field is completed by a new tag ***UserDefinedFields*** used to return user-defined warehouse information:

Collection (1 to 3) of user-defined amounts
Collection (1 to 3) of user-defined dates
Collection (1 to 20) of user-defined tables
Collection (1 to 3) of user-defined texts
Collection (1 to 3) of user-defined decisions.

It is not possible to search simultaneously using both internal and external references. In this case, a response "It is not possible to perform a search with both an internal identifier and an external identifier of the warehouse is returned.

➔ Improvements

Addition of the 4th address line

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
RLO	12/19/2022	A2351		144987	#3.15	

Increased the limit on the number of internal and external identifiers for warehouses from 200 to 1,000 and improved the performance.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
EBU	1/15/2024			217391	#3.247	

4. TRIGGERS

Modules such as loyalty, sales conditions, entry of user-defined tables, and payment methods use filters based on entities such as stores, customers, items, suppliers or payment methods.
Example: Apply a sales condition to stores of type "Branches". Triggers have been created for this purpose, allowing to define filters that depend on the value of certain fields.
This service provides the GetListDetail, GetDetail, Create, Update, and Evaluate methods with SOAP and RestFul compatibility.

GetListDetail

➔ Objectives

Use this method to search for available store triggers based on the following search criteria:

- Description of the trigger(s) to be returned
  Optional (to recover, if necessary, all the triggers present in the database)
  The search on this criterion uses the LIKE wildcard
- Scope of use of the trigger
- Fields: Filtering the requested information
- Paging

With SOAP and RestFull compatibility

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	11/14/2022	A2375		138100	#2.310	

➔ Improvements

The method is now set to status Beta

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
ADU	2/4/2025	A2508		352490	#3.387	

GetDetail

➔ Objectives

This method allows you to view settings of a store trigger, according to the following search criteria:

- Id: Identifier of the store trigger (required).
- Fields: Filtering returned information

- System fields of the store list
- Details of the settings of the store trigger

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	11/14/2022	A2375		138100	#2.310	

➔ Improvements

The method is now set to status Beta

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
ADU	2/4/2025	A2508		352490	#3.387	

Create

➔ Objectives

- This method is used to create a new store trigger of type "Fields", "List of stores", or "Grouping":

- You must provide a description, the scope(s) of use and the detail of the trigger, the content of which depends on the type of trigger you want to create:

- Creation of a trigger of type "List of stores"

➔Comment on the trigger (Optional)
➔ Identifier of the user restriction category (Optional)
➔ Code of the store list (the store list must exist and a blocking check is performed)

- Creation of a trigger of type "Fields"

➔Comment on the trigger (Optional)
➔ Identifier of the user restriction category (Optional)
➔ Details about the fields:

Lines must be filled in progressively: a line can only be filled in if it is the first line or if the previous line is filled in.

- Exception in the case of line 4 which can only be filled in if the first line is filled in (and not line 3.)
- A line is either empty or filled with the 3 pieces of information: Field / Field operator / Value.
- If line 2, 3, 5 or 6 is filled in, the operator of the previous line must be specified.

--1-- --FIELD-- --OPE-- --VALUE-- --LINE OPE
--2-- --FIELD-- --OPE-- --VALUE-- --LINE OPE
--3-- --FIELD-- --OPE-- --VALUE-- --

-- LINE OPE

--4-- --FIELD-- --OPE-- --VALUE-- --LINE OPE
--5-- --FIELD-- --OPE-- --VALUE-- --LINE OPE
--6-- --FIELD-- --OPE-- --VALUE-- --

OPE (List of authorized operators):
Less LessOrEqual Different Equal Greater GreaterOrEqual StartWith DontStartWith IsBetween FinishesWith DoesnotFinishWith IsNotBetween IsIn IsNotIn Contains DoesnotContain IsEmpty IsNotEmpty

Line OPE (Authorized operators):
And Or

FIELD: *Field existing in the store table (such as ET_ABREGE, ET_VILLE ...)*
VALUE: *Value of the store field (no control is performed on the values)*

- Creation of a trigger of type "Grouping"

➔Comment on the trigger (Optional)
➔ Identifier of the user restriction category (Optional)
➔ Details about the groupings (inclusion and/or exclusion):
  - The selection and exclusion lines must be filled in progressively: a line can only be filled in, if it is the first line or if the previous line is filled in.
  - The first line must be filled in.
  - If a grouping field is filled in, the value is mandatory.
  - The consistency of the values is not checked.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	12/14/2022	A2375		141520	#3.23	

➔ Improvements

The method is now set to status Beta

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
ADU	2/4/2025	A2508		352490	#3.387	

Update

➔ Objectives

- This method is used to update an existing store trigger of type "Fields", "List of stores", or "Grouping":

- You must fill in an existing Identifier for the trigger to be updated

- The following information can be updated.
  ➔Change of trigger description
  ➔Change of the scope of use

➔ Change the trigger setting details (change of the type and trigger settings)

- Change of the trigger settings
  ➔Update of trigger comment
  ➔ Update of the user restriction category identifier (Optional)
  ➔ Depending on the type of trigger type (List / Fields / Grouping) you want to update:

  - Update with a List of stores:
    =>the store list must exist and a blocking check is performed
  - Update with Fields (proceeds by canceling/replacing the entire field block):
    => The lines must be filled in progressively: a line can only be filled in if the first line or the previous line is filled in.
    - Exception in the case of line 4 which can only be filled in if the first line is filled in (and not line 3.)
    - A line is either empty or filled with the 3 pieces of information: Field / Field operator / Value.
    - If line 2, 3, 5 or 6 is filled in, the operator of the previous line must be specified.

  - Update with "Grouping" with inclusion and/or exclusion (proceeds by canceling/replacing the entire field block):
  - =>The selection and exclusion lines must be filled in progressively: A line can only be filled in if it is the first line or if the previous line is filled in.
    - The first line must be filled in.
    - If a grouping field is filled in, the value is mandatory.
    - The consistency of the values is not checked.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	12/14/2022	A2375		141520	#3.23	

➔ Improvements

The method is now set to status Beta

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
ADU	2/4/2025	A2508		352490	#3.387	

Evaluate

➔ Objectives

This method evaluates whether a customer meets the conditions of the trigger.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
PCH	11/30/2021	A2277		94604	#2.87	

5. StoresLists

➔ Improvements

The service is now set to the Released status

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
RLO	1/2/2023	A2427		151315	#3.53	

Create

➔ Objectives

Store lists can be used in several features of Cegid Retail Y2. Thus, sales conditions can be based on triggers using lists of stores.
This service is used to create a new list:

- ➔ Stores in the list can be entered by internal or external identifier of the store (external reference)
- ➔ The list must not exceed 100 occurrences.
  (Lists are loaded into memory and should not be large)
  A consistency and duplicate check in the list are performed.
- ➔ At the end of the registration, the number of stores in the list is returned.
- ➔ The Scopes property allows you to list the features that will be able to use it: Currently only the "Triggers" scope is available
- ➔ The restriction category limits the users who use it.
- ➔ The creation of the list is logged to the event log.

➔ Improvements

The maximum number of stores in a list is increased from 100 to 1,000.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
RLO	7/9/2024	1550987		276515	3.312	

GetListDetail

➔ Objectives

This method allows you to search for lists of available stores, according to the following search criteria:

- ➔ Ids: Collection of store lists to return
- ➔ Description: Description of the list

- Scope: Scope of use
- Restrictions: Identifier of the restriction category
- Fields: Filtering the requested information
- Scope of use
- Paging

GetDetail

➔ Objectives

This method allows you to view the details of a store list, according to the following search criteria:

- Id: Identifier of the store list
- Fields: Filtering returned information
  - System fields of the store list
  - Detailed content of the store list

Delete

➔ Objectives

This service is used to delete physically a list of stores from the database, using its unique identifier.
The removal of the list is recorded in the event log.
Please note:

- There is no control over the use of the list. You should make sure before deleting the list that it will not be used.
- This list can only be deleted by a user authorized by the restrictions.

6. SUBSIDIARIES

GetListDetail

➔ Objectives

This method allows you to search for lists of available subsidiaries, according to the following search criteria:

- ➔ Ids: Collection of the subsidiaries to return
- ➔ Fields: Filtering the requested information
  - SystemFields: To return the system fields updated by the server
  - Detail: To return additional information about the subsidiary
- ➔ Paging

➔ Improvements

Availability of this new service operation.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	1/31/2023	A2409		150676	#3.42	

The method is now set to the Released status

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
LDE	11/21/2023	A2478		202566	#3.227	

The method is now set to the Released status

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
ADU	7/30/2024	A2490		283537	#3.319	

GetDetail

➔ Objectives

This method allows you to view the detail of a subsidiary defined by its identifier:

- ➔ Id: Identifier of the subsidiary to be viewed.
- ➔ Fields: Filtering returned information
  - SystemFields: To return the system fields updated by the server
  - Detail: To return additional information about the subsidiary

➔ Improvements

Availability of this new service operation.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
AMO	1/31/2023	A2409		150676	#3:42	

The method is now set to the Released status

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
LDE	11/21/2023	A2478		202566	#3.227	

The method is now set to the Released status

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
ADU	7/30/2024	A2490		283537	#3.319	

7. STORES - USERDEFINEDTABLES

GetValue

➔ Objectives

This method allows you to find the label of a code in a store user-defined table (tables from 1 to 20):

- ➔ Id: The code for which the label is to be returned
- ➔ TableId: Index of the user-defined table from 1 to 20

➔ Improvements

Availability of this new service operation.

Dev	Date	CEGID's Ref.	Pb Ref.	PR	Plugin Build no.	Quality Ctrl
PLA	12/16/2024	1667505		333848	#3.370	

8. OTHER

Net Framework 4.8

Following Microsoft's announcement about the "end of support for .NET Framework 4.5.2, 4.6 and 4.6.1 as soon as April 26, 2022" the plugin now requires the installation of the .Net Framework 4.8 (runtime) on server components.

Deployment

Added installation kit for ReportService.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
EPL	9/22/2023	1239802		190607	#3.209	

Swagger

Rest/Restful APIs grouped by plugin, with the option of selecting them by plugin name.

Dev	Date	CEGID's Ref.	Pb Ref.	Pull request	Plugin Build no.	Quality Ctrl
ADU	1/13/2025	1543349		341742	#3.382	