Registration date: January 21, 2026

# Follow-up Notes

## Product Plugin V06

### Cegid Retail Y2 – Version 26

Make more possible

cegid

# Preamble

This plugin is a set of web services associated with one or more versions of Cegid Retail Y2.
This document describes its scope of implementation, as well as the changes and corrections made.
Please note: All plugin methods and services can be cited in this document. Only public methods for which the contract is published can be used by applications not designed by Cegid.

### Legal notices

Permission is granted under this Agreement to download documents held by Cegid and to use the information contained in the documents only internally, provided that: a) the copyright notice on the documents remains on all copies of the document; material; (b) the use of these documents for personal and non-commercial use unless it has been clearly defined by Cegid that certain specifications may be used for commercial purposes; (c) documents will not be copied to networked computers or published on any type of media unless expressly authorized by Cegid; and (d) no changes are made to these documents.

# Contents


Preamble 2

1. OBJECTIVES 5

Documentation 5

Y2 versions 6

2. ASSEMBLYBILLSOFMATERIALS 7

GetListDetail 7

GetDetail 8

3. BARCODE2DENGINE 9

Compute 9

4. BARCODE2DMANAGEMENT 10

GetDetail 10

GetListDetail 11

5. CATEGORIES 12

CreateOrUpdateValue 12

GetValues 12

GetValue 12

6. COLLECTIONS 13

CreateOrUpdateValue 13

GetValues 13

GetValue 13

7. FINANCIALITEMS 14

GetListDetail 14

GetDetail 16

8. IMAGE 18

Get 18

9. LINKEDITEMS 19

GetListDetail 19

GetDetail 20

10. LIST 21

Create 21

GetList 22

Delete 22

CloseAllItems 22
11. MACROBILLSOFMATERIALS 23
GetListDetail 23
GetDetail 24
12. MERCHANDISEITEMS 25
GetListDetail 25
GetDetail 26
13. REPORT 27
Download 27
EndGenerateLabels 27
GenerateLabels 28
GenerateScansListLabels 28
14. SCANSLISTS 30
Create 30
Delete 30
GetDetail 30
15. SEARCH 32
GetListDetail 32
16. STATISTICS 34
CreateOrUpdateValue 34
GetValues 34
GetValue 34
17. TRIGGERS 35
Create 35
GetListDetail 35
GetDetail 36
Update 36
Evaluate 36
EvaluateLists 36
18. OTHER 37
Net Framework 4.8 37
Deployment 37

# 1. Objectives

The objective of the **Product** plugin is to provide services relating to the management of items.
This service will be gradually enriched. This first version is used to manage the services allowing:

- ➔ Retrieving images from an item record.
- ➔ Management of item lists.

Reminder: Only public methods for which the contract is published can be used by applications not designed by Cegid. Cegid reserves the right to modify private services without ensuring backward compatibility, and without informing users.

# Documentation

The service contract documentation is visible on the IIS server(s) from the software package download page:

"Documentation" is a link that provides access to a documentation list:

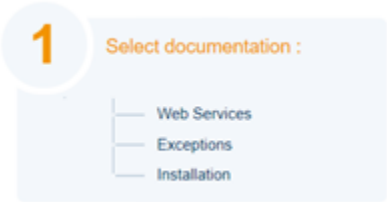


- ➔ **Web Services**
  The screen displayed provides access to the Web Services contracts and their properties
  Please note: the absence of a contract in the Web Services documentation screen means that the service is not installed or is not public.

- **Exceptions**
  This part provides access to exceptions, classified by type, and according to the plugin.

- **Installation**
  This page allows you to download Web Services installation and consumption documentation.

# Y2 versions

This plugin is compatible with the following version of Cegid Retail Y2:

- Version 26

Note:
The # sign at the beginning of the plugin build number corresponds to the major version of Cegid Retail Y2.

# 2. AssemblyBillsOfMaterials

## GetListDetail

### ➔ Objectives

This service allows you to search for Assembly-type BoM lists, based on the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Lines**: Returns BOM detail
  - **SystemFields**: Returns the system fields of the item record

The following rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account.

### ➔ Improvements

Code refactoring (Model), no impact on functionality

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/16/2024 | 1309475 | | 217582 | #4.343 | |

Added an input check for at least one and only one of the Ids and Barcodes criteria.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/19/2024 | 1281588 | | 218899 | #4.350 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# GetDetail

## ➔ Objectives

This service allows you to search for a bill of materials of type "Assembly" based on search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Lines**: Returns BOM detail
  - **SystemFields**: Returns the system fields of the item record

Particularity: the identifier entered in the criteria can be the internal code or the barcode of the financial item.
In the case of a barcode, the value entered must be prefixed by "EXT-".
Example with the - barcode "3000000436240": "EXT-3000000436240"

Apart from this particularity, all the rules of the GetListDetail method are applied.

## ➔ Improvements

Code refactoring (Model), no impact on functionality

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/16/2024 | 1309475 | | 217582 | #4.343 | |

The  method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# 3. BARCODE2DENGINE

## Compute

### ➔ Objectives

This service calculates the 2D barcode for an item list based on a 2D barcode type The search criteria for items are based on their identifier or barcode. You can indicate a serial number per item (useful if it is contained in the 2D barcode)

The following rules are applied:

- ➔ An exception is raised if the barcode type identifier does not exist.
- ➔ An item identifier must be specified: Its identifier or barcode
- ➔ In the case of an item that does not exist or does not belong to the user's sales divisions (query), no exception is raised, the item is simply not returned in the reply.
- ➔ The barcode is calculated by concatenating each of the information pieces available in the barcode definition:
  - Fields left-framed and formatted to the length specified in the settings with special characters, quotation marks and double quotes removed
  - Application of the specific format if specified; otherwise, the decimal separator is a comma, and the date format is the default culture of the server
  - The serial number is the one indicated in the request
  - The prefix is added in 1st position if it is specified
- ➔ The information returned contains the 2D barcode, the item identifier (ID and barcode) and the serial number. All this is sorted by item ID and serial number.

### ➔ Improvements

Implementation of the method

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/26/2024 | A2496 | | 302744 | #4.526 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# 4. BARCODE2DMANAGEMENT

## GetDetail

### ➔ Objectives

This service allows you to search for the settings of 2D-barcode type based on the following search criteria:

- ➔ Identifier 2D-barcode type
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **BarcodeElements** Returns the components of the 2D-barcode type
  - **SystemFields** Returns the system fields of the item record

The following rules are applied:

- ➔ An exception is raised if the barcode type identifier does not exist.
- ➔ The "SystemFields" and "BarcodeElements" sections are present in the reply only if they have been requested in the Fields field.
- ➔ The properties defining the content are returned sorted in order of priority.
- ➔ The SpecificFormat section is present in the reply only if the M2L_FMTSPECIAL field of the database is checked. In this case, optional properties are populated according to field type:

| | Boolean | Date | Double | Other |
|---|---|---|---|---|
| DecimalSeparator | | | X | |
| DecimalNumber | | | X | |
| DateFormat | | X | | |
| BooleanFormat | X | | | |

- ➔ The ConstantValue property is only present in the reply for a constant-type field.
- ➔ The names of the fields defining the 2D-barcode structure are not directly displayed in the reply, but only the name of the property corresponding to the field.

### ➔ Improvements

Implementation of the method

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/9/2024 | A2496 | | 296170 | #4.499 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# GetListDetail

## ➔ Objectives

This service allows you to search for the settings of 2D-barcode types based on the following search criteria:

- ➔ List of Identifiers of 2D-barcode types
- ➔ Its description: A 2D-barcode type is returned if its label contains the requested description.
- ➔ Its prefix: A 2D-barcode type is returned if its prefix contains the requested prefix.
- ➔ Its length
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
    - **BarcodeElements** Returns the components of the 2D-barcode type
    - **SystemFields** Returns the system fields of the item record

The following rules are applied:

- ➔ 2D-barcode types are returned sorted by Id
- ➔ No exception is raised if one or more non-existent Ids are called. Non-existent Ids passed in the request are not present in the reply.
- ➔ An empty list is returned if no barcode type matches the criteria.
- ➔ The rules for formatting the reply are defined in the GetDetail method (see above), and are applied to each barcode type returned.
- ➔ A paging mechanism is implemented. If no information is provided, only the first 20 barcode types matching the criteria are returned.

## ➔ Improvements

Implementation of the method

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/9/2024 | A2496 | | 296170 | #4.499 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# 5. CATEGORIES

The CATEGORIES service allows the creation, modification and query of item categories. Deletion is authorized from the Cegid Retail Y2 menu provided that the category is not used.

## CreateOrUpdateValue

### ➔ Objectives

This method is used either to add a new category, or to modify an existing category in Cegid Retail Y2.
The following business rules are applied:

- ➔ The number of the category in which you create or modify a value must be a number between 1 and 8.
- ➔ The name of the category is mandatory.
- ➔ The short name of the category is mandatory.
- ➔ The update does not take into account the translation, the wording must be in the original language of the folder. If the wording changes, the user will have to modify the translations.

The creation or modification of an item category is traced in the event log.

## GetValues

### ➔ Objectives

This method is used to view the different values of an item category.

### ➔ Improvements

Use of PGI_LOOKUP rather than a direct Select on CHOIXCOD to benefit from on-the-fly translation of level category descriptions.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| PLA | 4/29/2024 | 1452607 | | 253728 | #4.429 | |

## GetValue

### ➔ Objectives

This method returns the description and the short description for a value of an item category.

# 6. COLLECTIONS

The COLLECTIONS service allows the creation, modification and query of item collections. Deletion is authorized from the Cegid Retail Y2 menu provided that the collection is not used.

## CreateOrUpdateValue

### ➔ Objectives

This method is used either to add a new collection, or to modify an existing collection in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The description of the collection is mandatory.
- ➔ The short description of the collection is mandatory.
- ➔ The update does not take into account the translation, the wording must be in the original language of the folder. If the wording changes, the user will have to modify the translations.

The creation or modification of an item collection is traced in the event log.

## GetValues

### ➔ Objectives

This method is used to view the different values of an item collection.

## GetValue

### ➔ Objectives

This method returns the description and the short description for a value of an item collection.

# 7. FINANCIALITEMS

## GetListDetail

### ➔ Objectives

This service allows you to search for lists of financial items, according to the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Informations**: Returns information from item record
  - **SystemFields**: Returns the system fields of the item record
  - **UserDefinedFields**: Returns the system fields of the item record

The following business rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account.

Note: Recovery of the item properties used in the sales conditions, to study their presence according to the type of the item.

The provision of the various properties of the "Informations" tag depends on the financial item type (if no property is defined for the item type, the tag is not present).

Here is a table specifying, based on the type of the financial item processed, the properties that are present:

| Financial item type | Amount sent to the EPT | Discount reason | Maximum discount percentage | Store trigger | Item trigger | Combinable |
|---|---|---|---|---|---|---|
| Acquisition of gift certificate | X | X | | X | | X |
| Acquisition of gift card | X | X | | | | |
| Acquisition loyalty gift certificate | | | X | X | X | X |
| Acquisition of sales condition gift certificate | X | | X | X | X | X |
| Deposit reimbursement | X | | | | | |
| Credit note reimbursement | X | | | | | |
| Gift certificate reimbursement | X | | | | | |
| Gift card reimbursement | X | | | | | |
| Deposit payment | X | | | | | |

## ➔ Improvements

The  method is now set to the Released status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

The method no longer returns the markdown reason for a financial item that can be used as a payment method.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| EPL | 1/2/2024 | 1354137 | | 213852 | #4.335 | |

Added the following information:
In Informations: Type of credit request, Authorization request from a payment service provider, Use with other items and Associated payment method.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 3/11/2024 | 1390441 | | 236127 | #4.403 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

Added the following properties to the reply in the Information tag:

Condition on amounts (ConditionsOnAmounts):

Minimum amount (MinAmount)

Maximum amount (MaxAmount)

Maximum discount (%) when purchasing a gift certificate or gift card (MaxDiscount)

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| RLO | 12/17/2024 | 1646232 | | 332496 | #5.99 | |

Added the 'Allocation of voucher number method' property to the Informations tag, in the event of acquisition for financial item types:

- Acquisition of a gift card
- Acquisition of a gift certificate
- Acquisition of a sales condition gift certificate
- Acquisition of a loyalty gift certificate
- Deposit payment

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 3/7/2025 | 1692862 | | 366167 | #5.135 | |

# GetDetail

## ➔ Objectives

This service allows you to search one financial items according to the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Informations**: Returns information from item record
  - **SystemFields**: Returns the system fields of the item record
  - **UserDefinedFields**: Returns the system fields of the item record

Particularity: the identifier entered in the criteria can be the internal code or the barcode of the financial item.
In the case of a barcode, the value entered must be prefixed by "EXT-".
Example with the - barcode "3000000436240": "EXT-3000000436240"

Apart from this particularity, all the rules of the GetListDetail method are applied.

## ➔ Improvements

The  method is now set to the Released status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

The method no longer returns the markdown reason for a financial item that can be used as a payment method.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| EPL | 1/2/2024 | 1354137 | | 213852 | #4.335 | |

Added the following information:
In "Informations": Type of credit request, Authorization request from a payment service provider, Use with other items and Associated payment method.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 3/11/2024 | 1390441 | | 236127 | #4.403 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

Added the following properties to the reply in the "Informations" tag:

Condition on amounts (ConditionsOnAmounts):

Minimum amount (MinAmount)

Maximum amount (MaxAmount)
Maximum discount (%) when purchasing a gift certificate or gift card (MaxDiscount)

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| RLO | 12/17/2024 | 1646232 | | 332496 | #5.99 | |

Added the 'Allocation of voucher number method' property to the "Informations" tag, in the event of acquisition for financial item types:

- Acquisition of a gift card
- Acquisition of a gift certificate
- Acquisition of a sales condition gift certificate
- Acquisition of a loyalty gift certificate
- Deposit payment

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 3/7/2025 | 1692862 | | 366167 | #5.135 | |

# 8. IMAGE

## Get

### ➔ Objectives

This method allows you to retrieve the image of an item stored in Cegid Retail Y2.
An item can have several images, the UseType property allows you to specify the "use of the image":

- ➔ The first image for this use is sent in the case where several images are present for the same use (lowest rank).
  If there is no image for the requested use, no image is returned.
- ➔ If no use is specified, the first image of the item is sent.

If the item has dimensions, the image of the dimensioned item is returned. If missing, it is up to the caller to call back the service with the generic item.

# 9. LINKEDITEMS

## GetListDetail

### ➔ Objectives

This service allows you to search for the list of linked items in a collection of merchandise or bill of materials items, along with their usage criteria.
The search is based on the following search criteria:

- ➔ Item identifier
- ➔ Item barcode
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **ApplicationCriteria** : Returns application criteria.
  - **SystemFields**: Returns system fields.

The following rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account.
- ➔ If an item exists but has no linked items, it is not included in the reply.
- ➔ List of usage stores: only one of the "Identifiers" or "Grouping" properties is returned in the reply.

### ➔ Improvements

The  method is now set to the Released status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

Added an input check for at least one and only one of the Ids and Barcodes criteria.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/19/2024 | 1281588 | | 218899 | #4.350 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# GetDetail

## ➔ Objectives

This service allows you to search for the list of linked items for merchandise or bill of materials item, along with their usage criteria.

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **ApplicationCriteria** : Returns application criteria.
  - **SystemFields**: Returns the system fields of the item record

Particularity: the identifier entered in the criteria can be the internal code or the barcode of the item.
In the case of a barcode, the value entered must be prefixed by "EXT-".
Example with the - barcode "3000000436240": "EXT-3000000436240"

Apart from this particularity, all the rules of the GetListDetail method are applied.

## ➔ Improvements

The  method is now set to the Released status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# 10. LIST

## Create

### ➔ Objectives

Item lists can be used in several Cegid Retail Y2 features: gift lists for sales conditions, triggers, inventories, etc.
This service allows you to create a new list, with the following characteristics:

- ➔ The integrated items are not closed, and do not have duplicates.
- ➔ The list must not exceed 100 hits:
  - Lists are loaded into memory and should not be large.
  - The selection of items in a list is not intended to handle hundreds of items.
- ➔ The following items can be integrated:
  - Service item
  - Bills of materials of type assortment or assembly
  - Single item
  - Dimensioned item (SKU)
  - Generic item, allowing to take into account all dimensions
  - Generic item with one dimension filled in, allowing all other dimensions to be taken into account.
- ➔ At the end of the recording, the counters are calculated and returned: number of lines and number of SKUs in the list.
- ➔ The Scopes property lists the features that can use it.
- ➔ The restriction category limits the users who use it.
- ➔ The creation of the list is recorded in the event log.
- ➔ Options in sales conditions must be specified, if the "Sales conditions" scope is defined. These options must not be filled in, if this scope is missing.
- ➔ The line values are between 0, then 0.0001 up to 999,999,999.99

The creation of the list is recorded in the event log.

### ➔ Improvements

The maximum number of items in a list is increased from 100 to 1,000.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| RLO | 7/10/2024 | 1553926 | | 277309 | 4.455 | |

# GetList

## ➔ Objectives

This service allows you to search for lists, based on search criteria:

- ➔ List description
- ➔ Restriction category
- ➔ Scope of the list

# Delete

## ➔ Objectives

This service is used to delete a list physically from the database.
The removal of the list is recorded in the event log.
Please note:

- ➔ There is no control over the use of the list. You should make sure before deleting the list that it will not be used.
- ➔ This list can only be deleted by a user authorized by the restrictions.

# CloseAllItems

## ➔ Objectives

This service allows you to close all the items in the list.
This action on the list is recorded in the event log.

# 11. MACROBILLSOFMATERIALS

## GetListDetail

### ➔ Objectives

This service allows you to search for Macro-type BoM lists, based on the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Lines**: Returns BOM detail
  - **SystemFields**: Returns the system fields of the item record

The following rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account

### ➔ Improvements

Optimization of the BoM search request.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| EPL | 9/18/2023 | 1237299 | | 189647 | #4.283 | |

The  method is now set to the Beta status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

Code refactoring (Model), no impact on functionality

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/16/2024 | 1309475 | | 217582 | #4.343 | |

Added an input check for at least one and only one of the Ids and Barcodes criteria.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/19/2024 | 1281588 | | 218899 | #4.350 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# GetDetail

## ➔ Objectives

This service allows you to search for a bill of materials of type "Macro" based on search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Lines**: Returns BOM detail
  - **SystemFields**: Returns the system fields of the item record

Particularity: the identifier entered in the criteria can be the internal code or the barcode of the financial item.
In the case of a barcode, the value entered must be prefixed by "EXT-".
Example with the - barcode "3000000436240": "EXT-3000000436240"

Apart from this particularity, all the rules of the GetListDetail method are applied.

## ➔ Improvements

The method is now set to the Beta status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

Code refactoring (Model), no impact on functionality

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/16/2024 | 1309475 | | 217582 | #4.343 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# 12. MERCHANDISEITEMS

## GetListDetail

### ➔ Objectives

This service allows you to search for merchandise lists, based on the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Characteristics**: Returns information from item record
  - **SystemFields**: Returns the system fields of the item record
  - **UserDefinedFields**: Returns the system fields of the item record
  - **UserFields**: Returns user fields

The following business rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account.

- ➔ Dimension management:
  - Section "Dimensions" is missing for single items.
  - Dimension mask is present for generic and dimensioned items.
  - Dimension details are present only for dimensioned items.

- ➔ User-defined information: all user-defined tables are systematically returned in the reply (empty or filled in) as soon as they have been requested.

- ➔ User fields:

  - Only user fields defined for the item are returned.
  - An empty list is returned, if no user fields have been defined for the item.
  - User fields are defined at the single or generic article level.
  - The "UserFields" tag is missing for a dimensioned item.

### ➔ Improvements

The method is now set to the Beta status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

Added an input check for at least one and only one of the Ids and Barcodes criteria.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/19/2024 | 1281588 | | 218899 | #4.350 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# GetDetail

## ➔ Objectives

This service allows you to search one financial items according to the following search criteria:

- ➔ Item identifier
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Informations**: Returns information from item record
  - **SystemFields**: Returns the system fields of the item record
  - **UserDefinedFields**: Returns the system fields of the item record

Particularity: the identifier entered in the criteria can be the internal code or the barcode of the financial item.
In the case of a barcode, the value entered must be prefixed by "EXT-".
Example with the - barcode "3000000436240": "EXT-3000000436240"

Apart from this particularity, all the rules of the GetListDetail method are applied.

## ➔ Improvements

The  method is now set to the Released status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# 13. REPORT

The REPORT service allows the management of reports related to items.

## Download

### ➔ Objectives

This method downloads the PDF file that was generated by one of the Generate methods below.
The following business rules are applied:

- ➔ The identifier of the file to be downloaded must exist.

In response, a link will allow you to download the PDF document to your computer.

### ➔ Improvements

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

## EndGenerateLabels

### ➔ Objectives

This method allows you to check the progress of a label printing request in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The process ID must exist

If the EventLog section is populated, the event log identifier will update it to indicate that printing is complete if it is.

In response, the Report section is populated only if the PDF was successfully generated. The identifier of the generated file allows you to download it via the Download method

### ➔ Improvements

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# GenerateLabels

## ➔ Objectives

This method is used to initiate a request to generate PDF file for labels of an item list in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ At least one item must be provided in the Items list
- ➔ If the reprint request is requested and the reprint reason is entered, it must exist
- ➔ The reason for reprint must only be entered when reprinting.

- ➔ The printing template, language, and the store must exist.

In reply, the information indicates the progress of the PDF generation request.

- ➔ The JobId is returned only if the generation could not be finalized within the requested time (WaitTimeOut in request). This JobId is used to call the EndGenerateLabels method, which indicates the status of the generation.
- ➔ The Report section is populated only if PDF generation was successful. The identifier of the generated file allows you to download it via the Download method
- ➔ The EventLog section is populated if the event log is updated, i.e., if a reprint is made.

## ➔ Improvements

Corrected the exception that occurred if the price search date was not passed in.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| HDA | 1/14/2025 | A2497 - 1687624 | | 344461 | #5.115 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# GenerateScansListLabels

## ➔ Objectives

This method is used to initiate a request to generate PDF file for labels of a scan list in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The scan list must exist

- ➔ The printing template, language, and the store must exist.

In reply, the information indicates the progress of the PDF generation request.

- ➔ The JobId is returned only if the generation could not be finalized within the requested time (WaitTimeOut in request). This JobId is used to call the EndGenerateLabels method, which indicates the status of the generation.
- ➔ The Report section is populated only if PDF generation was successful. The identifier of the generated file allows you to download it via the Download method

## ➔ Improvements

Corrected the exception that occurred if the price search date was not passed in.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| HDA | 1/14/2025 | A2497 - 1687624 | | 344461 | #5.115 | |

The method is now set to status Beta

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 2/4/2025 | A2508 | | 352551 | #5.122 | |

# 14. SCANSLISTS

The SCANLISTS service handles the creation, deletion and query of a list of item scans.

## Create

### ➔ Objectives

This method is used to add a new list to scan in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The scan list identifier is a Guid.
- ➔ The description of the scan list is mandatory.
- ➔ The device that entered the scan list is mandatory.
- ➔ The store where the scan list was entered is mandatory and must be authorized for the user.
- ➔ To identify an item in the scan list of scans, you can use its identifier or its barcode. You can enter both but they must be consistent.

### ➔ Improvements

Added the possibility of entering quantities with decimals.
Note: 4 decimal places maximum (maximum managed by Y2)

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 7/20/2023 | 1207647 | | 180618 | #4.167 | |

Added a check on the quantity that must be 1 for items with a given serial number.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/20/2023 | 1208585 | | 202536 | #4.319 | |

## Delete

### ➔ Objectives

This method is used to delete a list to scan in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The scan list identifier is a Guid and mandatory.
- ➔ The store of the scan list must be authorized for the user.

## GetDetail

### ➔ Objectives

This method is used to view a scan list.
The store of the scan list must be authorized for the user.

## ➔ Improvements

Added the possibility of returning quantities with decimals.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 7/20/2023 | 1207647 | | 180618 | #4.167 | |

# 15. SEARCH

## GetListDetail

### ➔ Operation

This service allows you to search for item lists, based on the following search criteria:

- ➔ Item identifier
- ➔ Item barcode
- ➔ Fields tag to filter the information to be returned (Many – Enum – Optional)
  - **Informations**: Returns information from item record
  - **SystemFields**: Returns the system fields of the item record
  - **UserDefinedFields**: Returns the system fields of the item record
  - **UserFields**: Returns the user fields of the item record

The following business rules are applied:

- ➔ Items are returned sorted by ID
- ➔ Searches are performed either by the internal code or by the barcode. It is not allowed to use both lists.
- ➔ The search is performed on the exact value transmitted
- ➔ User restrictions (via the sales divisions) are taken into account.

Note: Recovery of the item properties used in the sales conditions, to study their presence according to the type of the item.

Note: neutralization of the "Item groups" and "Gross unit price", specific to the shopping cart:

| Criteria/Item type | Number | Merchandise | Financial | Service | Macro BOM | Assembly BOM | Assortment BOM |
|---|---|---|---|---|---|---|---|
| **Item code** | | Yes | Yes | Yes | Yes | Yes | Yes |
| **Categories/Sub-categories** | 1..8 | Yes | NO | Yes | Yes | Yes | Yes |
| **Collection** | | Yes | NO | Yes | Yes | Yes | Yes |
| **Statistics** | 1. 2 | Yes | NO | Yes | Yes | Yes | Yes |
| **User-defined tables** | 1..15 | Yes | Yes | Yes | NO | Yes | Yes |
| **User fields** | X | Yes | NO | NO | Yes | Yes | Yes |
| **User-defined texts** | 1..3 | Yes | Yes | Yes | NO | Yes | Yes |

### ➔ Improvements

The  method is now set to the Beta status

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 11/21/2023 | A2478 | | 203241 | #4.325 | |

Added an input check for at least one and only one of the Ids and Barcodes criteria.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/19/2024 | 1281588 | | 218899 | #4.350 | |

Added optimization to search for UserFields only if they are requested in response to the call via the 'Fields' tag.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 7/29/2024 | 1371504 | | 283280 | #4.460 | |

The method is now set to status Released

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 9/27/2024 | 1565857 | | 303838 | #4.529 | |

# 16. STATISTICS

The STATISTICS service allows the creation, modification and query of item statistics 1 and 2. Deletion is authorized from the Cegid Retail Y2 menu provided that the statistics are not used.

## CreateOrUpdateValue

### ➔ Objectives

This method is used either to add new statistics, or to modify existing statistics in *Cegid Retail Y2*.
The following business rules are applied:

- ➔ The description of the statistic is mandatory.
- ➔ The short description of the statistic is mandatory.
- ➔ The update does not take into account the translation, the wording must be in the original language of the folder. If the wording changes, the user will have to modify the translations.

The creation or modification of item statistics is traced in the event log.

## GetValues

### ➔ Objectives

This method is used to view the different values of an item statistic.

### ➔ Improvements

Use of PGI_LOOKUP rather than a direct Select on CHOIXCOD to benefit from on-the-fly translation of the descriptions for item user-defined statistics.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| PLA | 4/29/2024 | 1452607 | | 253728 | #4.429 | |

## GetValue

### ➔ Objectives

This method returns the description and the short description for a value of an item statistics.

# 17. TRIGGERS

## Create

### ➔ Objectives

Modules such as loyalty, sales conditions, entry of user-defined tables, and payment methods use filters based on items.
For example: Applying a sales condition only on items of category 1 "F01" and user-defined table 3 "T01".
Triggers are created with this objective in mind, making it possible to set filters that depend on the value of certain fields.

**Business rules**
The following business rules are applied:

- ➔ The trigger type includes a single choice among those 3 (mandatory):
  - Fields (TriggerFields = True)
  - Item list (TriggerItemList = True)
  - Groupings (TriggerGroupingField = True)
- ➔ For the trigger type "Fields":
  - Lines must be filled in progressively: a line can only be filled in if it is the first line or if the previous line is filled in.
  - Exception in the case of line 4 which can only be filled in if the first line is filled in (and not line 3.)
  - A line is either empty or filled with the 3 pieces of information: Field / Field operator / Value.
  - If line 2, 3, 5 or 6 is filled in, the operator of the previous line must be specified.
- ➔ For the trigger type "Item List":
  - The list of items is mandatory but is not checked. If there is no list, the trigger will not work.
- ➔ For the trigger type "Grouping":
  - The selection and exclusion lines must be filled in progressively: a line can only be filled in, if it is the first line or if the previous line is filled in.
  - The first line must be filled in.
  - If a grouping field is filled in, the value is mandatory.
  - The consistency of the values is not checked.
- ➔ The user provides the filtering by the user restriction.
- ➔ The restriction category used must include the "Trigger" scope.

## GetListDetail

### ➔ Objectives

The following business rules are applied:

- ➔ The user provides the filtering by the user restriction.
- ➔ If the scope of use is not specified, no filter will be applied to the scope.

➔ The description is not mandatory; if there is one, a “LIKE” will be performed.

# GetDetail

## ➔ Objectives

The *GetListDetail* method are applied.

# Update

## ➔ Objectives

The rules of the *Create* method are applied.

# Evaluate

## ➔ Objectives

This method evaluates whether an item meets the conditions of the trigger.

# EvaluateLists

## ➔ Objectives

This method is meant to assess a list of triggers with a list of items. In return, we get a list of triggers and the items being part of it.

## ➔ Improvements

The method is now set to the Released status

| Dev | Date | CEGID’s Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| LDE | 7/12/2023 | A2452 | | 179136 | #4.159 | |

# 18. OTHER

## Net Framework 4.8

Following Microsoft's announcement about the "end of support for .NET Framework 4.5.2, 4.6 and 4.6.1 as soon as April 26, 2022" the plugin now requires the installation of the .Net Framework 4.8 (runtime) on server components.

## Deployment

Added installation kit for ReportService.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| EPL | 9/22/2023 | 1239802 | | 190638 | #4.291 | |

## Swagger

Rest/Restful APIs grouped by plugin, with the option of selecting them by plugin name.

| Dev | Date | CEGID's Ref. | Pb Ref. | Pull request | Plugin Build no. | Quality Ctrl |
|---|---|---|---|---|---|---|
| ADU | 1/14/2025 | 1543349 | | 342906 | #5.113 | |