## **ONLINE CHARITY SYSTEM**

## PROJECT REPORT

Submitted in fulfilment for the J-Component of CSE3002 – Internet and Web Programming

## **CAL COURSE**

in

**B.Tech.** (Computer Science)

by

ANURAG PANDEY (19BCE0345) TANISHQ SHAH (19BCE2067) VANSH AGGARWAL (19BCE0987)

Under the guidance of

Prof. Jayakumar Sadhasivam SCOPE



# SCHOOL OF COMPUTER SCIENCE AND ENGINEERING

Fall Semester 2021-2022

## **TABLE OF CONTENTS**

| CHAPTER NO. | TITLE                   | PAGE NO. |  |  |  |  |
|-------------|-------------------------|----------|--|--|--|--|
| 1.          | Abstract                | 2        |  |  |  |  |
| 2.          | Introduction            | 3        |  |  |  |  |
| 3.          | 3. Problem Statement    |          |  |  |  |  |
| 4.          | 4. Process Flow Diagram |          |  |  |  |  |
| 5.          | Modules                 | 6        |  |  |  |  |
| 6.          | ER Diagram              | 7        |  |  |  |  |
| 7.          | Database Design         | 8        |  |  |  |  |
| 8.          | Conclusion              | 9        |  |  |  |  |
| 9.          | References              | 10       |  |  |  |  |
| 10.         | Snapshots               | 11       |  |  |  |  |
| 11.         | Source Code             | 12       |  |  |  |  |

## **ABSTRACT:**

Charity is an act of kindness, where a person who has financially more than enough of what he or she needs contributes a part of his or her surplus income for the fulfilment of the needs of those who are less capable. The majority of NGOs have experienced difficulties in getting funds or other required things. Getting a donor is a very hard task, and sometimes dealing with some donor's conditions can be a big challenge for NGOs to fulfil. Donors too want to donate but due to diverse ranges of NGOs they might get overwhelmed. Also in this busy life, they barely have time for lengthy processes for donating to a charity.

## **INTRODUCTION:**

### 1.1 Background

Charity is an act of kindness, where a person who has financially more than enough of what he or she needs contributes a part of his or her surplus income for the fulfilment of the needs of those who are less capable. The majority of NGOs have experienced difficulties in getting funds or other required things. Getting a donor is a very hard task, and sometimes dealing with some donor's conditions can be a big challenge for NGOs to fulfil. Donors too want to donate but due to diverse ranges of NGOs they might get overwhelmed. Also in this busy life, they barely have time for lengthy processes for donating to a charity.

## 1.2 Objective of the Project

This project provides a website to organize many Charity and fund-raising events. Through this anyone can raise a charity with proper details and anyone can donate to various causes. This website can be used for large Associations like Red-cross or small associations like NGOs in VIT. Our Aim is providing a platform for many kind people to help those in need and those in need to get help. Hence this not only contributes to the society but also enables people to help many others in today's busy world.

## **PROBLEM STATEMENT:**

In the recent times, the charity organization has been growing at a great pace with its peculiar challenges just like any other industry. The main problems faced by charity organizations as identified are as follows:

- i. Donors manually book appointments, and the owners of these firms write down same appointments in diary and forget most of them due to the high number of donors.
- ii. Overwhelming calls from donors who only wish to know more about the services and not necessarily book an appointment.
- iii. Although, most of these charity organizations have attracted a good number of donors and NGOs, they are yet to achieve the desired number of individuals/donors as originally planned.

Therefore, the aim of this project is to mainly resolve these problems by designing a web-based system to the charity management systems in the charity organizations that includes the following features by just one click on a link:

- i. A brief introduction to the charity organization and a small profile about the organization owners and volunteers
- ii. A page that includes all the services offered by the organization.
- iii. Contact details.
- iv. Brief introduction to the charity funding
- v. The donors should be able to carry out due diligence of the organizations via the web

## PROCESS FLOW DIAGRAM:

|    | Task                                 | Assigned To | Start    | End      | Dur | % | 2021 |     |     |     |
|----|--------------------------------------|-------------|----------|----------|-----|---|------|-----|-----|-----|
|    |                                      |             |          |          |     |   | Aug  | Sep | Oct | Nov |
|    | ONLINE CHARITY SYSTEM                |             | 21/8/21  | 20/11/21 | 63  |   |      |     |     |     |
| 1  | REQUIREMENT AND<br>ANALYSIS          |             | 21/8/21  | 26/8/21  | 4   |   |      |     |     |     |
| 2  | ABSTRACT AND SCOPE                   |             | 21/8/21  | 23/8/21  | 1   |   |      |     |     |     |
| 3  | DETERMINING OBJECTIVE OF PROJECT     |             | 22/8/21  | 23/8/21  | 1   |   |      |     |     |     |
| 4  | FINISH ANALYSIS                      |             | 23/8/21  | 24/8/21  | 2   |   |      |     |     |     |
| 5  | DESIGN                               |             | 25/8/21  | 29/8/21  | 3   |   |      |     |     |     |
| 6  | Designing user interface             |             | 25/8/21  | 26/8/21  | 2   |   |      |     |     |     |
| 7  | UX design                            |             | 26/8/21  | 29/8/21  | 2   |   |      |     |     |     |
| 8  | DEVELOPMENT                          |             | 31/8/21  | 20/11/21 | 57  |   |      |     |     |     |
| 9  | FRONT END DEVELOPMENT                |             | 31/8/21  | 18/9/21  | 14  |   |      |     |     |     |
| 10 | HTML                                 |             | 31/8/21  | 8/9/21   | 7   |   |      |     |     |     |
| 11 | CSS                                  |             | 8/9/21   | 18/9/21  | 8   |   |      |     |     |     |
| 12 | ADDING JQUERY AND<br>JAVASCRIPT      |             | 18/9/21  | 23/9/21  | 4   |   |      |     |     |     |
| 13 | FORM VALIDATION                      |             | 18/9/21  | 21/9/21  | 2   |   |      |     |     |     |
| 14 | ADDING MORE FUNCTION                 |             | 21/9/21  | 23/9/21  | 3   |   |      |     |     |     |
| 15 | BACKEND DEVELOPMENT                  |             | 24/9/21  | 30/9/21  | 5   |   |      |     |     |     |
| 16 | FORMING DATABASE IN SQL              |             | 24/9/21  | 26/9/21  | 1   |   |      |     |     |     |
| 17 | CREATING TABLE                       |             | 26/9/21  | 30/9/21  | 4   |   |      |     |     |     |
| 18 | BACK END INTEGRATION                 |             | 30/9/21  | 5/11/21  | 26  |   |      |     |     |     |
| 19 | PHP                                  |             | 30/9/21  | 18/10/21 | 12  |   |      |     |     |     |
| 20 | CONNECT WITH FRONT END               |             | 18/10/21 | 25/10/21 | 6   |   |      |     |     |     |
| 21 | MAKING FINAL DEVELOPMENT<br>CHANGES  |             | 25/10/21 | 5/11/21  | 10  |   |      |     |     |     |
| 22 | TESTING                              |             | 6/11/21  | 16/11/21 | 6   |   |      |     |     |     |
| 23 | PERFORMANCE ENVIRONMNETAL            |             | 6/11/21  | 10/11/21 | 3   |   |      |     |     |     |
| 24 | CORRECTIN ISSUE                      |             | 10/11/21 | 13/11/21 | 2   |   |      |     |     |     |
| 25 | FINAL TESTING AFTER RESOLVING ISSUES |             | 13/11/21 | 16/11/21 | 2   |   |      |     |     |     |

## **MODULES:**

This charity management system has three modules namely, Admin, NGO and Donor.

## **Administrators Detailed Attribute**

- Admin can login using credentials and manage the request raised by the NGO by rejecting it.
- Admin can just reject/delete the NGO if he is not satisfied with it and those charities will not appear to users for donation.
- Admin will get the report of NGOs who get donations.
- Admin can login into the system using fixed credentials.


## Ngo View

- NGOs (a user) can register and login on the system using valid credentials.
- NGOs can raise requests for any cause in need by filling a form consisting of some details like the name, purpose and a cover picture. They can view the previous charities list and donation report.
- It is important to know that the NGO module here is user only but for differentiating the functionality we are stating them as NGOs (but they can be donors as well).

## **Donors View**

- Donors (also a user) can simply register and login using credentials.
- Donors can view the different charities list and can donate to them by filling a donation form with some details.
- They can see their donation history and will have an option to edit some details they want and also delete a record.

## **ER-DIAGRAM:**

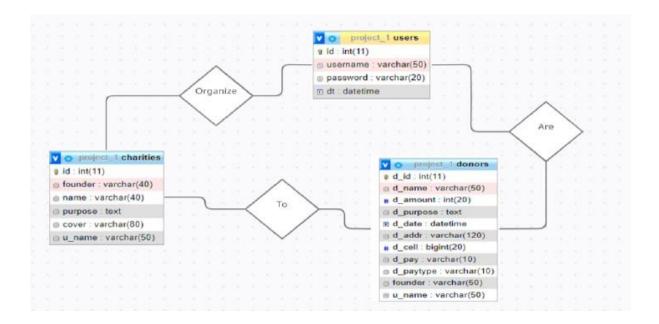

## **DATABASE DESIGN:**

MySQL database is used to save software data for this project. MySQL is relational database management, and it is free of charge. All of the information is kept in a select- editable, and every table has particular range columns and rows. It has 3 tables named as charities, donors, users.

### **Database Structure**




#### **Database Constraints**


- The id of users, charity id & d\_id of donors is declared as Primary Key and auto increment constraint is applied to avoid any fraud entry in database.
- The dt in table users is timestamp that shows the user registration date.
- The ddate in donors table is a timestamp that show the date of donation


#### **Database Table Field**

#### **USERS**

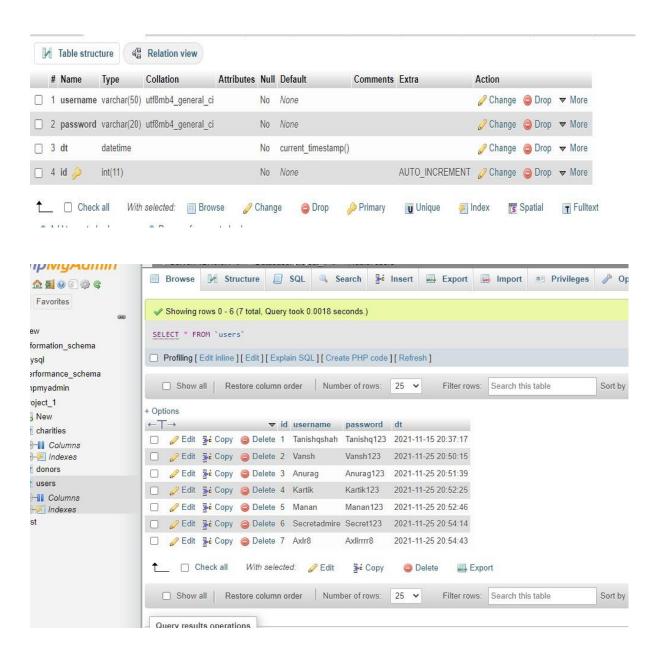


#### **Donors**

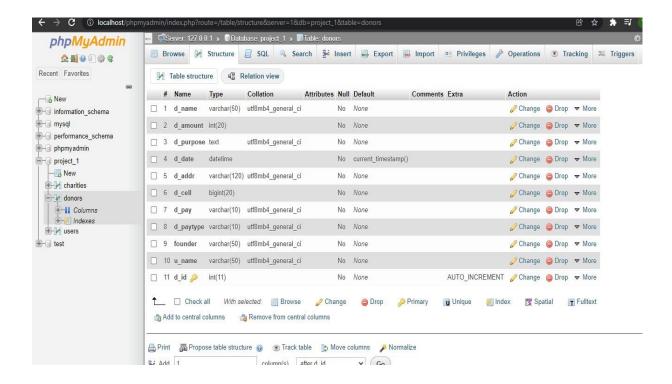

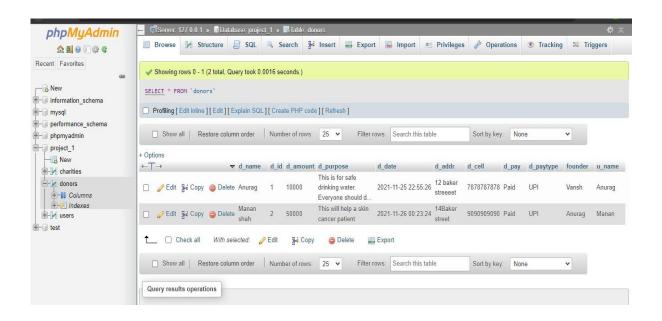

## **Charities**

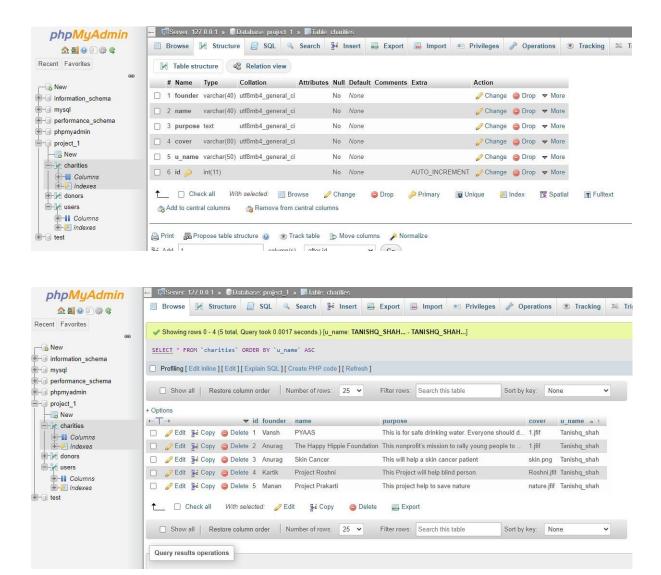

## **CONCLUSION:**

Charity is an act of kindness, where a person who has financially more than enough of what he or she needs contributes a part of his or her surplus income for the fulfilment of the needs of those who are less capable. The majority of NGOs have experienced difficulties in getting funds or other required things. Getting a donor is a very hard task, and sometimes dealing with some donor's conditions can be a big challenge for NGOs to fulfil. This charity management system will help NGOs to find donors easily. The website is developed with an administrative and a non-administrative section. Only authenticated administrative members can access the administrative area. The system provides features that facilitate users with no webprogramming knowledge to manage web contents without any dependency on webmasters. Administrators can add, manage web contents of the main user website. The non-administrative part is for the general public (NGOs and Donors) where the users can register/login, raise charities and can donate to the charities of their own interests

In conclusion, the quest to conquer the manual method of donating money has been turned into an online experience.


## **REFERENCES:**

[1] Stack Overflow - Where Developers Learn, Share, & Build Careers. (n.d.). Stack Overflow. Retrieved 2021, from https://stackoverflow.com/.


[2] PHP Tutorial. (n.d.). Https://Www.W3schools.Com/. Retrieved 2021, from https://www.w3schools.com/php/

## **SNAPSHOTS:**


## **HOMEPAGE**

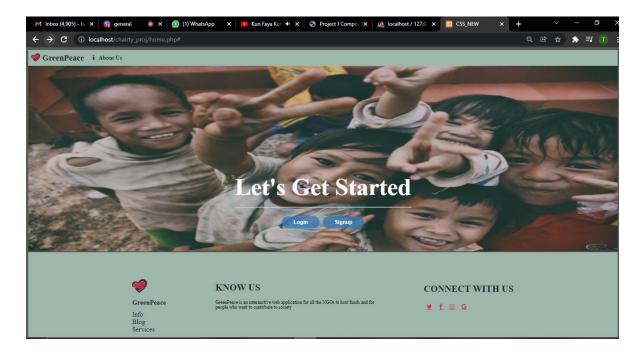


## **LOGIN PAGE**

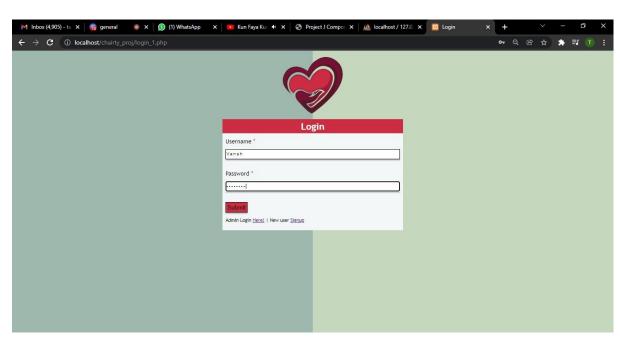


## **SIGNUP PAGE**

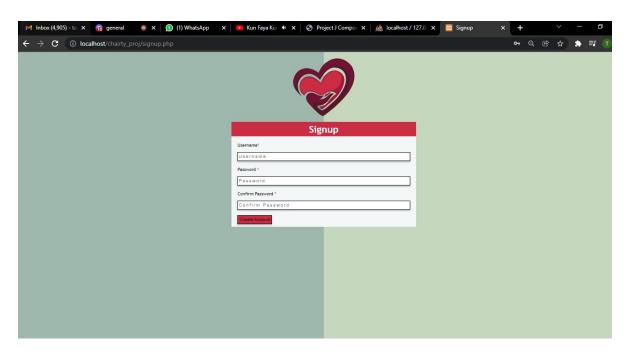


## **ADD CHARITY PAGE**

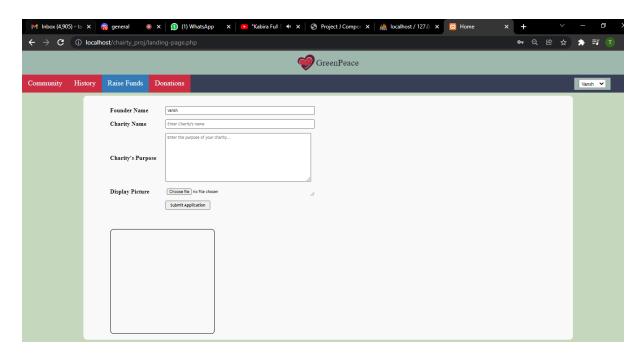


## **DISPLAY ALL CHARITY PAGE**

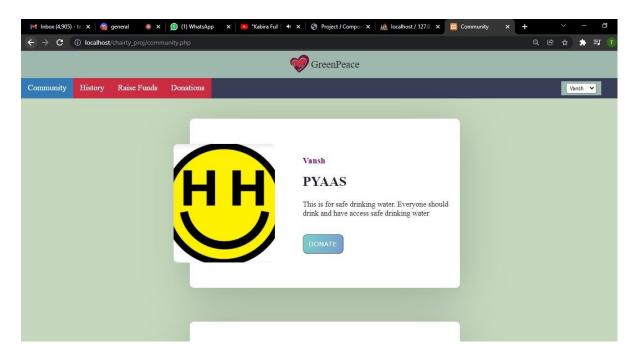


## **DONATION FORM**

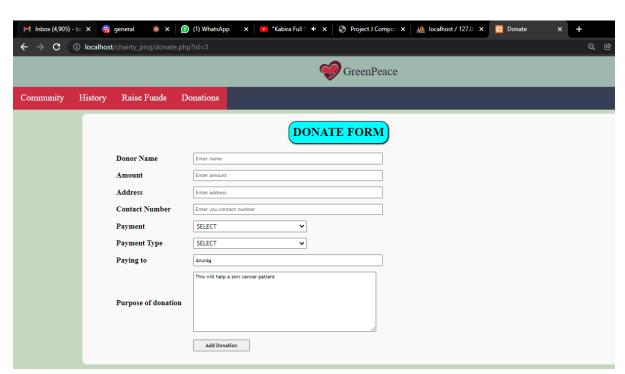


## **DONATION**

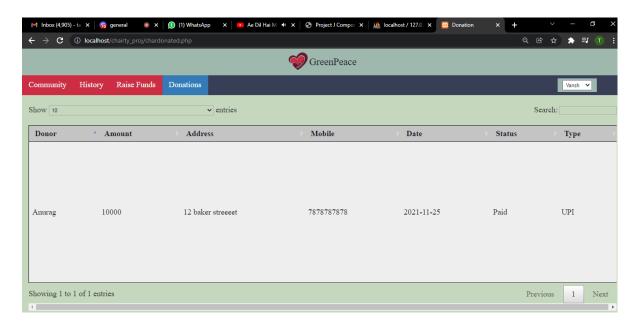


## **ADMIN SIGNIN PAGE**

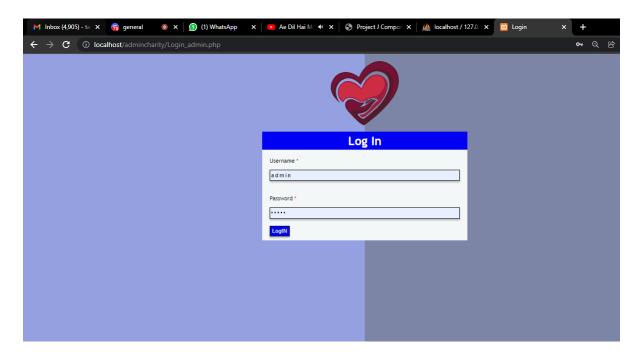


## **USER DETAILS**

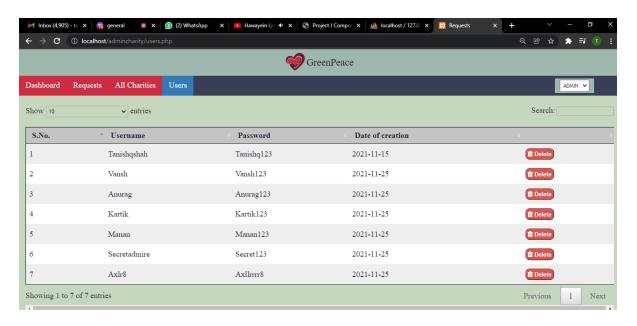


## **DASHBOARD**

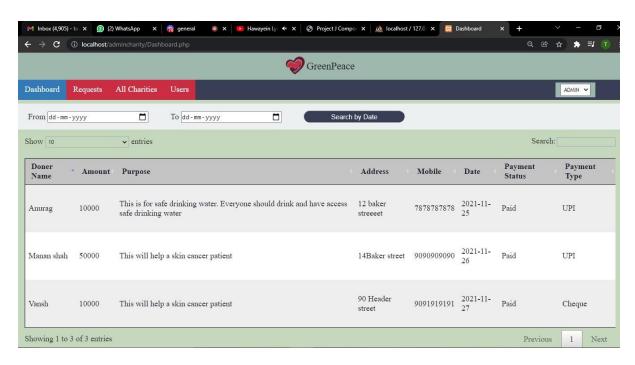


## **REQUEST PAGE**

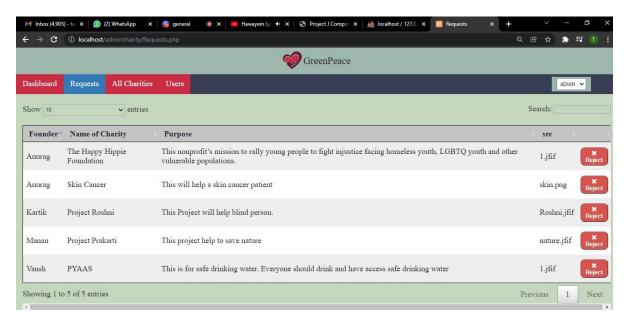

## **ALL CHARITIES**

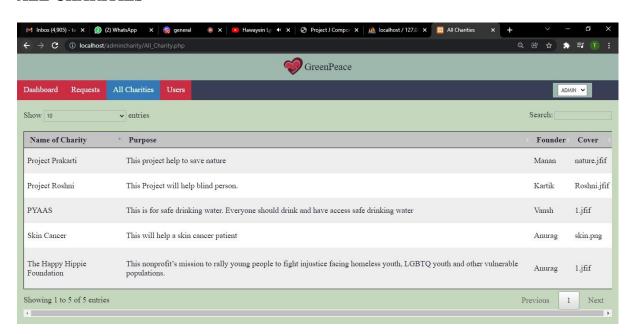

#### **ABOUT US**

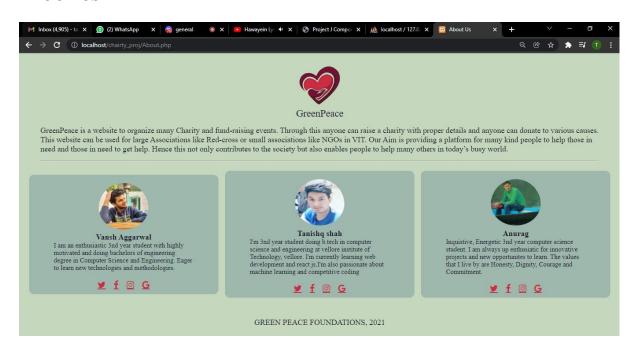

## **SOURCE CODE:**

```
home.php (Index page of our project)
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>CSS_NEW</title>
<link rel="stylesheet" href="home.css">
link
                                                            rel="stylesheet"
                                                                                                                                                                       href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/
awesome.min.css">
</head>
<body>
<div class="navbar">
                                 class="active"
                                                                                                                        id="brand"
                                                                                                                                                                                               href="#"><img
                                                                                                                                                                                                                                                                                        src="GreenPeace.svg"
                                                                                                                                                                                                                                                                                                                                                                                                                 class="brandIcon"
alt=""></i>GreenPeace</a>
```

```
<a href="About.php" class="nav-link"><i class="fa fa-fw fa-info"></i> About Us</a>
</div>
<div class="centered">
<h1 style="margin-bottom: 0px;">Let's Get Started</h1>
<hr id="newHr">
<button class="mButtons" id="login" onclick="">Login</button>
<button class="mButtons" id="signup" onclick="/chairty_proj/signup.php">Signup</button>
</div>
<img src="children.jpg" class="happy" alt="Happiness">
<footer>
<div class="footer-content">
<div class="left-col">
<img src="GreenPeace.svg" alt="" class="charity" style="width: 50px; height: 50px; padding-top: 90px;">
style="margin-bottom:15px" class="aboutList"><a href="#"><b>GreenPeace</b></a></a>
cli class="aboutList"><a href="About.php">Info</a>
cli class="aboutList"><a href="#">Blog</a>
<a href="#">Services</a>
</div>
<div>
<h1 style="color: #1E212D;">KNOW US</h1>
GreenPeace is an interaactive web application for all the NGOs to host funds and for<br/>br>people who want to
contribute to society
</div>
<div class="right-col">
<h1>CONNECT WITH US</h2>
<a href="#" class="fa fa-twitter" style="margin: 10px;color: #cc2d43; font-size:
15pt"></a>
<a href="#" class="fa fa-facebook" style="margin: 10px;color: #cc2d43; font-size:
15pt"></a>
```

```
<a href="#" class="fa fa-instagram" style="margin: 10px;color: #cc2d43; font-size:
15pt"></a>
<a href="#" class="fa fa-google" style="margin: 10px;color: #cc2d43; font-size:
15pt"></a>
</div>
</div>
© 2021 created by GP Foundation
</footer>
<script>
const loginButton = document.getElementById("login"); loginButton.addEventListener("click",()=>{
window.location.href="login_1.php";
})
const signupButton = document.getElementById("signup"); signupButton.addEventListener("click",()=>{
window.location.href="signup.php";
})
</script>
</body>
</html>
signup.php (Signup Form)
<?php
require "partials/_dbconnect.php"; if($_SERVER['REQUEST_METHOD']=='POST'){
$username = $_POST['username'];
$password = $_POST['password'];
$cpassword = $_POST['confirmPassword'];
$ins = "INSERT INTO `users` (`username`, `password`, `dt`) VALUES ('$username', '$password',
current_timestamp())";
$res = mysqli_query($conn, $ins);
if(!$res){
print_r("<h4>Something Went Wrong</h4>");
}
else{
header("location: login_1.php");
```

```
}
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<title>Signup</title>
<link rel="stylesheet" href="signup.css">
<meta name="viewport" content="width=device-width">
<meta name="viewport" content="hight=device-hight">
</head>
<body>
<div id="page">
<img id="logo" src="GreenPeace.svg" alt="logo">
<div id="container">
<h1>Signup</h1>
<div id="form">
<form action="/chairty_proj/signup.php" name='createAccount' method="post" onsubmit="return validate();">
<label for="username">Username<font color='red'>*</font></label>
<input type="text" class="text" name="username" placeholder="Username" required><br>
<label for="password">Password <font color='red'>*</font></label>
<input type="password" class="text" name="password" id="pass1" placeholder="Password" required><br/>str>
<label for="password">Confirm Password <font color='red'>*</font></label>
<input type="password" class="text" name="confirmPassword" id="pass2" placeholder="Confirm Password"
required><br>
```

```
<button type="submit" id="button" value="Submit"">Create Account</button>
</form>
</div>
<script>
function validate(){
var pass1 = document.createAccount.password.value;
var pass2 = document.createAccount.confirmPassword.value; var passw = /^(?=.*\d)(?=.*[a-z])(?=.*[A-z])
Z]).{6,20}$/;
if(!(pass1.match(passw))){
alert("password should be between 6 to 20 characters which contain at least one numeric digit, one uppercase and
one lowercase letter")
return false;
}
if(pass1!=pass2){
alert("Confirm password must be same!"); return false;
return true;
}
</script>
</div>
</div>
</body>
</html>
login_1.php (Login Form)
<?php
require \ "partials/\_dbconnect.php"; if (\$\_SERVER['REQUEST\_METHOD'] == 'POST') \{
$username = $_POST['username'];
$password = $_POST['password'];
```

```
$sql = "SELECT * from users WHERE username='$username'";
$res = mysqli_query($conn, $sql);
$num = mysqli_num_rows($res);
if(\sum_{num>0})
$row = mysqli_fetch_assoc($res); if($row['password']==$password){
$login = true; session_start();
$_SESSION['loggedIn']=true;
$_SESSION['username']=$username; header("location: landing-page.php");
else{
echo "<script>alert('Invalid Credentials')</script>";
}
}
else{
echo "<script>alert('Please make sure you have signed up!')</script>";
}
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<title>Login</title>
<link rel="stylesheet" href="login_1.css">
<meta name="viewport" content="width=device-width">
<meta name="viewport" content="hight=device-hight">
k href="https://fonts.googleapis.com/css2?family=Roboto:wght@300&display=swap" rel="stylesheet">
</head>
<body>
<div id="page">
<img id="logo" src="GreenPeace.svg" alt="logo">
<div id="container">
```

```
<h1>Login</h1>
<div id="form">
<form action="/chairty_proj/login_1.php" method="post">
<label for="username">Username <font color='red'>*</font></label>
<input type="text" class="text" name="username" placeholder="Username" required><br><br><br/><br/><br/>
<label for="password">Password <font color='red'>*</font></label>
<input type="password" class="text" name="password" placeholder="Password" required><br><br><br><br>
<button type="submit" id="button" value="Submit">Submit
</form>
Admin
                                          Login
                                                                                        href="/admincharity/Login_admin.php">Here!</a>
                                                                                                                                                                                                                                                                New
                                                                                                                                                                                                                                                                                          user
                                                                                                                                                                                                                                                                                                                 <a
href="/chairty_proj/signup.php">Signup</a>
</div>
</div>
</div>
</body>
</html>
landing-page.php (New charity form)
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset(\$\_SESSION["loggedIn"]) == false \ ||\ \$\_SESSION["loggedIn"]! = true) \{\ header("location: login\_1.php"); \ hea
exit;
}else{
$user = $_SESSION['username'];
}
?>
<?php
require "partials/_dbconnect.php"; if($_SERVER['REQUEST_METHOD']=='POST'){
$founder = $_POST['username'];
```

```
$charity_name = $_POST['charity'];
$purpose = $_POST['purpose'];
u_n = POST[u_n = ];
$Get_image_name = $_FILES['cover']['name'];
$image_Path = "images/".basename($Get_image_name);
$imageFileType=strtolower(pathinfo($image_Path,PATHINFO_EXTENSION));
if($_FILES['cover']['size']>5000000 || !getimagesize($_FILES['cover']['tmp_name'])){
echo "<script>File may not be an image or the size of the image is greater than 5MB. Please Check!</script>";
die();
}
if (move_uploaded_file($_FILES['cover']['tmp_name'], $image_Path)) {
}else{
echo "Not Insert Image";
}
$ins = "INSERT INTO `charities` (`founder`, `name`, `purpose`, `cover`, `u_name`) VALUES ('$founder',
'$charity_name', '$purpose', '$Get_image_name', '$u_name')";
$res = mysqli query($conn, $ins); if(!$res){
print_r("<h4>Something Went Wrong </h4>".mysqli_error($conn));
} else{
echo("<script>Thank you. You application for new charity has been successfully submitted.
:)</script>");
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Home</title>
<link rel="stylesheet" href="landing-page.css">
```

```
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<script>
$('li#a03').removeAttr('id');
$('.navbar-links ul#main-comps li:nth-child(3) a').attr('id','a03');
</script>
</head>
<body>
<?php require("partials/_nav.php"); ?>
<div class="add-charity">
        action="/chairty_proj/landing-page.php"
                                            autocomplete="off"
                                                                                 checkCred();"
                                                                onsubmit="return
id="charityFrm" method="post" enctype="multipart/form-data">
<input type="hidden" name="u_name" value="Sahil">
<label for="username"><strong>Founder Name</strong></label>
<input type="text" placeholder="Enter Username" name="username" maxlength="40" required readonly
value='<?php echo $user ?>'>
<label for="charity"><strong>Charity Name</strong></label>
<input type="text" placeholder="Enter Charity's name" name="charity" maxlength="40" required>
<label for="purpose" ><strong>Charity's Purpose</strong></label>
= "purpose" id="purpose" cols="67" rows="10" placeholder="Enter the purpose of your
charity..." required maxlength="150"></textarea>
<label for="photo"><strong>Display Picture</strong></label>
<input type="file" name="cover" accept="image/*" id="scream" required>
```

```
<input type="submit" value="Submit Application" onclick="readImage()" id="submitBtn">
</form>
<div id="img-prev" style="border:1px solid #000000; height: 350px; width: 350px;"></div>
</div>
<script>
const choosFile = document.getElementById("scream"); const imagePrev = document.getElementById("img-
prev"); choosFile.addEventListener("change",()=>{
getImageData();
});
function getImageData(){ const files = choosFile.files[0];
if(files){
const fileReader = new FileReader(); fileReader.readAsDataURL(files); fileReader.addEventListener("load",
function () {
imagePrev.style.display = "block";
imagePrev.innerHTML = '<img id="erruptImage" src="' + this.result + "' style="height: 300px; width: 300px;"
/>';
});
function checkCred(){
const fm = document.getElementById("charityFrm"); let username = fm.username;
let charity = fm.charity; let purpose = fm.purpose; let cover = fm.cover;
if(username.value && charity.value && purpose.value && cover.value){ let x = confirm("Please confirm the confirmation that confirm the confirmation the confirmation that confirmation the confirmation the
username is "+username.value); let y = confirm("Please confirm the charity name is "+charity.value);
let z = \text{confirm}(\text{"Please confirm the purpose of charity is "+purpose.value}); if (x \&\& y \&\& z)
alert("Thank you. You application for new charity has been successfully submitted. :)"); return true;
return false;
} else{
alert("Please fill all the entries"); return false;
```

```
}
</script>
</body>
</html>
history.php (For viewing, editing and deleting donor history)
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset(\$\_SESSION['loggedIn']) == false \ \| \$\_SESSION['loggedIn']! = true) \{ \ header("location: login\_1.php"); \} \\
exit;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>History</title>
<link rel="stylesheet" href="history.css">
<!-- <li>rel="stylesheet" type="text/css" href="https://cdn.datatables.net/1.10.24/css/jquery.dataTables.css"> --
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="inner-container">
<div class="upper-body">
<form action='history.php' method="POST">
<div class="date-search">
```

```
<div class="form">
<label for="from">From</label>
<input id="From" type="date" placeholder="dd/mm/yyyy" name="from">
</div>
<div class="form">
<label for="to">To</label>
<input id="to" type="date" placeholder="dd/mm/yyyy" name="to">
</div>
<div class="form">
<button>Search by Date</button>
</div>
</div>
</form>
<div class="table">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
Donate To
Amount
Address
Mobile
Date
Status
<\!\!th\!\!>\!\!Type\!<\!\!/th\!\!>
</thead>
```

```
<?php
$user = $_SESSION['username']; require "partials/_dbconnect.php";
if(\$\_SERVER['REQUEST\_METHOD'] == 'POST') \{
$from = $_POST['from'];
to = POST[to'];
$sql = "SELECT * FROM donors WHERE d_date BETWEEN '$from' AND '$to' AND u_name='$user' ";
$out = mysqli_query($conn,$sql);
$num = mysqli_num_rows($out);
}
else{
$query = "SELECT * FROM `donors` where u_name='$user'";
$out = mysqli_query($conn, $query);
$num = mysqli_num_rows($out);
}
$amt=0; if($num>0){
while($row=mysqli_fetch_assoc($out)){
$amt+=$row['d_amount'];
$date1 = strtr($row['d_date'], '/', '-');
$date = date('Y-m-d', strtotime($date1)); echo "
{$row['founder']}
{$row['d_amount']}
<\!\!td\!\!>\!\!\{\$row['d\_addr']\}<\!\!/td\!\!>
{$row['d_cell']}
{$date}
{\text{yrow}['d\_pay']}
{$row['d_paytype']}
<br/>sbutton class='edits' style='background-color: #0275d8; margin-right: 5px;padding: 5px; font-size: 13pt;
font-weight:
              bold;
                       border-radius:
                                        13px;
                                                cursor:
                                                           pointer;
                                                                     color:white'
                                                                                    id='{$row['d_id']}'
onclick='editThis({$row['d_id']});'><i class='fa fa-pencil' style='font-size: 20px; color: white;' aria-
hidden='true'></i>
Edit</button>
```

<br/>

```
Delete</button>
 ";
}
else{
// echo "<h2>No records to fetch</h2>";
}
?>
</div>
</div>
<div class="table-footer">
<div class="total-amt">
Total Amount : <?php echo $amt; ?>
</div>
</div>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('form').submit((e)=>{
$start = new Date($("input:first").val());
$end = new Date($("input:odd").val()); if($start>$end){
e.preventDefault();
$('p#error').html("<h3>Date range you have entered is invalid</h3>").show().fadeOut(2000);
}
});
$('#a03').removeAttr('id');
```

```
$('.navbar-links ul#main-comps li:nth-child(2) a').attr('id','a03');
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
$('#t01').DataTable();
$('#t01').css("background-color",'#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
} );</script>
<script>
function confDelete(abd){
let x = \text{confirm}(\text{"Do you want to delete this donation history?"}); if(x){
window.location= \chairty_proj/deleteHist.php?id=\{abd}\;
}else{
window.location = \chairty_proj/history.php\;;
}
function editThis(abd){ if(x){
window.location.href = `/chairty_proj/editForm.php?id=${abd}`;
}else{
window.location = \chairty_proj/history.php\;;
}
}
</script>
</body>
</html>
CHARDONATED.PHP (DONATIONS TO THE CHARITIES BY USER)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
```

```
if(isset($_SESSION['loggedIn'])==false || $_SESSION['loggedIn']!=true){ header("location: login_1.php");
exit;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Donation</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<link rel="stylesheet" href="chardonated.css">
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="table">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
Donor
Amount
Address
Mobile
Date
Status
<th>Type</th>
```

```
</thead>
<?php
$user=$_SESSION['username']; require "partials/_dbconnect.php";
// $amt+=$row['d_amount'];
$query = "SELECT * FROM `donors` WHERE founder='$user'";
$out = mysqli_query($conn, $query); if(!$out){
echo "Some issues".mysqli_error($conn);
}
$num = mysqli_num_rows($out); if($num>0){
while($row = mysqli_fetch_assoc($out)){
$date1 = strtr($row['d_date'], '/', '-');
$date = date('Y-m-d', strtotime($date1)); print_r("
<\!\!td\!\!>\!\!\{\$row['d\_name']\}<\!\!/td\!\!>
{$row['d_amount']}
{$row['d_addr']}
{$row['d_cell']}
<\!\!td\!\!>\!\!\{\$date\}\!<\!\!/td\!\!>
<\!\!td\!\!>\!\!\{\$row['d\_pay']\}<\!\!/td\!\!>
{$row['d_paytype']}
 ");
}
?>
</div>
</div>
<!-- <div class="table-footer">
```

```
<div class="button">
<div id="B01">
<button>Previous</button>
</div>
<div id="B02">
<button>Next</button>
</div>
</div>
</div>
</div> -->
<footer>
<div class="copyright">
&copyGPfoundations, 2021
</div>
</footer>
<script>
$('#a03').removeAttr('id');
$('.navbar-links ul#main-comps li:nth-child(4) a').attr('id','a03');
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
$('#t01').DataTable();
$('#t01').css("background-color",'#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
} );</script>
<script>
$("#t01").on("click", "#abc", function() {
$(this).closest("tr").remove();
```

```
});
</script>
</body>
</html>
COMMUNITY.PHP (VIEWING ALL CHARITES)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
}
if(isset(\$\_SESSION['loggedIn']) == false \ ||\ \$\_SESSION['loggedIn']! = true) \{\ header("location: login\_1.php"); \ hea
exit;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Community</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<link rel="stylesheet" href="community.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="row-grid">
<?php
require "partials/_dbconnect.php";
$query = "SELECT * FROM `charities`";
$out = mysqli_query($conn, $query);
```

```
$num = mysqli_num_rows($out); if($num>0){
while($row = mysqli_fetch_assoc($out)){ print_r("
<div class='cards'>
<div class='blog-post'>
<div class='blog-post-img'>
<img src='./images/{$row['cover']}'>
</div>
<div class='blog-post-info'>
<div class='blog-post-date'>
<span style='color: purple;'>
{$row['founder']}
</span>
</div>
<h1 class='title'>{$row['name']}</h1>
{$row['purpose']}
<form action='donate.php?id={$row['id']}' method='get'>
<input type='text' name='id' value='{$row['id']}' hidden>
<button class='cta' style='cursor: pointer; padding: 1rem'>Donate</button>
</form>
</div>
</div>
</div> ");
}
?>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('#a03').removeAttr('id');
```

```
$('.navbar-links ul#main-comps li:nth-child(1) a').attr('id','a03');
</script>
</body>
</html>
DONATE.PHP (DONATION FORM)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset(\$\_SESSION['loggedIn']) == false \ ||\ \$\_SESSION['loggedIn']! = true) \{\ header("location: login\_1.php"); \ hea
exit;
}
?>
<?php
require "partials/_dbconnect.php"; if(isset($_GET['id'])){
$id = $_GET['id'];
$sql = "SELECT * FROM charities WHERE id=$id";
$res = mysqli_query($conn,$sql); if($res){
$row = mysqli_fetch_assoc($res);
$founder = $row['founder'];
$purpose = $row['purpose'];
$user = $_SESSION['username'];
}
} else{
header("location: community.php");
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
```

```
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<link rel="stylesheet" href="donate.css">
<title>Donate</title>
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="add-charity">
<h1 style="margin-left: 37%; margin-bottom: 10px; padding: 10px; box-shadow: 2px 2px 4px black; background-
color: aqua; border: 1px solid black; width: fit-content; border-radius: 20px;">DONATE FORM</h1>
<form action="donateCheck.php" autocomplete="off" onsubmit="return checkCred();" id="charityFrm"
method="POST">
<input type="hidden" name="username" value='<?php echo $user; ?>'>
<label for="name"><strong>Donor Name</strong></label>
="text" placeholder="Enter name" name="d_name" maxlength="40" required>
<label for="amount"><strong>Amount</strong></label>
<input type="number" placeholder="Enter amount" name="amount" maxlength="20" required>
<label for="address"><strong>Address</strong></label>
<input type="text" placeholder="Enter address" name="address" maxlength="50" required>
\langle tr \rangle
<label for="cell_no"><strong>Contact Number</strong></label>
```

```
<input type="text" placeholder="Enter you contact number" name="cell_no" maxlength="10" id="cell_no"
required>
<label for="payment"><strong>Payment</strong></label>
<select name="payment" id="payment" required style="width: 60%;">
<option value="">SELECT</option>
<option value="Paid">Pay Now</option>
<option value="Unpaid">Pay Later
</select>
<label for="pay_type"><strong>Payment Type</strong></label>
<select name="pay_type" id="pay_type" required style="width: 60%;">
<option value="">SELECT</option>
<option>Cash</option>
<option>Cheque</option>
<option>UPI</option>
<option>Others</option>
</select>
<label for="founder"><strong>Paying to</strong></label>
<input type="text" name="founder" value="<?php if($founder){ echo $founder;} else
\{echo~"";\}~?>"~required~readonly>\\
<label for="d_purpose" ><strong>Purpose of donation</strong></label>
="d_purpose" id="d_purpose" cols="67" rows="10" readonly><?php echo $purpose;
?></textarea>
```

```
<input type="submit" value="Add Donation" id="submitBtn">
</form>
</div>
<script>
function checkCred(){
                                  document.getElementById("pay_type");
const
           payment
                                                                              const
                                                                                         paytype
document.getElementById("payment");    const    contact_no = document.getElementById("cell_no");
paymentIndex = payment.selectedIndex;
let paytypeIndex = paytype.selectedIndex; if(paymentIndex==0) { paytype==0) {
console.log(uindex) alert("Please select a value"); return false;
const reg = /^[0-9]{10}$/; if(!reg.test(contact_no.value)){
alert("The phone number should have 10 digits (0-9)") return false;
alert("Thank you for your Donation! :)"); return true;
</script>
<script>
$("#a03").removeAttr('id');
</script>
</body>
</html>
deleteHist.php (For deletion of a record is donor history)
<?php
require "partials/_dbconnect.php"; if(isset($_GET['id'])){
$id = $ GET['id']; echo $id;
$query = "DELETE FROM donors WHERE d_id='$id'";
$out = mysqli_query($conn, $query); if($out){
echo "Hello";
header("location: history.php"); alert("Record Successfully Deleted");
} else{
```

```
echo "Something went wrong ".mysqli_error($conn);
}
} else{
echo "Something went wrong";
}
?>
editForm.php (Edit Donation History)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset($_SESSION['loggedIn'])==false || $_SESSION['loggedIn']!=true){ header("location: login_1.php");
exit;
}
?>
<?php
require "partials/_dbconnect.php"; if(isset($_GET['id'])){
$id = $_GET['id'];
$query = "SELECT * FROM donors WHERE d_id=$id";
$out = mysqli_query($conn,$query); if($out){
$rowN = mysqli_fetch_assoc($out);
$d_name = $rowN['d_name'];
$d_amount = $rowN['d_amount'];
d_addr = NN['d_addr'];
d_cell = N(d_cell');
d_pay = \text{NowN['d_pay']};
$d_paytype = $rowN['d_paytype'];
$founder = $rowN['founder'];
$purpose = $rowN['d_purpose'];
$user = $_SESSION['username'];
} else{
echo "Some Error Occured".mysqli_error($conn);
```

```
}
} else{
header("location: community.php");
}
?>
<?php
require \ "partials/\_dbconnect.php"; if (\$\_SERVER['REQUEST\_METHOD'] == 'POST') \{
d_n = POST[d_n = ];
$username = $_POST['username'];
$d_amount = $_POST['amount'];
$d_addr = $_POST['address'];
$d_cell = $_POST['cell_no'];
$d_pay = $_POST['payment'];
$d_paytype = $_POST['pay_type'];
$founder = $_POST['founder'];
$purpose = $_POST['d_purpose'];
                                                         "UPDATE
$sq1
                                                                                                                 `donors`
                                                                                                                                                                SET
                                                                                                                                                                                                                                                                          '$d_name',
                                                                                                                                                                                                   d_name
                                                                                                                                                                                                                                                                                                                                d_{amount}
"$d\_amount',d\_addr='\$d\_addr',d\_cell='\$d\_cell',d\_pay='\$d\_pay',d\_paytype='\$d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='\$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',founder='$found',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_paytype',d\_pay
er',d_purpose='$purpose' WHERE `donors`.`d_id` = $id; ";
$res = mysqli_query($conn,$sql); if(!$res){
print_r("<h4>Something Went Wrong </h4>".mysqli_error($conn));
} else{ echo("<script>Updated</script>");
header("location: history.php");
}
}
?>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<link rel="stylesheet" href="donate.css">
<title>EDIT DONATION</title>
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="add-charity">
<h1 style="margin-left: 37%; margin-bottom: 10px; padding: 10px; box-shadow: 2px 2px 4px black; background-
color: aqua; border: 1px solid black; width: fit-content; border-radius: 20px;">EDIT DONATION</h1>
<form action="" autocomplete="off" id="charityFrm" method="POST">
<input type="hidden" name="username" value='<?php echo $user; ?>'>
<label for="name"><strong>Donor Name</strong></label>
<input type="text" placeholder="Enter name" name="d_name" maxlength="40" required value='<?php echo
$d name; ?>' >
<label for="amount"><strong>Amount</strong></label>
<input type="number" placeholder="Enter amount" name="amount" maxlength="20" required value='<?php
echo $d amount; ?>' >
<label for="address"><strong>Address</strong></label>
```

```
<input type="text" placeholder="Enter address" name="address" maxlength="50" required value='<?php
echo $d addr; ?>' >
<label for="cell_no"><strong>Contact Number</strong></label>
<input type="text" placeholder="Enter you contact number" name="cell_no" maxlength="10" id="cell_no"
required value='<?php echo $d_cell; ?>' >
<label for="payment"><strong>Payment</strong></label>
<select name="payment" id="payment" required style="width: 60%;">
<option value="">SELECT</option>
<option value="Paid">Pay Now</option>
<option value="Unpaid">Pay Later
</select>
<label for="pay_type"><strong>Payment Type</strong></label>
<select name="pay_type" id="pay_type" required style="width: 60%;">
<option value="">SELECT</option>
<option>Cash</option>
<option>Cheque</option>
<option>UPI</option>
<option>Others</option>
</select>
<label for="founder"><strong>Paying to</strong></label>
<input type="text" name="founder" value="<?php if($founder){ echo $founder;} else
{echo "";} ?>" required readonly>
```

```
<label for="d_purpose" ><strong>Purpose of donation</strong></label>
="d_purpose" id="d_purpose" cols="67" rows="10" readonly><?php echo $purpose;
?></textarea>
<input type="submit" value="Edit Donation" id="submitBtn">
</form>
</div>
<script>
function checkCred(){
                                document.getElementById("pay_type");
const
           payment
                                                                          const
                                                                                     paytype
document.getElementById("payment"); const contact_no = document.getElementById("cell_no");
paymentIndex = payment.selectedIndex;
let paytypeIndex = paytype.selectedIndex; if(paymentIndex==0) | paytype==0) |
console.log(uindex) alert("Please select a value"); return false;
const \ reg = /^[0-9]{10} \ /; \ if(!reg.test(contact\_no.value)){} \ /
alert("The phone number should have 10 digits (0-9)") return false;
alert("Thank you for your Donation! :)"); return true;
</script>
<script>
$("#a03").removeAttr('id');
</script>
</body>
</html>
_nav.php (Partial for the navbar)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
```

```
if(!isset(\$\_SESSION['loggedIn']) \parallel \$\_SESSION['loggedIn']! = true) \{
$isLoggedIn = false;
} else{
$user = $_SESSION['username'];
$isLoggedIn = true;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<link rel="stylesheet" href="partials/_nav.css">
<title>Document</title>
link
                                          rel="stylesheet"
                                                                                                                      href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/
awesome.min.css">
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
</head>
<body>
<div class="header">
<div class="svg">
<img id='logo' src="GreenPeace.svg" alt="GreenPeace">
</div>
<div class="heading">
GreenPeace
</div>
</div>
<nav class="navbar" id="cool">
```

```
<a href="#" href="javascript:void(0);" function="classy(); " class="toggle-button">
<span class="bar"></span>
<span class="bar"></span>
<span class="bar"></span>
<span class="bar"></span>
</a>
<div class="navbar-links">
<a href="community.php">Community</a>
<a href="history.php">History</a>
<a href="landing-page.php" id="a03">Raise Funds</a>
<a href="chardonated.php">Donations</a>
</div>
<div class="brand-title">
<div class="user-title"><select name="user" id="user" style="width: 100%; margin: 0px;">
<option>
<?php if($isLoggedIn){</pre>
echo "<strong>$user</strong>";
} else{
echo "USER";
}?></option>
<?php if($isLoggedIn){ print_r("</pre>
<option value='logout.php'>Logout</option> ");
}
?>
</select></div>
</div>
</nav>
<script>
const x = document.getElementById("user"); x.addEventListener("change",()=>{
alert("Thank You for using our portal:)"); window.location.href=x.options[x.selectedIndex].value;
});
```

```
function classy() {
var \; x = document.getElementById("cool"); \; console.log("Hello"); \;
if (x.className === "navabar") {
x.className += " responsive";
} else {
x.className = "navbar";
}
}
</script>
</body>
</html>
_dbconnect.php (Partial for connecting to a database)
<?php
$server = "localhost";
$username = "root";
$password = "";
$database = "project_1";
$conn = mysqli_connect($server,$username,$password,$database); if(!$conn){
die("Something went wrong not able to connect".mysqli_connect_error());
}
?>
logout.php (For logging out the user)
<?php
session_start(); session_unset();
session_destroy(); header("location: home.php");
?>
About.php
<!DOCTYPE html>
<html lang="en">
```

```
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
                                                   rel="stylesheet"
                                                                                                                                             href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/
link
awesome.min.css">
<title>About Us</title>
<link rel="stylesheet" href="About.css">
<style> body{
padding: 20px;
</style>
</head>
<body>
<div class="about">
<div class="nav-content">
<img src="./Assets/GreenPeace.svg" alt="GreenPeace">
<div class="brand-name">
GreenPeace
</div>
</div>
</div>
<div class="about-content">
>
GreenPeace is a website to organize many Charity and fund-raising events. Through this anyone can raise a charity
```

GreenPeace is a website to organize many Charity and fund-raising events. Through this anyone can raise a charity with proper details and anyone can donate to various causes. This website can be used for large Associations like Red-cross or small associations like NGOs in VIT. Our Aim is providing a platform for many kind people to help those in need and those in need to get help. Hence this not only contributes to the society but also enables people to help many others in today's busy world.

```
</div>
<br>
<hr>
```

<br>>

```
<div class="column">
<div class="column-items" style="background-color: #9FB8AD; padding: 5px; border-radius: 15px; margin:</p>
10px;">
<img src="./Assets/IMG_2470.JPG" alt="Picture">
<div class="name"><h2>Punit Middha</h2></div>
<I am an enthusiastic 2nd year student with highly motivated and doing bachelors of engineering degree in</p>
Computer Science and Engineering. Eager to learn new technologies and methodologies.
<div class="icons">
<a href="#" class="fa fa-twitter" style="margin: 10px;color: #cc2d43; font-size: 20pt"></a>
<a href="#" class="fa fa-facebook" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-instagram" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-google" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
</div>
</div>
<div class="column-items" style="background-color: #9FB8AD; padding: 5px; border-radius: 15px; margin:</p>
10px;">
<img src="./Assets/Tirth.jpeg" alt="Picture">
<div class="name"><h2>Tirth Shingala</h2></div>
<I'm 2nd year student doing b.tech in computer science and engineering at vellore institute of Technology,</p>
vellore. I'm currently learning web development and react js.I'm also passionate about machine learning and
competitive coding
<div class="icons">
<a href="#" class="fa fa-twitter" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-facebook" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-instagram" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-google" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
</div>
</div>
<div class="column-items" style="background-color: #9FB8AD; padding: 5px; border-radius: 15px; margin:</p>
```

```
10px;">
<img src="./Assets/Sahil.jpeg" alt="Picture">
<div class="name"><h2>Sahil Harjai</h2></div>
Inquistive, Energetic 2nd year computer science student. I am always up enthusiatic for innovative projects
and new opportunites to learn. The values that I live by are Honesty, Dignity, Courage and Commitment.
<div class="icons">
<a href="#" class="fa fa-twitter" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-facebook" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-instagram" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
<a href="#" class="fa fa-google" style="margin: 10px;color: #cc2d43; font-size:
20pt"></a>
</div>
</div>
</div>
<footer>
<div class="copyright"> &copyGPfoundations, 2021
</div>
</footer>
</body>
</html>
ADMIN SITE
Login_admin.php (Login form for the admin)
<?php if($_SERVER['REQUEST_METHOD']=='POST'){</pre>
$username = $_POST['username'];
$password = $_POST['password']; if($username=='admin' && $password=='admin'){
$login = true; session start();
$_SESSION['loggedIn']=true;
$_SESSION['username']=$username; header("location: users.php");
} else{ echo "
<script>alert('Invalid Credentials');</script> ";
```

```
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<title>Login</title>
<link rel="stylesheet" href="Login_admin.css">
<meta name="viewport" content="width=device-width">
<meta name="viewport" content="hight=device-hight">
</head>
<body>
<div id="page">
<img id="logo" src="./Assets/GreenPeace.svg" alt="logo">
<div id="container">
<h1>Log In</h1>
<div id="form">
<form action="/admincharity/Login_admin.php" name='createAccount' method="post">
<label for="username">Username <font color='red'>*</font></label>
<label for="password">Password <font color='red'>*</font></label>
<input type="password" class="text" name="password" id="pass1" placeholder="Password" required><br>
<button type="submit" id="button" value="Submit" onclick='validate()'>Create Account</button>
</form>
</div>
</div>
</div>
</body>
</html>
users.php (USER TABLE)
<?php require "partials/_dbconnect.php"; ?>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Requests</title>
<link rel="stylesheet" href="users.css">
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="table" style="margin: 0px; background-color: #C5D7BD;">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
<th>>S.No.</th>
Username
Password
Date of creation
</thead>
<?php
$query = "SELECT * FROM `users`";
$out = mysqli_query($conn, $query);
```

```
$num = mysqli_num_rows($out);
$sno=1; if($num>0){
while($row = mysqli_fetch_assoc($out)){
id = \text{srow['id']};
$date1 = strtr($row['dt'], '/', '-');
$date = date('Y-m-d', strtotime($date1)); print_r("
{sno}
{$row['username']}
{$row['password']}
{$date}
>
<form action='deleteUser.php' method='GET' onsubmit='return confDelete();'>
<input type='text' name='id' id='hi' value='{$id}' hidden>
<button style='background-color: #d9534f; padding: 5px; font-size: 13pt; font- weight: bold; border-radius: 13px;</p>
cursor: pointer; color:white' id='abc' onclick='confDelete();'><i class='fa fa-trash' style='font-size: 20px; color:
white; aria-hidden='true'></i>
Delete</button>
</form>
"
);
$sno++;
?>
</div>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('#a03').removeAttr('id');
```

```
$('.navbar-links ul#main-comps li:nth-child(4) a').attr('id','a03');
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
$('#t01').DataTable();
$('#t01').css("background-color",'#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
});
</script>
<script>
function confDelete(){
let x = confirm("Do you want to delete this user for the portal?"); let k = document.getElementById('hi');
sno = k.value; if(x)
return true;
}else{ return false;
}
</script>
</body>
</html>
Requests.php (For Rejecting/Deleting the Charities from the portal)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset($_SESSION['loggedIn'])==false
                                              $_SESSION['loggedIn']!=true){
                                                                                             header("location:
Login_admin.php");
exit;
}
?>
```

```
<?php require "partials/_dbconnect.php"; ?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Requests</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
<link rel="stylesheet" href="Requests.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="table" style="margin: 0px; background-color: #C5D7BD;">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
Founder
Name of Charity
Purpose
src
</thead>
<?php
$query = "SELECT * FROM `charities`";
$out = mysqli_query($conn, $query);
```

```
$num = mysqli_num_rows($out);
$sno=0; if($num>0){
while($row = mysqli_fetch_assoc($out)){ print_r("
{srow['founder']}
{$row['name']}
{$row['purpose']}
{$row['cover']}
<button style='background-color: #d9534f; padding: 5px; font-size: 13pt; font-weight: bold; border-radius: 13px;</p>
cursor: pointer; color:white' id='abc' onclick='confDelete({$row['id']});'><i class='fa fa-times' style='font-size:
20px; color: white; aria- hidden='true'></i>
Reject</button>
"
);
$sno++;
}
?>
</div>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('#a03').removeAttr('id');
$('.navbar-links ul#main-comps li:nth-child(2) a').attr('id','a03');
$('#a03').css("background-color","#337AB7");
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
```

```
$('#t01').DataTable();
$('#t01').css("background-color",'#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
});
</script>
<script>
$("#t01").on("click", "#abc", function() {
$(this).closest("tr").remove();
});
</script>
<script>
function confDelete(abd){
let x = \text{confirm}(\text{"Do you want to Reject/Delete this Charity from the portal?"}); if(x){
window.location= \( \)/admincharity/deleteCharity.php?id=\( \){abd}\( \);
}else{
window.location = \( \)/admincharity/Requests.php\( \);
}
</script>
</body>
</html>
All_Charity.php (View all charities in the system)
<?php require "partials/_dbconnect.php"; ?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>All Charities</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
<link rel="stylesheet" href="Requests.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="table" style="margin: 0px; background-color: #C5D7BD;">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
Name of Charity
Purpose
Founder
Cover
</thead>
<?php
$query = "SELECT * FROM `charities`";
$out = mysqli_query($conn, $query);
$num = mysqli_num_rows($out); if($num>0){
while($row = mysqli_fetch_assoc($out)){ print_r("
{$row['name']}
{$row['purpose']}
{$row['founder']}
{$row['cover']}
"
);
```

```
}
}
?>
</div>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('#a03').removeAttr('id');
$('.navbar-links ul#main-comps li:nth-child(3) a').attr('id','a03');
$('#a03').css("background-color","#337AB7");
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
$('#t01').DataTable();
(\#t01').css("background-color",\#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
});
</script>
<script>
$("#t01").on("click", "#abc", function() {
$(this).closest("tr").remove();
});
</script>
</body>
</html>
```

```
Dashboard.php (Viewing all donations in the system)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
if(isset($_SESSION['loggedIn'])==false
                                           $_SESSION['loggedIn']!=true){
                                                                                       header("location:
Login_admin.php");
exit;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Dashboard</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
<link rel="stylesheet" href="Dashboard.css">
k rel="stylesheet" href="//cdn.datatables.net/1.10.24/css/jquery.dataTables.min.css">
</head>
<body>
<?php require "partials/_nav.php"; ?>
<div class="inner-container">
<div class="upper-body">
<div class="date-search">
<form method="post" action='Dashboard.php'>
<div class="form">
<label for="from">From</label>
<input id="From" type="date" placeholder="dd/mm/yyyy" name="from">
</div>
<div class="form">
```

```
<label for="to">To</label>
<input id="to" type="date" placeholder="dd/mm/yyyy" name="to">
</div>
<div class="form">
<button>Search by Date</button>
</div>
</form>
</div>
<div class="table">
<div class="table-content" style="overflow-x: auto;" >
<thead id="head">
Doner Name
Amount
Purpose
Address
Mobile
Date
Payment Status
Payment Type
</thead>
<?php
\$user = \$\_SESSION['username']; require "partials/\_dbconnect.php";
if (\$\_SERVER['REQUEST\_METHOD'] {==} "POST') \{
$from = $_POST['from'];
```

```
to = POST['to'];
$sql = "SELECT * FROM donors WHERE d_date BETWEEN '$from' AND '$to'";
$out = mysqli_query($conn,$sql);
$num = mysqli_num_rows($out);
}
else{
$query = "SELECT * FROM `donors`";
$out = mysqli_query($conn, $query);
$num = mysqli_num_rows($out);
$amt=0; if($num>0){
while($row=mysqli_fetch_assoc($out)){
$amt+=$row['d_amount'];
$date1 = strtr($row['d_date'], '/', '-');
$date = date('Y-m-d', strtotime($date1)); echo "
{$row['d_name']}
<\!\!td\!\!>\!\!\{\$row['d\_amount']\}<\!\!/td\!\!>
{srow['d\_purpose']}
<\!\!td\!\!>\!\!\{\$row['d\_addr']\}<\!\!/td\!\!>
{$row['d_cell']}
<\!\!td\!\!>\!\!\{\$date\}\!<\!\!/td\!\!>
<\!\!td\!\!>\!\!\{\$row['d\_pay']\}<\!\!/td\!\!>
<\!\!td\!\!>\!\!\{\$row['d\_paytype']\}<\!\!/td\!\!>
 ";
}
// echo "<h2>No records to fetch</h2>";
}
?>
```

```
</div>
</div>
<div class="table-footer">
<div class="total-amt">
Total Amount : <?php echo $amt; ?>
</div>
</div>
</div>
<div class="copyright"> &copyGPfoundations, 2021
</div>
<script>
$('form').submit((e)=>{
$start = new Date($("input:first").val());
$end = new Date($("input:odd").val()); if($start>$end){
e.preventDefault();
$('p#error').html("<h3>Date range you have entered is invalid</h3>").show().fadeOut(2000);
}
});
$('#a03').removeAttr('id');
$('.navbar-links ul#main-comps li:nth-child(1) a').attr('id','a03');
$('#a03').css("background-color","#337AB7");
</script>
<script src="//cdn.datatables.net/1.10.24/js/jquery.dataTables.min.js"></script>
<script>
$(document).ready( function () {
$('#t01').DataTable();
$('#t01').css("background-color",'#C5D7BD')
$('tr:odd').css("background-color",'#eee');
$('tr:even').css("background-color",'#fff');
```


```
});
</script>
<script>
$("#t01").on("click", "#abc", function() {
$(this).closest("tr").remove();
});
</script>
</body>
</html>
deleteUser.php (For Deleting the user from the portal)
<?php
require "partials/_dbconnect.php"; if(isset($_GET['id'])){
$id = $_GET['id']; echo $id;
$query = "DELETE FROM users WHERE id='$id";
$out = mysqli_query($conn, $query); if($out){
echo "<script>alert('Record Successfully Deleted');</script>"; header("location: users.php");
} else{
echo "Something went wrong ".mysqli_error($conn);
}
} else{
echo "Something went wrong";
}
?>
_nav.php (Partial for displaying the navbar)
<?php
if (session_status() === PHP_SESSION_NONE) { session_start();
if(!isset(\$\_SESSION['loggedIn']) \parallel \$\_SESSION['loggedIn']! = true) \{
$isLoggedIn = false;
} else{
$user = $_SESSION['username'];
```


```
$isLoggedIn = true;
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<link rel="stylesheet" href="partials/_nav.css">
                                            rel="stylesheet"
                                                                                                                        href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/font-awesome/4.7.0/css/
link
awesome.min.css">
<title>Document</title>
<script src="https://code.jquery.com/jquery-3.6.0.min.js" integrity="sha256-</pre>
/xUj+3OJU5yExlq6GSYGSHk7tPXikynS7ogEvDej/m4=" crossorigin="anonymous"></script>
</head>
<body>
<div class="header">
<div class="svg">
<img src="./Assets/GreenPeace.svg" alt="GreenPeace">
</div>
<div class="heading">
GreenPeace
</div>
</div>
<nav class="navbar">
<a href="#" class="toggle-button">
<span class="bar"></span>
<span class="bar"></span>
<span class="bar"></span>
```


```
<span class="bar"></span>
</a>
<div class="navbar-links">
<a href="Dashboard.php">Dashboard</a>
<a href="Requests.php">Requests</a>
<a href="All_Charity.php" id="a03">All Charities</a>
<a href="users.php">Users</a>
</div>
<div class="brand-title"><select name="admin" id="admin" style="width: 100%; margin: 0px;">
<option>ADMIN</option>
<option value="logout.php">Logout</option>
</select>
</div>
</nav>
<script>
const x = document.getElementById("admin"); x.addEventListener("change",()=>{
alert("Thank You for using our portal:)"); window.location.href=x.options[x.selectedIndex].value;
});
</script>
</body>
</html>
logout.php (for logging admin out of portal)
<?php
session_start(); session_unset(); session_destroy();
header("location: Login_admin.php");
?>
_dbconnect.php (Partial for connecting to a database)
<?php
```


```
$server = "localhost";
$username = "root";
$password = "";
$database = "project_1";
$conn = mysqli_connect($server,$username,$password,$database); if(!$conn){die("Something went wrong not able to connect".mysqli_connect_error());
}
?>
```

## **CSS FILES**

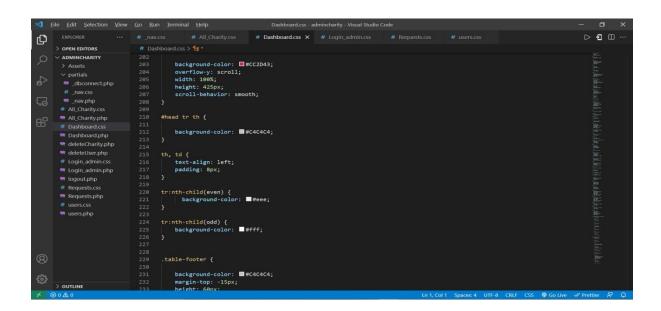

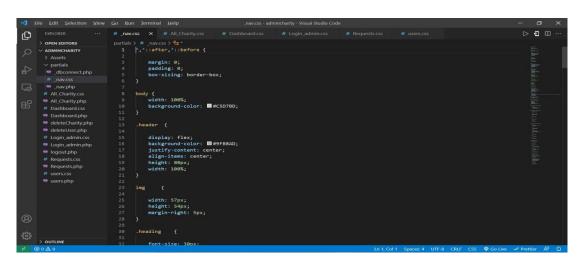

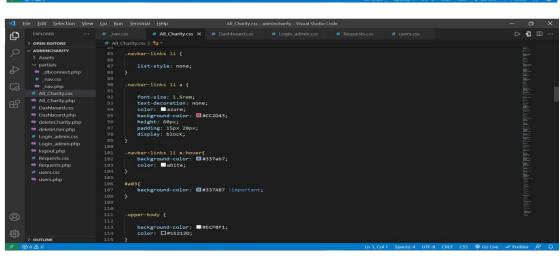

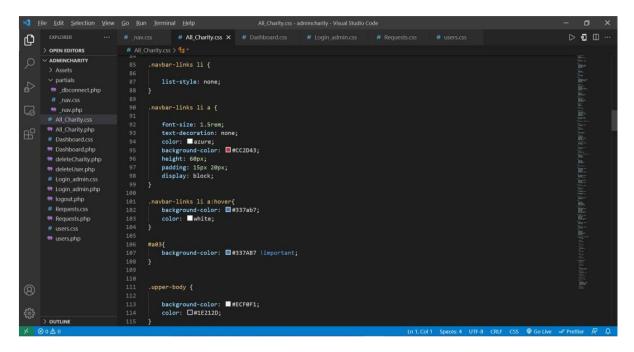

```
Tile Edit Selection View Go Bun Terminal Help
                                                                 _nav.css - admincharity - Visual Studio Code
                          #_nav.css X # All_Charity.css # Dashboard.css # Login_admin.css # Requests.css # users.css
                                                                                                                                                   ▷ • □ ·
0
                          > OPEN EDITORS
    ∨ ADMINCHARITY
                                    margin: 0;
padding: 0;
                                    box-sizing: border-box;
                           8 body {
9 | width: 100%;
10 | background-color: ■#C5D78D;
11 }
     All_Charity.php
                                    display: flex;
background-color: ■#9FB8AD;
                                   justify-content: center; align-items: center;
      m logout.php
                                    height: 80px;
width: 100%;
                                    width: 57px;
height: 54px;
                                    margin-right: 5px;
                                 font-size: 30ox:
```

