FOUNDATION OF JAVA LAB SHEET – 11

JAVA GUI & EVENT HANDLING

Applets • AWT • Swing • Layout Managers • Delegation Event Model • Event Listeners

Instructions

Write, compile, and execute each program. Use Java AWT and Swing components as specified. Focus on GUI design, components, layouts, and event handling.

Q1. Student Registration Form — AWT

Create a Java AWT application to design a Student Registration Form containing Label and TextField for Student Name, Roll Number and Course; Checkbox for Gender; Choice for Semester; Submit and Reset buttons. Submit should display entered information; Reset should clear all fields.

Concepts: Frame, Label, TextField, Checkbox, Choice, Button, AWT event handling.

```
import java.awt.*;
import java.awt.event.*;

public class Main extends Frame implements ActionListener {
    TextField name, roll, course;
    Checkbox male, female;
    Choice semester;
    Button submit, reset;

    Main() {
        setLayout(new FlowLayout());

        add(new Label("Student Name:"));
        name = new TextField(20);
        add(name);

        add(new Label("Roll Number:"));
        roll = new TextField(20);
        add(roll);

        add(new Label("Course:"));
        course = new TextField(20);
        add(course);

        add(new Label("Gender:"));
        male = new Checkbox("Male");
```

```
        female = new Checkbox("Female");
        add(male);
        add(female);

        add(new Label("Semester:"));
        semester = new Choice();
        semester.add("1");
        semester.add("2");
        semester.add("3");
        semester.add("4");
        add(semester);

        submit = new Button("Submit");
        reset = new Button("Reset");
        add(submit);
        add(reset);

        submit.addActionListener(this);
        reset.addActionListener(this);

        setTitle("Student Registration");
        setSize(300, 300);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e) {
        if (e.getSource() == submit) {
            String gender = male.getState() ? "Male" : "Female";

            System.out.println("Name: " + name.getText());
            System.out.println("Roll: " + roll.getText());
            System.out.println("Course: " + course.getText());
            System.out.println("Gender: " + gender);
            System.out.println("Semester: " + semester.getSelectedItem());
        } else {
            name.setText("");
            roll.setText("");
            course.setText("");
            male.setState(false);
            female.setState(false);
            semester.select(0);
        }
    }
```

```
    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Name: Sumit
Roll: 101
Course: BCA
Gender: Male
Semester: 3

Q2. Simple Calculator — AWT
Create a Java AWT-based calculator with two TextFields, four Buttons for Addition, Subtraction, Multiplication and Division, and a result display. Perform the selected operation and handle division by zero.
Concepts: AWT components, Button, TextField, ActionListener, event handling.

```
import java.awt.*;
import java.awt.event.*;

public class Main extends Frame implements ActionListener {
    TextField n1, n2, result;
    Button add, sub, mul, div;

    Main() {
        setLayout(new FlowLayout());

        add(new Label("Number 1:"));
        n1 = new TextField(10);
        add(n1);

        add(new Label("Number 2:"));
        n2 = new TextField(10);
        add(n2);

        add = new Button("Addition");
        sub = new Button("Subtraction");
        mul = new Button("Multiplication");
        div = new Button("Division");

        add(add);
```

```
        add(sub);
        add(mul);
        add(div);

        result = new TextField(15);
        result.setEditable(false);
        add(new Label("Result:"));
        add(result);

        add.addActionListener(this);
        sub.addActionListener(this);
        mul.addActionListener(this);
        div.addActionListener(this);

        setTitle("AWT Calculator");
        setSize(300, 250);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e) {
        double a = Double.parseDouble(n1.getText());
        double b = Double.parseDouble(n2.getText());

        if (e.getSource() == add)
            result.setText("" + (a + b));
        else if (e.getSource() == sub)
            result.setText("" + (a - b));
        else if (e.getSource() == mul)
            result.setText("" + (a * b));
        else if (e.getSource() == div) {
            if (b == 0)
                result.setText("Cannot divide by zero");
            else
                result.setText("" + (a / b));
        }
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:

Number 1: 20

Number 2: 5
Addition → Result: 25.0
Subtraction → Result: 15.0
Multiplication → Result: 100.0
Division → Result: 4.0

Q3. Student Login Form — Swing
Create a Swing login form with JLabel/JTextField for username, JLabel/JPasswordField for password, Login and Reset buttons. On Login, compare with predefined credentials and display the result using JOptionPane.
Concepts: JFrame, JLabel, JTextField, JPasswordField, JButton, JOptionPane, ActionListener.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
    JTextField username;
    JPasswordField password;
    JButton login, reset;

    Main() {
        setLayout(new FlowLayout());

        add(new JLabel("Username:"));
        username = new JTextField(15);
        add(username);

        add(new JLabel("Password:"));
        password = new JPasswordField(15);
        add(password);

        login = new JButton("Login");
        reset = new JButton("Reset");
        add(login);
        add(reset);

        login.addActionListener(this);
        reset.addActionListener(this);

        setTitle("Student Login");
```

```
        setSize(300, 200);
        setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e) {
        if (e.getSource() == login) {
            String user = username.getText();
            String pass = new String(password.getPassword());

            if (user.equals("Sumit") && pass.equals("1234"))
                JOptionPane.showMessageDialog(this, "Login Successful");
            else
                JOptionPane.showMessageDialog(this, "Invalid Username or Password");
        } else {
            username.setText("");
            password.setText("");
        }
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Username: Sumit
Password: 1234
→ Login Successful

Q4. Student Marksheet GUI — Swing
Create a Swing application accepting marks for English, Mathematics, Java, DBMS and Computer Networks. Add a Calculate Result button to display total, percentage, grade and pass/fail status.
Concepts: Swing components, event handling, GUI-based calculation.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
```

```
JTextField eng, math, java, dbms, cn;
JButton calculate;

Main() {
    setLayout(new FlowLayout());

    add(new JLabel("English:"));
    eng = new JTextField(10); add(eng);

    add(new JLabel("Mathematics:"));
    math = new JTextField(10); add(math);

    add(new JLabel("Java:"));
    java = new JTextField(10); add(java);

    add(new JLabel("DBMS:"));
    dbms = new JTextField(10); add(dbms);

    add(new JLabel("Computer Networks:"));
    cn = new JTextField(10); add(cn);

    calculate = new JButton("Calculate Result");
    add(calculate);
    calculate.addActionListener(this);

    setTitle("Student Marksheet");
    setSize(300, 350);
    setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    setVisible(true);
}

public void actionPerformed(ActionEvent e) {
    int a = Integer.parseInt(eng.getText());
    int b = Integer.parseInt(math.getText());
    int c = Integer.parseInt(java.getText());
    int d = Integer.parseInt(dbms.getText());
    int f = Integer.parseInt(cn.getText());

    int total = a + b + c + d + f;
    double percentage = total / 5.0;

    String grade;
    if (percentage >= 90)
        grade = "A";
```

```
        else if (percentage >= 75)
            grade = "B";
        else if (percentage >= 60)
            grade = "C";
        else if (percentage >= 40)
            grade = "D";
        else
            grade = "F";

        String status = percentage >= 40 ? "PASS" : "FAIL";

        JOptionPane.showMessageDialog(this,
                "Total: " + total +
                "\nPercentage: " + percentage + "%" +
                "\nGrade: " + grade +
                "\nStatus: " + status);
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Total: 425
Percentage: 85.0%
Grade: B
Status: PASS

Q5. Course Selection Form — Swing
Create a Swing GUI with Student Name (JTextField), Course (JComboBox), Gender (JRadioButton), Subjects (multiple JCheckBox), Submit and Reset buttons. Submit should display all selected information using JOptionPane.
Concepts: JComboBox, JRadioButton, ButtonGroup, JCheckBox, JOptionPane, event handling.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
    JTextField name;
```

```
JComboBox<String> course;
JRadioButton male, female;
JCheckBox java, dbms, cn;
JButton submit, reset;

Main() {
    setLayout(new FlowLayout());

    add(new JLabel("Student Name:"));
    name = new JTextField(15);
    add(name);

    add(new JLabel("Course:"));
    course = new JComboBox<>(new String[]{"BCA", "BBA", "B.Tech", "MCA"});
    add(course);

    add(new JLabel("Gender:"));
    male = new JRadioButton("Male");
    female = new JRadioButton("Female");

    ButtonGroup bg = new ButtonGroup();
    bg.add(male);
    bg.add(female);
    add(male);
    add(female);

    add(new JLabel("Subjects:"));
    java = new JCheckBox("Java");
    dbms = new JCheckBox("DBMS");
    cn = new JCheckBox("Computer Networks");

    add(java);
    add(dbms);
    add(cn);

    submit = new JButton("Submit");
    reset = new JButton("Reset");
    add(submit);
    add(reset);

    submit.addActionListener(this);
    reset.addActionListener(this);

    setTitle("Course Selection Form");
```

```
        setSize(350, 350);
        setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e) {
        if (e.getSource() == submit) {
            String gender = male.isSelected() ? "Male" : "Female";

            String subjects = "";
            if (java.isSelected()) subjects += "Java ";
            if (dbms.isSelected()) subjects += "DBMS ";
            if (cn.isSelected()) subjects += "Computer Networks";

            JOptionPane.showMessageDialog(this,
                    "Name: " + name.getText() +
                    "\nCourse: " + course.getSelectedItem() +
                    "\nGender: " + gender +
                    "\nSubjects: " + subjects);
        } else {
            name.setText("");
            course.setSelectedIndex(0);
            bgClear();
        }
    }

    void bgClear() {
        male.setSelected(false);
        female.setSelected(false);
        java.setSelected(false);
        dbms.setSelected(false);
        cn.setSelected(false);
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Name: Sumit
Course: BCA
Gender: Male
Subjects: Java DBMS Computer Networks

Q6. Employee Registration Form — AWT
Create an AWT Employee Registration Form with Employee ID, Name, Department, Designation, Salary, Gender, Department selection, Submit and Clear buttons. Display submitted information in a TextArea and clear fields using Clear.
Concepts: AWT components, TextArea, Choice, CheckboxGroup, event handling.

```
import java.awt.*;
import java.awt.event.*;

public class Main extends Frame implements ActionListener {

    TextField id, name, designation, salary;
    Choice department;
    Checkbox male, female;
    CheckboxGroup gender;
    TextArea output;
    Button submit, clear;

    Main() {
        setLayout(new FlowLayout());

        add(new Label("Employee ID:"));
        id = new TextField(15);
        add(id);

        add(new Label("Name:"));
        name = new TextField(15);
        add(name);

        add(new Label("Department:"));
        department = new Choice();
        department.add("IT");
        department.add("HR");
        department.add("Finance");
        add(department);

        add(new Label("Designation:"));
        designation = new TextField(15);
        add(designation);

        add(new Label("Salary:"));
        salary = new TextField(15);
        add(salary);
```

```
        add(new Label("Gender:"));
        gender = new CheckboxGroup();
        male = new Checkbox("Male", gender, false);
        female = new Checkbox("Female", gender, false);
        add(male);
        add(female);

        submit = new Button("Submit");
        clear = new Button("Clear");
        add(submit);
        add(clear);

        output = new TextArea(8, 30);
        add(output);

        submit.addActionListener(this);
        clear.addActionListener(this);

        setTitle("Employee Registration");
        setSize(350, 500);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e) {
        if (e.getSource() == submit) {
            String g = gender.getSelectedCheckbox() == null
                    ? "Not Selected"
                    : gender.getSelectedCheckbox().getLabel();

            output.setText(
                "Employee ID: " + id.getText() +
                "\nName: " + name.getText() +
                "\nDepartment: " + department.getSelectedItem() +
                "\nDesignation: " + designation.getText() +
                "\nSalary: " + salary.getText() +
                "\nGender: " + g
            );
        } else {
            id.setText("");
            name.setText("");
            designation.setText("");
            salary.setText("");
            gender.setSelectedCheckbox(null);
```

```
            output.setText("");
        }
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Employee ID: 101
Name: Sumit
Department: IT
Designation: Developer
Salary: 50000
Gender: Male

Q7. Temperature Converter — Swing
Create a Swing temperature converter with a temperature TextField, Celsius-to-Fahrenheit and Fahrenheit-to-Celsius radio buttons, Convert and Clear buttons, and result display. Use F=(C×9/5)+32 and C=(F−32)×5/9. Handle invalid input.
Concepts: Swing, JRadioButton, ButtonGroup, JTextField, JButton, event handling, input validation.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
    JTextField temp, result;
    JRadioButton cToF, fToC;
    JButton convert, clear;

    Main() {
        setLayout(new FlowLayout());

        add(new JLabel("Temperature:"));
        temp = new JTextField(10);
        add(temp);

        cToF = new JRadioButton("Celsius to Fahrenheit", true);
        fToC = new JRadioButton("Fahrenheit to Celsius");
```

```
    ButtonGroup bg = new ButtonGroup();
    bg.add(cToF);
    bg.add(fToC);

    add(cToF);
    add(fToC);

    convert = new JButton("Convert");
    clear = new JButton("Clear");
    add(convert);
    add(clear);

    add(new JLabel("Result:"));
    result = new JTextField(15);
    result.setEditable(false);
    add(result);

    convert.addActionListener(this);
    clear.addActionListener(this);

    setTitle("Temperature Converter");
    setSize(350, 250);
    setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    setVisible(true);
}

public void actionPerformed(ActionEvent e) {
    if (e.getSource() == convert) {
        try {
            double t = Double.parseDouble(temp.getText());
            double r;

            if (cToF.isSelected())
                r = (t * 9 / 5) + 32;
            else
                r = (t - 32) * 5 / 9;

            result.setText(String.format("%.2f", r));

        } catch (NumberFormatException ex) {
            JOptionPane.showMessageDialog(this, "Invalid temperature!");
        }
    } else {
```

```
            temp.setText("");
            result.setText("");
        }
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Temperature: 100
Celsius to Fahrenheit
Result: 212.00

Q8. Simple Notepad — Swing
Create a basic Swing Notepad with JTextArea and a menu bar containing File → New, Open, Save and Exit. New clears the text area; Open selects a text file; Save writes the contents to a file; Exit closes the application.
Concepts: JFrame, JTextArea, JMenuBar, JMenu, JMenuItem, file handling, event handling.

```
import javax.swing.*;
import java.awt.event.*;
import java.io.*;

public class Main extends JFrame implements ActionListener {
    JTextArea textArea;
    JMenuItem newFile, open, save, exit;

    Main() {
        textArea = new JTextArea();
        add(new JScrollPane(textArea));

        JMenuBar bar = new JMenuBar();
        JMenu file = new JMenu("File");

        newFile = new JMenuItem("New");
        open = new JMenuItem("Open");
        save = new JMenuItem("Save");
        exit = new JMenuItem("Exit");

        file.add(newFile);
```

```
    file.add(open);
    file.add(save);
    file.add(exit);
    bar.add(file);
    setJMenuBar(bar);

    newFile.addActionListener(this);
    open.addActionListener(this);
    save.addActionListener(this);
    exit.addActionListener(this);

    setTitle("Simple Notepad");
    setSize(500, 400);
    setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    setVisible(true);
}

public void actionPerformed(ActionEvent e) {
    try {
        if (e.getSource() == newFile) {
            textArea.setText("");
        }

        else if (e.getSource() == open) {
            JFileChooser fc = new JFileChooser();

            if (fc.showOpenDialog(this) == JFileChooser.APPROVE_OPTION) {
                BufferedReader br = new BufferedReader(
                        new FileReader(fc.getSelectedFile()));

                textArea.setText("");
                String line;

                while ((line = br.readLine()) != null)
                    textArea.append(line + "\n");

                br.close();
            }
        }

        else if (e.getSource() == save) {
            JFileChooser fc = new JFileChooser();

            if (fc.showSaveDialog(this) == JFileChooser.APPROVE_OPTION) {
```

```
                FileWriter fw = new FileWriter(fc.getSelectedFile());
                fw.write(textArea.getText());
                fw.close();


                JOptionPane.showMessageDialog(this,
                        "File saved successfully.");
            }
        }

        else if (e.getSource() == exit) {
            System.exit(0);
        }

    } catch (IOException ex) {
        JOptionPane.showMessageDialog(this, "File Error");
    }
  }

  public static void main(String[] args) {
    new Main();
  }
}
```

OUTPUT:

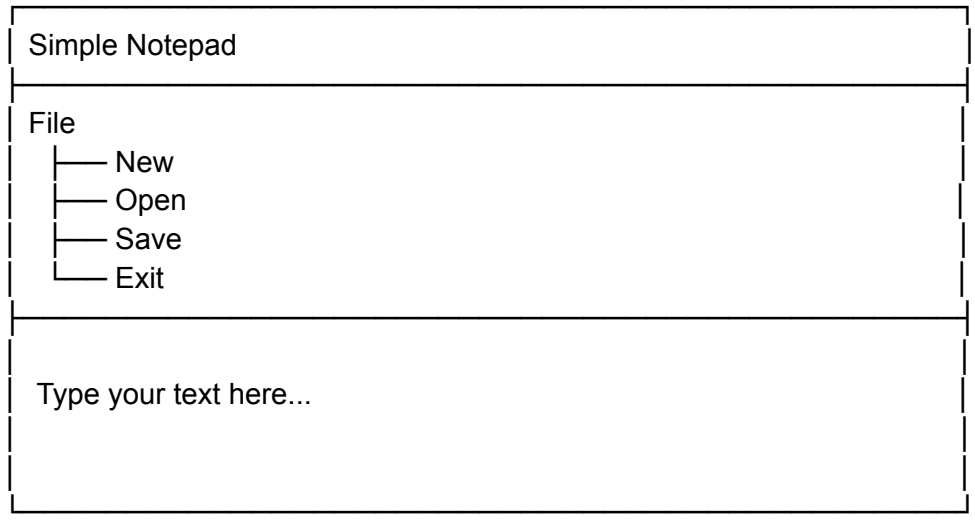

Q9. Student Feedback Form — Swing
Create a Swing Student Feedback Form with Student Name, Roll Number, Course, rating radio buttons (Excellent, Very Good, Good, Average, Poor), feedback checkboxes (Teaching, Laboratory, Course Material, Assignments), Comments JTextArea, Submit and Reset. Submit should display all feedback using JOptionPane.
Concepts: Swing components, JRadioButton, JCheckBox, JTextArea, JOptionPane, event handling.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
    JTextField name, roll, course;
    JRadioButton excellent, veryGood, good, average, poor;
    JCheckBox teaching, lab, material, assignments;
    JTextArea comments;
    JButton submit, reset;

    Main() {
        setLayout(new FlowLayout());

        add(new JLabel("Student Name:"));
        name = new JTextField(15);
        add(name);

        add(new JLabel("Roll Number:"));
        roll = new JTextField(15);
        add(roll);

        add(new JLabel("Course:"));
        course = new JTextField(15);
        add(course);

        add(new JLabel("Rating:"));
        excellent = new JRadioButton("Excellent");
        veryGood = new JRadioButton("Very Good");
        good = new JRadioButton("Good");
        average = new JRadioButton("Average");
        poor = new JRadioButton("Poor");

        ButtonGroup bg = new ButtonGroup();
        bg.add(excellent); bg.add(veryGood); bg.add(good);
```

```
    bg.add(average); bg.add(poor);

    add(excellent); add(veryGood); add(good);
    add(average); add(poor);

    add(new JLabel("Feedback:"));
    teaching = new JCheckBox("Teaching");
    lab = new JCheckBox("Laboratory");
    material = new JCheckBox("Course Material");
    assignments = new JCheckBox("Assignments");

    add(teaching); add(lab);
    add(material); add(assignments);

    add(new JLabel("Comments:"));
    comments = new JTextArea(4, 20);
    add(new JScrollPane(comments));

    submit = new JButton("Submit");
    reset = new JButton("Reset");
    add(submit); add(reset);

    submit.addActionListener(this);
    reset.addActionListener(this);

    setTitle("Student Feedback Form");
    setSize(400, 450);
    setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    setVisible(true);
}

public void actionPerformed(ActionEvent e) {
    if (e.getSource() == submit) {
        String rating = "";

        if (excellent.isSelected()) rating = "Excellent";
        else if (veryGood.isSelected()) rating = "Very Good";
        else if (good.isSelected()) rating = "Good";
        else if (average.isSelected()) rating = "Average";
        else if (poor.isSelected()) rating = "Poor";

        String feedback = "";
        if (teaching.isSelected()) feedback += "Teaching ";
        if (lab.isSelected()) feedback += "Laboratory ";
```

```
            if (material.isSelected()) feedback += "Course Material ";
            if (assignments.isSelected()) feedback += "Assignments";

            JOptionPane.showMessageDialog(this,
                "Name: " + name.getText() +
                "\nRoll No: " + roll.getText() +
                "\nCourse: " + course.getText() +
                "\nRating: " + rating +
                "\nFeedback: " + feedback +
                "\nComments: " + comments.getText());

        } else {
            name.setText("");
            roll.setText("");
            course.setText("");
            comments.setText("");

            excellent.setSelected(false);
            veryGood.setSelected(false);
            good.setSelected(false);
            average.setSelected(false);
            poor.setSelected(false);

            teaching.setSelected(false);
            lab.setSelected(false);
            material.setSelected(false);
            assignments.setSelected(false);
        }
    }

    public static void main(String[] args) {
        new Main();
    }
}
```

OUTPUT:
Student Feedback Form

Student Name: Sumit
Roll Number: 101
Course: BCA

Rating:
☑ Excellent ☐ Very Good ☐ Good

☐ Average ☐ Poor

Feedback:
☑ Teaching
☑ Laboratory
☐ Course Material
☑ Assignments

Comments:
Good teaching and practical sessions.

After clicking **Submit**:

Name: Sumit
Roll No: 101
Course: BCA
Rating: Excellent
Feedback: Teaching Laboratory Assignments
Comments: Good teaching and practical sessions.

Q10. Mini Banking GUI Application — Swing
Create a Swing Mini Banking Application with Account Number, Customer Name, Current Balance, Amount and buttons Deposit, Withdraw, Check Balance and Clear. Deposit adds amount; Withdraw subtracts it only when sufficient balance exists; Check Balance displays balance; Clear clears inputs. Use JOptionPane for messages.
Concepts: JFrame, JLabel, JTextField, JButton, JOptionPane, event handling, input validation, GUI-based application logic.

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;

public class Main extends JFrame implements ActionListener {
    JTextField account, name, balance, amount;
    JButton deposit, withdraw, check, clear;

    Main() {
        setLayout(new FlowLayout());

        add(new JLabel("Account Number:"));
```

```
    account = new JTextField(15);
    add(account);

    add(new JLabel("Customer Name:"));
    name = new JTextField(15);
    add(name);

    add(new JLabel("Current Balance:"));
    balance = new JTextField(15);
    add(balance);

    add(new JLabel("Amount:"));
    amount = new JTextField(15);
    add(amount);

    deposit = new JButton("Deposit");
    withdraw = new JButton("Withdraw");
    check = new JButton("Check Balance");
    clear = new JButton("Clear");

    add(deposit);
    add(withdraw);
    add(check);
    add(clear);

    deposit.addActionListener(this);
    withdraw.addActionListener(this);
    check.addActionListener(this);
    clear.addActionListener(this);

    setTitle("Mini Banking Application");
    setSize(350, 300);
    setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    setVisible(true);
}

public void actionPerformed(ActionEvent e) {
    try {
        if (e.getSource() == deposit) {
            double b = Double.parseDouble(balance.getText());
            double a = Double.parseDouble(amount.getText());

            if (a <= 0) {
                JOptionPane.showMessageDialog(this, "Invalid Amount");
```

```
                return;
            }

            balance.setText(String.valueOf(b + a));
            JOptionPane.showMessageDialog(this, "Amount Deposited");

        } else if (e.getSource() == withdraw) {
            double b = Double.parseDouble(balance.getText());
            double a = Double.parseDouble(amount.getText());

            if (a <= 0 || a > b) {
                JOptionPane.showMessageDialog(this,
                        "Insufficient Balance");
            } else {
                balance.setText(String.valueOf(b - a));
                JOptionPane.showMessageDialog(this,
                        "Amount Withdrawn");
            }


        } else if (e.getSource() == check) {
            JOptionPane.showMessageDialog(this,
                    "Current Balance: " + balance.getText());


        } else {
            account.setText("");
            name.setText("");
            balance.setText("");
            amount.setText("");
        }

      } catch (NumberFormatException ex) {
          JOptionPane.showMessageDialog(this,
                  "Enter valid numeric values");
      }
   }

   public static void main(String[] args) {
      new Main();
   }
}
```

OUTPUT:



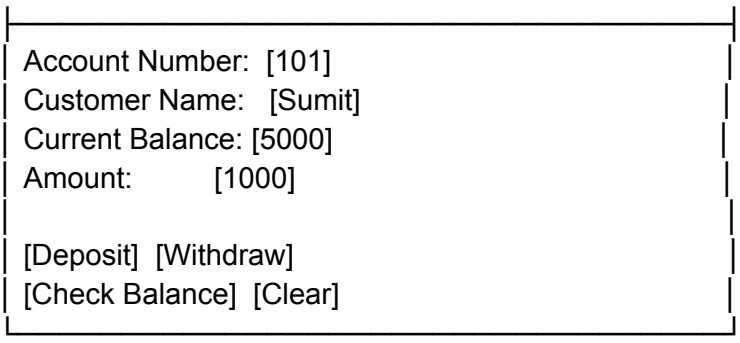
Account Number: [101]
Customer Name: [Sumit]
Current Balance: [5000]
Amount: [1000]
[Deposit] [Withdraw]
[Check Balance] [Clear]