

Cisco CCNA Security

Exam 210-260

Implementing Cisco Network Security

Questions No. 1
Refer to the exhibit.

```
tacacs server tacacs1  
  address ipv4 1.1.1.1  
  timeout 20  
  single-connection
```

```
tacacs server tacacs2  
  address ipv4 2.2.2.2  
  timeout 20  
  single-connection
```

```
tacacs server tacacs3  
  address ipv4 3.3.3.3  
  timeout 20  
  single-connection
```

Which statement about the given configuration is true?

- A. The single-connection command causes the device to establish one connection for all TACACS transactions.
- B. The single-connection command causes the device to process one TACACS request and then move to the next server.
- C. The timeout command causes the device to move to the next server after 20 seconds of TACACS inactivity.
- D. The router communicates with the NAS on the default port, TCP 1645

Answer: A

نلاحظ من الـ output انه في كل احدى الـ Tacacs server (Single-connection) اي ان الجهاز سوف يكون Single-connection الى كل Tacacs server

Refer to the exhibit.

While troubleshooting site-to-site VPN, you issued the `show crypto isakmp sa` command. What does the given output show?

- Answer: A**

10.10.10.2 / 10.1.1.5 *sw1* / *sw2* Inter Phase 1 *sw1* *sw2* Conn-id 1100

In which two situations should you use in-band management? (Choose two.)

- Answer: A,B

ان ال In-band management يعني انه يستخدم نفس الشبكه او خطها
لنقل ال ssh او telnet من داخل الشبكة او خارجها

Concurrent $\rightarrow$ $\begin{matrix} \text{critical} \\ \text{section} \end{matrix}$ $\leftarrow$ $\begin{matrix} \text{critical} \\ \text{section} \end{matrix}$

Question No : 4

Which type of PVLAN port allows a host in the same VLAN to communicate only with promiscuous hosts?

- A. Community host in the PVLAN
- B. Isolated host in the PVLAN
- C. Promiscuous host in the PVLAN
- D. Span for host in the PVLAN

Answer: B

- Isolated host in the PVLAN

Question No : 5

Which type of layer 2 attack enables the attacker to intercept traffic that is intended for one specific recipient?

- A. BPDU attack
- B. DHCP Starvation
- C. CAM table overflow
- D. MAC address spoofing

Answer: D

کے لئے ان کے MAC address spoofing کے ذریعے ان کے MAC address سے
جو وہ client کے لئے ہے۔ وہ client کے لئے ہے۔
client کے لئے ہے۔

Question No : 6

Which command initializes a lawful intercept view?

- A. username cisco1 view lawful-intercept password cisco
- B. parser view cisco li-view
- C. li-view cisco user cisco1 password cisco
- D. parser view li-view inclusive

Answer: C

لعمل lawful intercept view في المودم

```
#li-view li-password user username password password
```

أو it will be

```
li-view cisco user cisco1 password cisco
```

Question No : 7

In which stage of an attack does the attacker discover devices on a target network?

- A. Reconnaissance
- B. Covering tracks
- C. Gaining access
- D. Maintaining access

Answer: A

Reconnaissance - هو discovery process لاستخدام الخيارات

معلومات عن الشبكة - حيث ان هذا البحث ممكن ان يتم من خلال معرفة
معلومات عند ال IP addresses للاجهزة المتصلة بالشبكة ويمكن ان تجيب
وايضا ممكن معرفة ال Ports التي تكون مفتوحة في هذا الجهاز

Question No : 8

You want to allow all of your company's users to access the Internet without allowing other Web servers to collect the IP addresses of individual users. What two solutions can you use? (Choose two).

- A. Configure a proxy server to hide users' local IP addresses.
- B. Assign unique IP addresses to all users.
- C. Assign the same IP address to all users.
- D. Install a Web content filter to hide users' local IP addresses.
- E. Configure a firewall to use Port Address Translation.

Answer: A,E

لحل المشكلة من IP addresses التي قد تجمعها web servers نحتاج إلى
أ. Proxy server - وهو Server يعمل كـ Software أو hardware
التي تدير Requests إلى client وإلى servers
ب. Firewall و PAT لتغيير traffic

Question No : 9

When a company puts a security policy in place, what is the effect on the company's business?

- A. Minimizing risk
- B. Minimizing total cost of ownership
- C. Minimizing liability
- D. Maximizing compliance

Answer: A

إن security policy تساعد على تقليل المخاطر

Question No : 10

In a security context, which action can you take to address compliance?

- A. Implement rules to prevent a vulnerability.
- B. Correct or counteract a vulnerability.
- C. Reduce the severity of a vulnerability.
- D. Follow directions from the security appliance manufacturer to remediate a vulnerability.

Answer: A

ان ال Compliance يعني تطبيق ال security policy على الشبكة والقاية
الاساسية من تجنب الاختراقات والثغور.

Q# what do you do when you have a network object or
group and want to use an IP address

Dynamic NAT

Question No : 11

Which two NAT types allows only objects or groups to reference an IP address? (choose two)

- A. dynamic NAT
- B. dynamic PAT
- C. static NAT
- D. identity NAT

Answer: A,C

في ال dynamic NAT او static NAT نحدد مجموعة او IP واحد لكي يترجم
ال التي IP address او static NAT الى IP address في ال dynamic NAT

dynamic NAT

- dynamic NAT
- static NAT

Question No : 12

In which configuration mode do you configure the *ip ospf authentication-key 1* command?

- A. Interface
- B. routing process
- C. global
- D. privileged

Answer: A

R(conf-if)# ip ospf authentication-key 1

test

A

A ← Correct

Question No : 13

Which IOS command do you enter to test authentication against a AAA server?

- A. dialer aaa suffix <suffix> password <password>
- B. ppp authentication chap pap test
- C. aaa authentication enable default test group tacacs+
- D. test aaa-server authentication dialergroup username <user> password.

Answer: D

test aaa-server authentication dialergroup username <user> password

password & username dialer ip test dialer group in test ip test
aaa server line authentication ip test

test

D ← Correct

Question No : 14
Refer to the exhibit.

```
Router#show crypto ipsec sa
interface: FastEthernet0
Crypto map tag: SM_OMAP_1, local addr 172.17.1.1
protected vrf: (none)
local ident (addr/mask/prot/port): (10.40.20.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.50.30.0/255.255.255.0/0/0)
current_peer 192.168.1.1 port 500
PERMIT, flags={origin_is_acl,}

#pkts encaps: 68, #pkts encrypt: 68, #pkts digest: 68
#pkts decaps: 0, #pkts decrypt: 0, #pkts verify: 0
```

For which reason is the tunnel unable to pass traffic?

- A. UDP port 500 is blocked.
- B. The IP address of the remote peer is incorrect.
- C. The tunnel is failing to receive traffic from the remote peer.
- D. The local peer is unable to encrypt the traffic.

Answer: C

من السهل الاشارة الى ان tunnel لا يتلقى traffic من remote peer

Question No : 15

Which three statements are characteristics of DHCP Spoofing? (choose three)


- A. Arp Poisoning
- B. Modify Traffic in transit
- C. Used to perform man-in-the-middle attack
- D. Physically modify the network gateway
- E. Protect the identity of the attacker by masking the DHCP address
- F. can access most network devices

Answer: A,B,C

تغييرات في الـ DHCP address
(B,C,E)

DHCP Spoofing

- ARP poisoning
- modify traffic in transit
- used to perform man-in-the-middle attack

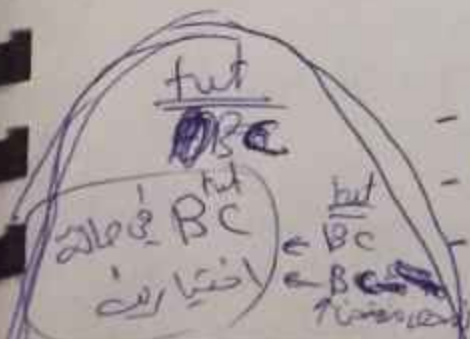

Question No : 16

What hash type does Cisco use to validate the integrity of downloaded images?

- A. Sha1
- B. Sha2
- C. Md5
- D. Md1

Answer: C

- MD5

Question No : 17

Refer to the exhibit.

dst	src	state	conn-id	slot
10.10.10.2	10.1.1.5	MM_NO_STATE	1	0

While troubleshooting site-to-site VPN, you issued the show crypto isakmp sa command. What does the given output show?

- A. IKE Phase 1 main mode was created on 10.1.1.5, but it failed to negotiate with 10.10.10.2.
- B. IKE Phase 1 main mode has successfully negotiated between 10.1.1.5 and 10.10.10.2.
- C. IKE Phase 1 aggressive mode was created on 10.1.1.5, but it failed to negotiate with 10.10.10.2.
- D. IKE Phase 1 aggressive mode has successfully negotiated between 10.1.1.5 and 10.10.10.2.

Answer: A

من الرسم تلاحظ انه phase 1 ولم انشاء في 10.1.1.5 لم ينجح
ب 10.10.10.2 لكن عملية المفاوضات فشلت

Internet Key Exchange (IKE) - هو بروتوكول وضعت لتبادل policy
والمعلومات negotiation بين الراوترات وتبين الجهة الاخرى بالحدودات المتفق
والauthenticating وذلك لكي يحدد الراوترات من نفس البروتوكولات

Question No : 18

What configure mode you used for the command `ip ospf authentication-key cisco`?

- A. global
B. privileged
C. in-line
D. Interface

Answer: D

$$\frac{\text{Int}}{D}$$

Question 12

In which configuration mode do you configure the IP ospf authentication-key command

- A - Interface
- B - Routing process
- C - global
- D - Privileged

$$\frac{\text{fund}}{A}$$

Answer :- A

Question No : 19

Which option is a characteristic of the RADIUS protocol?

- A. uses TCP
- B. offers multiprotocol support
- C. combines authentication and authorization in one process
- D. supports bi-directional challenge

Answer: C

authentication ~~process~~ RADIUS ~~process~~ authorization
 وال ~~process~~ authorization

Question No : 20

Which of the following statements about access lists are true? (Choose three.)

- A. Extended access lists should be placed as near as possible to the destination
- B. Extended access lists should be placed as near as possible to the source
- C. Standard access lists should be placed as near as possible to the destination
- D. Standard access lists should be placed as near as possible to the source
- E. Standard access lists filter on the source address
- F. Standard access lists filter on the destination address

Answer: B,C,E

Extended Acl - (X) تكون قريبة من ال Source
Standard Acl - تكون قريبة من ال destination
Standard Acl - تصفية ال Source address كمن ال packet
ال filtering ال ال Source address ال packet

Question No : 21

Which description of the nonsecret numbers that are used to start a Diffie-Hellman exchange is true?

- A. They are large pseudorandom numbers.
- B. They are very small numbers chosen from a table of known values
- C. They are numeric values extracted from hashed system hostnames.
- D. They are preconfigured prime integers

Answer: D

they are preconfigured prime integers

Question No : 22

What is a valid implicit permit rule for traffic that is traversing the ASA firewall?


- A. ARPs in both directions are permitted in transparent mode only.
- B. Unicast IPv4 traffic from a higher security interface to a lower security interface is permitted in routed mode only.
- C. Unicast IPv6 traffic from a higher security interface to a lower security interface is permitted in transparent mode only.
- D. Only BPDUs from a higher security interface to a lower security interface are permitted in transparent mode.
- E. Only BPDUs from a higher security interface to a lower security interface are permitted in routed mode.

Answer: A

أن الـ ARPs يسمح لها بالمرور في الـ Firewall بس في الوضع الشفاف فقط
في حالة كان الـ Firewall بحالة transparent mode فقط

Question No : 23

Refer to the exhibit.

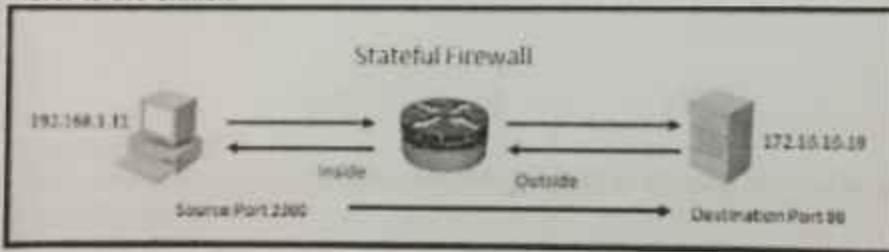

Using a stateful packet firewall and given an inside ACL entry of permit ip 192.16.1.0 0.0.0.255 any, what would be the resulting dynamically configured ACL for the return traffic on the outside ACL?

- A. permit tcp host 172.16.16.10 eq 80 host 192.168.1.11 eq 2300
- B. permit ip 172.16.16.10 eq 80 192.168.1.0 0.0.0.255 eq 2300
- C. permit tcp any eq 80 host 192.168.1.11 eq 2300
- D. permit ip host 172.16.16.10 eq 80 host 192.168.1.0 0.0.0.255 eq 2300

Answer: A

في الـ intercept سوف يتم السماح للسيرف فقط الـ PC كجواب الـ request وتكون كالآتي
permit tcp host 172.16.16.10 eq 80 host 192.168.1.11 eq 2300

Question No : 24

which port should (or would) be open if VPN NAT-T was enabled

- A. port 500
- B. port 500 outside interface
- C. port 4500 outside interface
- D. port 4500 ipsec

Answer: D

ان ال [port 4500 Ipsec] يجب ان يكون مفتوح عند تفعيل ال VPN NAT-T

conceal → اخفاء

Question No : 25

What command could you implement in the firewall to conceal internal IP address?

- A. no source-route
- B. no broadcast...
- C. no proxy-arp

Answer: C

- No proxyarp

اخت
ع → 4500

Question No : 26

Which aaa accounting command is used to enable logging of the start and stop records for user terminal sessions on the router?

- A. aaa accounting network start-stop tacacs+
- B. aaa accounting system start-stop tacacs+
- C. aaa accounting exec start-stop tacacs+
- D. aaa accounting connection start-stop tacacs+
- E. aaa accounting commands 15 start-stop tacacs+

Answer: C

aaa accounting exec start-stop tacacs+

fact
C
C ← correct

Question No : 27

Which quantifiable item should you consider when your organization adopts new technologies?

- A. threats
- B. vulnerability
- C. risk
- D. exploits

Answer: C

Risk

fact
C
C

Question No : 28

Which type of IPS can identify worms that are propagating in a network?

- A. Policy-based IPS
- B. Anomaly-based IPS
- C. Reputation-based IPS
- D. Signature-based IPS

Answer: B

Anomaly-based IPS



Question No : 29

Which prevent the company data from modification even when the data is in transit?

- A. Confidentiality
- B. Integrity
- C. Availability

Answer: B

Integrity هي التي تمنع من تعديل البيانات أثناء انتقالها
من المصدر إلى الوجهة

Question No : 30

Protocols supported in context aware VRF over VRF lite? (Choose Two)

- A. EIGRP
- B. Multicast
- C. CGR

Answer: A,B

ان الـ VRF over VRF lite تدعم الـ

- EIGRP
- Multicast

تحت
AB

Question No : 31

Which two next-generation encryption algorithms does Cisco recommend? (Choose two.)

- A. AES
- B. 3DES
- C. DES
- D. MD5
- E. DH-1024
- F. SHA-384

Answer: A,F

ان Cisco تدعم الـ encryption الـ

- AES
- SHA-384

Question No : 32

What is one requirement for locking a wired or wireless device from ISE?

- A. The ISE agent must be installed on the device.
- B. The device must be connected to the network when the lock command is executed.
- C. The user must approve the locking action.
- D. The organization must implement an acceptable use policy allowing device locking.

Answer: A

Question No : 33

Which three ESP fields can be encrypted during transmission? (Choose three.)

- A. Security Parameter Index
- B. Sequence Number
- C. MAC Address
- D. Padding
- E. Pad Length
- F. Next Header

Answer: D,E,F

Which three ESP fields can be encrypted during transmission?
- Pad length
- next header

transmission encryption ESP fields

Which three ESP fields can be encrypted during transmission?
- Pad length
- next header

- Padding
- Pad length
- Next Header

Which three ESP fields can be encrypted during transmission?
- Pad length
- next header

Question No : 34

With which preprocessor do you detect incomplete TCP handshakes?

- A. rate based prevention
- B. portscan detection

Answer: A

Question what type of Diffie-Hellman group would you expect to be utilized on a wireless device?

- A - Group 4
- B - Group 7
- C - Group 6
- D - Group 3

- group 7

1st
B

Answer: B

Question No : 35

Which option is the default value for the Diffie-Hellman group when configuring a site-to-site VPN on an ASA device?

- A. Group 1
- B. Group 2
- C. Group 5
- D. Group 7

- group 2

1st
B ← correct

Answer: B

Question which of the Diffie-Hellman group are support by Cisco VPN product (choose all that apply)

- A - group 1
- B - group 2
- C - group 3
- D - group 5
- E - group 7
- F - group 8
- G - group 9

- group 1
- group 2
- group 5
- group 7

1st
ABDE
ABDE
ABDE

Question No : 36

Refer to the exhibit

```
Oct13 19:46:06.170: AAA/MEMORY: create_user (0x4C5E1F60) user='tecteam'  
ruser='NULL' ds0=0 port='tty515' rem_addr='10.0.2.13' authn_type=ASCII  
service=ENABLE priv=15 initial_task_id=0, vrf=(id=0)  
Oct13 19:46:06.170: AAA/AUTHEN/START (2600878790): port='tty515' list=  
action=LOGIN service=ENABLE  
Oct13 19:46:06.170: AAA/AUTHEN/START (2600878790): console enable - default to  
enable password (if any)  
Oct13 19:46:06.170: AAA/AUTHEN/START (2600878790): Method=ENABLE  
Oct13 19:46:06.170: AAA/AUTHEN (2600878790): status=GETPASS  
Oct13 19:46:07.266: AAA/AUTHEN/CONT (2600878790): continue_login  
(user='(undef)')  
Oct13 19:46:07.266: AAA/AUTHEN (2600878790): status=GETPASS  
Oct13 19:46:07.266: AAA/AUTHEN/CONT (2600878790): Method=ENABLE  
Oct13 19:46:07.266: AAA/AUTHEN (2600878790): password incorrect  
Oct13 19:46:07.266: AAA/AUTHEN (2600878790): status=FAIL  
Oct13 19:46:07.266: AAA/MEMORY: free_user (0x4C5E1F60) user='NULL'  
ruser='NULL' port='tty515' rem_addr='10.0.2.13' authn_type=ASCII service=ENABLE  
priv=15 vrf=(id=0)
```

Which statement about this output is true?

- A. The user logged into the router with the incorrect username and password.
- B. The login failed because there was no default enable password.
- C. The login failed because the password entered was incorrect.
- D. The user logged in and was given privilege level 15.

Answer: C

فشل الوصول بسبب ان ال password خطأ

Question No : 37

What are two challenges faced when deploying host-level IPS? (Choose Two)

- A. The deployment must support multiple operating systems.
- B. It does not provide protection for offsite computers.
- C. It is unable to provide a complete network picture of an attack.
- D. It is unable to determine the outcome of every attack that it detects.
- E. It is unable to detect fragmentation attacks.

Answer: A, B

Answer AC

- the deployment must support multiple operating system
- ~~It does not provide protection for offsite computers.~~
- It is unable to provide a complete network picture of an attack

test
AC ← virus
AC
AC
AC

elke ~~some~~
AB

Question No : 38

In which three cases does the ASA firewall permit inbound HTTP GET requests during normal operations? (Choose three).

- A. when matching NAT entries are configured
- B. when matching ACL entries are configured
- C. when the firewall receives a SYN-ACK packet
- D. when the firewall receives a SYN packet
- E. when the firewall requires HTTP inspection
- F. when the firewall requires strict HTTP inspection

Answer: A, B, D

- when matching NAT entries are configured
- when matching ACL entries are configured
- when the firewall receives a SYN packet

elke (158, 174)

Question No : 39

Which three ESP fields can be encrypted during transmission? (Choose three.)

- A. Security Parameter Index
- B. Sequence Number
- C. MAC Address
- D. Padding
- E. Pad Length
- F. Next Header

Answer: D,E,F

~~Padding~~
~~Pad Length~~
~~Next Header~~

Question No : 40

Which two protocols enable Cisco Configuration Professional to pull IPS alerts from a Cisco ISR router? (Choose two.)

- A. syslog
- B. SDEE
- C. FTP
- D. TFTP
- E. SSH
- F. HTTPS

Answer: B,F

- SDEE
- HTTPS

but
B F

Question No : 41

Which type of encryption technology has the broadest platform support to protect operating systems?

- A. software
- B. hardware
- C. middleware
- D. file-level

Answer: A


-Software

Question No : 42

Which option is the most effective placement of an IPS device within the infrastructure?

- A. Inline, behind the internet router and firewall
- B. Inline, before the internet router and firewall
- C. Promiscuously, after the Internet router and before the firewall
- D. Promiscuously, before the Internet router and the firewall

Answer: A

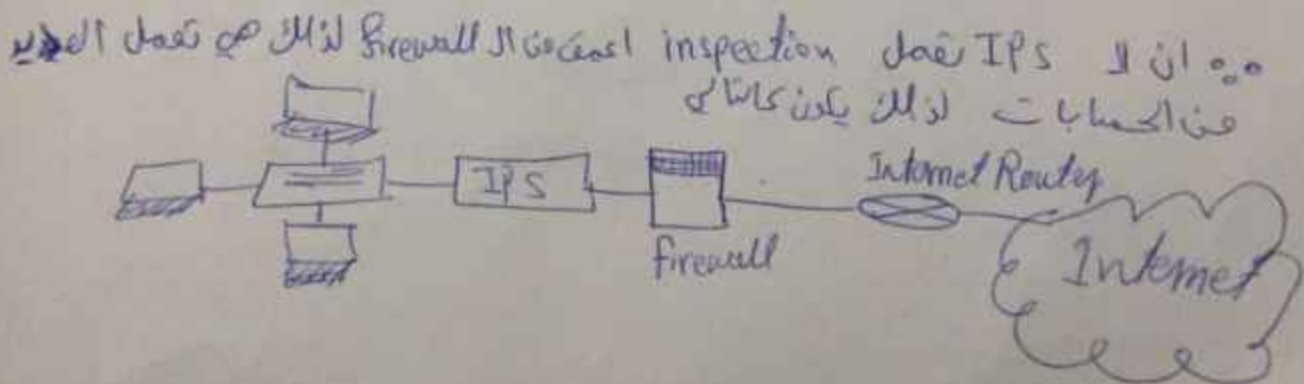

Question No : 43

An attacker installs a rogue switch that sends superior BPDUs on your network. What is a possible result of this activity?

- A. The switch could offer fake DHCP addresses.
- B. The switch could become the root bridge.
- C. The switch could be allowed to join the VTP domain.
- D. The switch could become a transparent bridge.

Answer: B

فبإمكان switch أن يصبح
superior BPDUs فأنه لن يكون
root bridge

Question No : 44

Which two devices are components of the BYOD architectural framework?

- A. Prime Infrastructure
- B. Nexus 7010 Switch
- C. Cisco 3945 Router
- D. Wireless Access Points
- E. Identity Services Engine

Answer: A,E

BYOD (Bring your own device) components
- Prime infrastructure
- Identity services engine

تحت
A E

Question No : 45

Which two characteristics apply to an Intrusion Prevention System (IPS) ? (Choose two)

- A. Does not add delay to the original traffic.
- B. Cabled directly inline with the flow of the network traffic.
- C. Can drop traffic based on a set of rules.
- D. Runs in promiscuous mode.
- E. Cannot drop the packet on its own

Answer: B,C

characteristics of IPS

- cabled directly inline with the flow of the network traffic
- can drop traffic based on a set of rules

Int
BC ← Cisco
BC

Question No : 46

What configuration allows AnyConnect to automatically establish a VPN session when a user logs in to the computer?

- A. always-on
- B. proxy
- C. transparent mode
- D. Trusted Network Detection

Answer: A

always-on allows anyconnect to automatically establish a VPN when a user logs in the computer.


Question No : 47

When is the default deny all policy an exception in zone-based firewalls?

- A. When traffic traverses two interfaces in the same zone
- B. When traffic terminates on the router via the self zone
- C. When traffic sources from the router via the self zone
- D. When traffic traverses two interfaces in different zones

Answer: A

*) كذا يعني ان traffic ال interface ال interface ال
في نفس ال zone ال فانه لا يطبق Policy ال
وال permit traffic ال ip

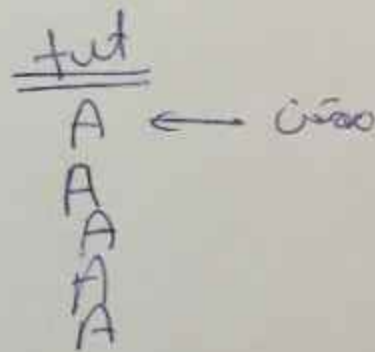

Question No : 48


With which technology do apply integrity, confidentiality and authenticate the source

- A. IPSec
- B. IKE
- C. Certificate authority
- D. Data encryption standards

Answer: A

- Integrity
- Confidentiality
- authentication

ان ال Ipsec ال



Question No : 49

Which two authentication types does OSPF support? (Choose two.)

- A. plaintext
- B. MD5
- C. HMAC
- D. AES 256
- E. SHA-1
- F. DES

Answer: A,B

OSPF authentication types are ✕

- Plaintext
- MD5


Question No : 50

Which IPS mode provides the maximum number of actions?

- A. inline
- B. promiscuous
- C. span
- D. failover
- E. bypass

Answer: A

inline mode ✕



inline mode provides the maximum number of actions

Question No : 51

Which type of firewall can act on the behalf of the end device?

- A. Stateful packet
- B. Application
- C. Packet
- D. Proxy

Answer: D

ان ال application / proxy firewall يمكن ان تمثل ك client حيث تكون خلف ال Firewall. لذلك اذا حاول ال hacker واكتشف ثغرة في ال application فإنه سوف يظن ان ال proxy server (client) (end device) (pc)

Question No : 52

What is the primary purpose of a defined rule in an IPS?

- A. to configure an event action that takes place when a signature is triggered
- B. to define a set of actions that occur when a specific user logs in to the system
- C. to configure an event action that is pre-defined by the system administrator
- D. to detect internal attacks

Answer: A

ما هو الهدف من القواعد (التوقيعات) في ال IPS

- to configure an event action that takes place when a signature is triggered

Question No : 53

Which type of Layer 2 attack can you "do something" for one host:

- A. MAC spoofing
- B. CAM overflow....

Answer: A

صحيح ان يكون في السؤال ما هو نوع ال attack الذي يستهدف host معين

- MAC spoofing

Question No : 54

Which Sourcefire logging action should you choose to record the most detail about a connection?

- A. Enable logging at the end of the session.
- B. Enable logging at the beginning of the session.
- C. Enable alerts via SNMP to log events off-box.
- D. Enable eStreamer to log events off-box.

Answer: A

- Enable logging at the end of the session

Question No : 55

In which type of attack does an attacker send email messages that ask the recipient to click a link such as <https://www.cisco.net.cc/securelogin?>

- A. phishing
- B. pharming
- C. solicitation
- D. secure transaction

Answer: A

- phishing

Question No : 56

Which sensor mode can deny attackers inline?

- A. IPS
- B. fail-close
- C. IDS
- D. fail-open

Answer: A

- IPS

Question No : 58

Which statement about IOS privilege levels is true?

- A. Each privilege level supports the commands at its own level and all levels below it.
- B. Each privilege level supports the commands at its own level and all levels above it.
- C. Privilege-level commands are set explicitly for each user.
- D. Each privilege level is independent of all other privilege levels.

Answer: A

- Each privilege level supports the commands at its own level and all levels below it.

Question No : 59

In which three ways does the RADIUS protocol differ from TACACS? (Choose three.)

- A. RADIUS uses UDP to communicate with the NAS.
- B. RADIUS encrypts only the password field in an authentication packet.
- C. RADIUS authenticates and authorizes simultaneously, causing fewer packets to be transmitted.
- D. RADIUS uses TCP to communicate with the NAS.
- E. RADIUS can encrypt the entire packet that is sent to the NAS.
- F. RADIUS supports per-command authorization.

Answer: A,B,C

- RADIUS uses UDP to communicate with the NAS
- RADIUS encrypts only the password field in authentication packet
- RADIUS authenticates and authorizes simultaneously, causing fewer packets to be transmitted.

Question No : 60

What VPN feature allows traffic to exit the security appliance through the same interface it entered?

- A. hairpinning
- B. NAT
- C. NAT traversal
- D. split tunneling

Answer: A

ان ال hair-pinning يسمح لا traffic من الخروج عن نفس ال interface الذي دخل منه

Question No : 61

Which feature of the Cisco Email Security Appliance can mitigate the impact of snowshoe spam and sophisticated phishing attacks?

- A. contextual analysis
- B. holistic understanding of threats
- C. graymail management and filtering
- D. signature-based IPS

Answer: A

- contextual analysis

fat
A ← was

Question No : 62

Diffie-Hellman key exchange question

A. IKE

Answer: A

- IKE

Question No : 63

Which NAT option is executed first during in case of multiple nat translations?

- A. dynamic nat with shortest prefix
- B. dynamic nat with longest prefix
- C. static nat with shortest prefix
- D. static nat with longest prefix

Answer: D

في حالة وجود عدة أنواع NAT، ما الذي يتم تنفيذه أولاً؟
- Static NAT with longest prefix

penetration → اختراق

Question No : 64

How can you detect a false negative on an IPS?

- A. View the alert on the IPS.
- B. Review the IPS log.
- C. Review the IPS console.
- D. Use a third-party system to perform penetration testing.
- E. Use a third-party to audit the next-generation firewall rules.

Answer: D

False negative :- وهو ان يكون هناك attack ولكن الانذار لا ياتي لا IPS لم يستغل اي ان IPS لم يكتشف هذا ال attack

الحل فيه امكن ان نضع third-party او جهاز خارجي
SNMP لتجميع مراقبة ال traffic وتساعد الانذار في حالة
وصول اي attack

Question No : 65

The command debug crypto isakmp results in ?

- A. Troubleshooting ISAKMP (Phase 1) negotiation problems

Answer: A

Question No : 66

Which tool can an attacker use to attempt a DDoS attack?

- A. botnet
- B. Trojan horse
- C. virus
- D. adware

Answer: A

- botnet used for DDoS attack

Question No : 67

Which protocols use encryption to protect the confidentiality of data transmitted between two parties? (Choose two.)

- A. FTP
- B. SSH
- C. Telnet
- D. AAA
- E. HTTPS
- F. HTTP

Answer: B, E

- SSH
- HTTPS

firepower is kind of firewall

Question No : 68

Which firepower preprocessor block traffic based on IP?

- A. Signature-Based
- B. Policy-Based
- C. Anomaly-Based
- D. Reputation-Based

Answer: D

ASA firepower traffic filter is based on Reputation-Based always IP address conditions

test
D ← is it
D

Question No : 69

You have been tasked with blocking user access to websites that violate company policy, but the sites use dynamic IP addresses. What is the best practice for URL filtering to solve the problem?

- A. Enable URL filtering and use URL categorization to block the websites that violate company policy.
- B. Enable URL filtering and create a blacklist to block the websites that violate company policy.
- C. Enable URL filtering and create a whitelist to block the websites that violate company policy.
- D. Enable URL filtering and use URL categorization to allow only the websites that company policy allows users to access.
- E. Enable URL filtering and create a whitelist to allow only the websites that company policy allows users to access.

Answer: A

- Enable URL filtering and use URL categorization to block the websites that Violate company policy

test
A ← is it
A

Question No : 70

Which three options are common examples of AAA implementation on Cisco routers? (Choose three.)

- A. authenticating remote users who are accessing the corporate LAN through IPsec VPN connections
- B. authenticating administrator access to the router console port, auxiliary port, and vty ports
- C. implementing PKI to authenticate and authorize IPsec VPN peers using digital certificates
- D. tracking Cisco NetFlow accounting statistics
- E. securing the router by locking down all unused services
- F. performing router commands authorization using TACACS+

Answer: A,B,F

- authenticating remote users who are ~~accessing~~ ^{accessing} the corporate LAN through IPsec VPN connections
- authenticating administrator access to the router console port, auxiliary port, and vty ports
- performing router commands authorization using TACACS+

Question No : 72

Which command verifies phase 1 of an IPsec VPN on a Cisco router?

- A. show crypto map
- B. show crypto ipsec sa
- C. show crypto isakmp sa
- D. show crypto engine connection active

Answer: C

IPsec VPN is phase 1 & 2
R# show crypto isakmp sa

show crypto isakmp sa ← phase 1
show crypto ipsec sa ← phase 2

Question No : 73
Refer to the exhibit.

```
current_peer: 10.1.1.5
  PERMIT, flags={origin_is_acl,}
    #pkts encaps: 1205, #pkts encrypt: 1205, #pkts digest 1205
    #pkts decaps: 1168, #pkts decrypt: 1168, #pkts verify 1168
    #pkts compressed: 0, #pkts decompressed: 0
    #pkts not compressed: 0, #pkts compr. failed: 0,
    #pkts decompress failed: 0, #send errors 0, #recv errors 0
    local crypto endpt.: 10.1.1.1, remote crypto endpt.: 10.1.1.5
```

While troubleshooting site-to-site VPN, you issued the show crypto ipsec sa command. What does the given output show?

- A. IPSec Phase 2 is established between 10.1.1.1 and 10.1.1.5.
- B. ISAKMP security associations are established between 10.1.1.5 and 10.1.1.1.
- C. IKE version 2 security associations are established between 10.1.1.1 and 10.1.1.5.
- D. IPSec Phase 2 is down due to a mismatch between encrypted and decrypted packets.

Answer: A

phase2 أليها Show crypto ipsec sa

بين remote crypto endpoint و Local crypto endpoint

10.1.1.5 و 10.1.1.1 بين IPSEC phase2

Question No : 74

Which type of address translation supports the initiation of communications bidirectionally?

- A. multi-session PAT
- B. static NAT
- C. dynamic PAT
- D. dynamic NAT

Answer: (D)

Answer B

ان ال Static NAT يعني الاتصال (translation) بين ال Host و ال Remote host .

$$\frac{f_{ut}}{B}$$

transparent model (order statistic ANOVA)

Question No : 75

Which two features are supported in a VRF-aware software infrastructure before VRF-lite? (Choose two)

which protocol supported in context aware VRF over VRF-lite?

- priority queuing
- ECMP
- weighted round robin
- weighted fair queuing

- A. priority queuing
- B. EIGRP
- C. multicast
- D. WCCP
- E. fair queuing

Answer: B,C

ان VRF سے

- EIGRP
- multicast

Question No : 76

What are the three layers of a hierarchical network design? (Choose three.)

- A. access
- B. core
- C. distribution
- D. user
- E. server
- F. Internet

Answer: A,B,C

- access layer
- distribution layer
- core layer

Question No : 77

Which two characteristics of the TACACS+ protocol are true? (Choose two.)

- A. uses UDP ports 1645 or 1812
- B. separates AAA functions
- C. encrypts the body of every packet
- D. offers extensive accounting capabilities
- E. is an open RFC standard protocol

Answer: B,C

- separates AAA functions
- encrypts the body of every packet

Question No : 78

Which two options are advantages of an application layer firewall? (Choose two.)

- A. provides high-performance filtering
- B. makes DoS attacks difficult
- C. supports a large number of applications
- D. authenticates devices
- E. authenticates individuals

Answer: B,E

Application inspection done application layer firewall in case of application layer

- makes DoS attack difficult

DoS attack via port and IP is not possible

- authenticates individuals

tut

BE

BE ← Gino

BE

Question No : 79

Which ports need to be active for AAA server and a Microsoft server to permit Active Directory authentication?

- A. 445 and 389
- B. 888 and 3389
- C. 636 and 4445
- D. 363 and 983

Answer: A

445 & 389 port no.

tut

A
A
A
A

← Gino

Question No : 80

Which source port does IKE use when NAT has been detected between two VPN gateways?

- A. TCP 4500
- B. TCP 500
- C. UDP 4500
- D. UDP 500

Answer: C

The encapsulation of IKE and ESP in UDP port 4500 enables these protocols to pass through a device or firewall performing NAT

Question No : 81

The Oakley cryptography protocol is compatible with following for managing security?

- A. IPSec
- B. ISAKMP
- C. Post security

Answer: B

— IKE is a protocol that implements the Oakley key exchange and work with ISAKMP

(Inside of the Internet Security Association and Key management protocol "ISAKMP")

Question No : 82

Which Cisco Security Manager application collects information about device status and uses it to generate notifications and alerts?

- A. FlexConfig
- B. Device Manager
- C. Report Manager
- D. Health and Performance Monitor

Answer: D

Health and Performance Monitor

هذا التطبيق يجمع معلومات عن حالة الأجهزة devices وينتج إشعارات
وإنذارات بناءً على هذه المعلومات السابقة

Question No : 84

Which feature allows a dynamic PAT pool to select the next address in the PAT pool instead of the next port of an existing address?

- A. next IP
- B. round robin
- C. dynamic rotation
- D. NAT address rotation

Answer: B

- Round Robin

Question No : 85

Which countermeasures can mitigate ARP spoofing attacks? (Choose two.)

- A. Port security
- B. DHCP snooping
- C. IP source guard
- D. Dynamic ARP inspection

Answer: B,D

ARP spoofing attack يمكن تجنبه بطريقتين

- DHCP snooping
- Dynamic ARP inspection

Question No : 86

Which IPS mode is less secure than other options but allows normal network throughput?


Question 86 :-

Which IPS mode is less secure than other options but allows optimal network throughput?

- A. promiscuous mode
- B. inline mode
- C. inline-bypass mode
- D. transparent mode.

Answer: A

کچھ ٹریفک ان ال promiscuous mode ہے جس میں IPS بہت کم محفوظ ہے

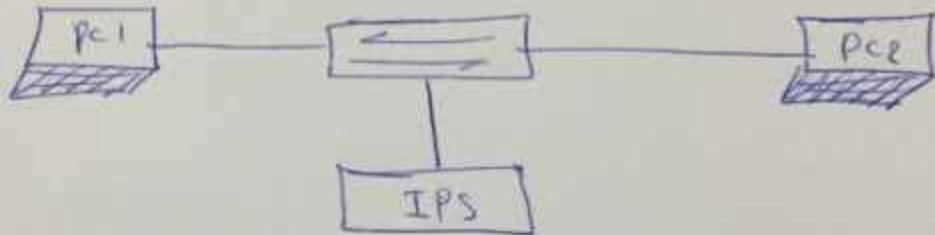

عن ال topology ٹریفک ان ال لین امن ولکنہ لا یجوز تھیل ال سیکرٹ
لا تھان سیکرٹ عن ال بیانات سیکرٹ لہذا وہ بہت کم محفوظ ہے ال data

tut
A
A

Question No : 87

Which wildcard mask is associated with a subnet mask of /27?

- A. 0.0.0.31
- B. 0.0.0.27
- C. 0.0.0.224
- D. 0.0.0.255

Answer: A

<u>Slash</u>	<u>Subnet/mask</u>	<u>Wildcard mask</u>
/27	255.255.255.224	0.0.0.31

Question No : 88

Which statement about a PVLAN isolated port configured on a switch is true?

- A. The isolated port can communicate only with the promiscuous port.
- B. The isolated port can communicate with other isolated ports and the promiscuous port.
- C. The isolated port can communicate only with community ports.
- D. The isolated port can communicate only with other isolated ports.

Answer: A

Promiscuous port کے ساتھ ان کے ساتھ
Isolated port کے ساتھ ان کے ساتھ
وال trunk ان کے ساتھ

Question No : 89

Which IDS/IPS solution can monitor system processes and resources?

- A. IDS
- B. HIPS
- C. PROXY
- D. IPS

Answer: B

- HIPS

Int
B
B ←
B

Question No : 90

In which type of attack does the attacker attempt to overload the CAM table on a switch so that the switch acts as a hub?

- A. MAC spoofing
- B. gratuitous ARP
- C. MAC flooding
- D. DoS

Answer: C

كما نعلم ان ال MAC Flooding هو attack حيث يقوم ال hacker بأغراق
ال switch بالكثير من ال packet وكل packet فيه source Macaddress
يختلف. لذلك يقوم ال switch بتسجيل هذه العناوين في ال CAM table
التي ان يستلزم وقت ثم يبدأ ال switch بوضع ال mac address القوي
و عندما يرسل ال user ال packet ال user امره فان ال switch قد وضع
ال mac address ال user بسبب اختلاف ال CAM table. لذلك ان ال switch
لا يعلم موقع ال port لهذا ال mac لذلك يتم ارساله الى كل ال ports في ال hub

Question No : 91

Which product can be used to provide application layer protection for TCP port 25 traffic?

- A. ESA
- B. CWS
- C. WSA
- D. ASA

Answer: A

- ESA

Question No : 92

Which statement about Cisco ACS authentication and authorization is true?

- A. ACS servers can be clustered to provide scalability.
- B. ACS can query multiple Active Directory domains.
- C. ACS uses TACACS to proxy other authentication servers.
- D. ACS can use only one authorization profile to allow or deny requests.

Answer: A

ال ACS servers يمكن ان تجمع ال authentication و ال authorization
لتوفر قابلية التوسع

Question No : 93

Which two authentication types does OSPF support? (Choose two.)

- A. plaintext
- B. MD5
- C. HMAC
- D. AES 256
- E. SHA-1
- F. DES

Answer: A,B

OSPF support two authentication types

- plaintext
- MD5

Question No : 94

Refer to the exhibit.

```
authentication event fail action next-method
authentication event no-response action authorize vlan 101
authentication order mab dot1x webauth
authentication priority dot1x mab
authentication port-control auto
dot1x pae authenticator
```

If a supplicant supplies incorrect credentials for all authentication methods configured on the switch, how will the switch respond?

- A. The supplicant will fail to advance beyond the webauth method.
- B. The switch will cycle through the configured authentication methods indefinitely.
- C. The authentication attempt will time out and the switch will place the port into the unauthorized state.
- D. The authentication attempt will time out and the switch will place the port into VLAN 101.

Answer: A

يقول طاقا يحدث في حالة فشلت كل عمليات authentication
 mab dot1x webauth الى انه لا يوجد down
 لذلك اذا كان ال user لا يمكنه ان ينجح في ال authentication
 الى ال webauth .

Question No : 95

What is an advantage of implementing a Trusted Platform Module for disk encryption?

- A. It provides hardware authentication.
- B. It allows the hard disk to be transferred to another device without requiring re-encryption.
- C. It supports a more complex encryption algorithm than other disk-encryption technologies.
- D. It can protect against single points of failure.

Answer: A

Trusted platform module کا مفہوم ان کی authentication / تصدیق

Question No : 96

Which three statements describe DHCP spoofing attacks? (Choose three.)

- A. They can modify traffic in transit.
- B. They are used to perform man-in-the-middle attacks.
- C. They use ARP poisoning.
- D. They can access most network devices.
- E. They protect the identity of the attacker by masking the DHCP address.
- F. They can physically modify the network gateway.

Answer: A,B,C

نفس سوال سابق
کامیابی کے لیے ان کے DHCP spoofing سے ان کے ہیکر DHCP کے لیے
ان کے ان کے PC کے IP address کی Subnet کو جاننا ہوگا۔ اور
ان کے ان کے IP address کی حالت کے Gateway کے لیے وہ ان کے
PC کے ان کے Internet اور ان کے ان کے لیے وہ ان کے
ان کے ان کے man-in-the-middle attack کے لیے وہ ان کے
ان کے ان کے PC کے لیے وہ ان کے

Question No : 97

What are purposes of the Internet Key Exchange in an IPsec VPN? (Choose two.)

- A. The Internet Key Exchange protocol establishes security associations
- B. The Internet Key Exchange protocol provides data confidentiality
- C. The Internet Key Exchange protocol provides replay detection
- D. The Internet Key Exchange protocol is responsible for mutual authentication

Answer: A,D

IKE protocol used to establish secured site-to-site VPN or remote access VPN and also used to negotiate for authentication

Question No : 98

What is the best way to confirm that AAA authentication is working properly?

- A. Use the test aaa command.
- B. Ping the NAS to confirm connectivity.
- C. Use the Cisco-recommended configuration for AAA authentication.
- D. Log into and out of the router, and then check the NAS authentication log.

Answer: A

to check if AAA authentication is working properly
(test aaa command) is used

test aaa-server authentication dialgroup username cisco password

test
A

Question No : 99
Refer to the exhibit.

```
crypto ipsec transform-set myset esp-md5-hmac esp-aes-256
```

What are two effects of the given command? (Choose two.)

- A. It configures authentication to use AES 256.
- B. It configures authentication to use MD5 HMAC.
- C. It configures authorization use AES 256.
- D. It configures encryption to use MD5 HMAC.
- E. It configures encryption to use AES 256.

Answer: B,E

authentication encryption
crypto ipsec transform-set myset esp-md5-hmac esp-aes-256

Question No : 100

You have implemented a Sourcefire IPS and configured it to block certain addresses utilizing Security Intelligence IP Address Reputation. A user calls and is not able to access a certain IP address. What action can you take to allow the user access to the IP address?

- A. Create a whitelist and add the appropriate IP address to allow the traffic.
- B. Create a custom blacklist to allow the traffic.
- C. Create a user based access control rule to allow the traffic.
- D. Create a network based access control rule to allow the traffic.
- E. Create a rule to bypass inspection to allow the traffic.

Answer: A

في حالة ان لم يستطع user بالوصول الى عناوين معينه
الوصول اليها يمكن ان تكون ~~blacklist~~
whitelist ونضع ال IP address ال user بها
لكي يتم السماح لهذا ال user بالوصول الى ال IP addresses

Question No : 101
Refer to the exhibit.

```
Username Engineer privilege 9 password 0 configure
Username Monitor privilege 8 password 0 watcher
Username HelpDesk privilege 6 password help
Privilege exec level 6 show running
Privilege exec level 7 show start-up
Privilege exec level 9 configure terminal
Privilege exec level 10 interface
```

Which line in this configuration prevents the HelpDesk user from modifying the interface configuration?

- A. Privilege exec level 9 configure terminal
- B. Privilege exec level 10 interface
- C. Username HelpDesk privilege 6 password help
- D. Privilege exec level 7 show start-up

test
A
A ← جواب
A

Answer: A

في الصورة اعلاه نلاحظ ان ال help desk user له Privilege level 6
نلاحظ ان ال user في ال Privilege level 6 يستطيع تنفيذ امر show running فقط
ولا يستطيع التعديل في ال interface. لذلك ان Privilege exec level 9 configure terminal
هو الذي يمنع ال help desk من التعديل في ال interface

Question No : 102

What IPSec mode is used to encrypt traffic between a server and VPN endpoint?

- A. tunnel
- B. Trunk
- C. Aggregated
- D. Quick
- E. Transport

Answer: E

- transport mode

test
E
E ← جواب
E

Question No : 103

When a switch has multiple links connected to a downstream switch, what is the first step that STP takes to prevent loops?

- A. STP elects the root bridge
- B. STP selects the root port
- C. STP selects the designated port
- D. STP blocks one of the ports

Answer: A



فصل 10 STP يانتخاب Root bridge و مينيميزه تعداد پورت ها
STP 100 block port, designated ports, root port

Question No : 104

Which two functions can SIEM provide? (Choose Two)

- A. Correlation between logs and events from multiple systems.
- B. event aggregation that allows for reduced log storage requirements.
- C. proactive malware analysis to block malicious traffic.
- D. dual-factor authentication.
- E. centralized firewall management.

Answer: A,C

- correlation between logs and events from multiple systems.
- Proactive malware analysis to block malicious traffic

تعداد
AC
AC

Question No : 105

What mechanism does asymmetric cryptography use to secure data?

- A. a public/private key pair
- B. shared secret keys
- C. an RSA nonce
- D. an MD5 hash

Answer: A

asymmetric cryptography uses public/private key pair
means one key for encryption and another key for decryption

Question No : 106

Which three statements about Cisco host-based IPS solutions are true? (Choose three.)

- A. It can view encrypted files.
- B. It can have more restrictive policies than network-based IPS.
- C. It can generate alerts based on behavior at the desktop level.
- D. It can be deployed at the perimeter.
- E. It uses signature-based policies.
- F. It works with deployed firewalls.

Answer: A,B,C

- It can view encrypted files
- It can have more restrictive policies than Network-based IPS
- It can generate alerts based on behavior at the desktop level.

Question No : 107

Referencing the CIA model, in which scenario is a hash-only function most appropriate?

- A. securing wireless transmissions.
- B. securing data in files.
- C. securing real-time traffic
- D. securing data at rest

Answer: D

- Securing data at rest

1st
D

Question Referring to CIA (Confidentiality, Integrity, and Availability), where would a hash-only make more sense

- A - Data on File
- B - Data at Rest

1st
B

Question No : 108

Which EAP method uses Protected Access Credentials?

- A. EAP-FAST
- B. EAP-TLS
- C. EAP-PEAP
- D. EAP-GTC

Answer: A

- EAP-FAST

Question No : 109

What is a reason for an organization to deploy a personal firewall?

- A. To protect endpoints such as desktops from malicious activity.
- B. To protect one virtual network segment from another.
- C. To determine whether a host meets minimum security posture requirements.
- D. To create a separate, non-persistent virtual environment that can be destroyed after a session.
- E. To protect the network from DoS and syn-flood attacks.

Answer: A

Layer 3 is a small piece of software on personal firewall that controls the traffic that passes through Layer 4 to the end point user from malicious.

Question No : 110

Which type of security control is defense in depth?

- A. Threat mitigation
- B. Risk analysis
- C. Botnet mitigation
- D. Overt and covert channels

Answer: A

- threat mitigation

Question No : 111

In what type of attack does an attacker virtually change a device's burned-in address in an attempt to circumvent access lists and mask the device's true identity?

- A. gratuitous ARP
- B. ARP poisoning
- C. IP spoofing
- D. MAC spoofing

Answer: D

ان ال burned-in address هو ال mac address الذي كان
mac spoofing هو attack من خلاله استلم الما
التي في ارسال واستقبال ال packets

Question No : 112

Which tasks is the session management path responsible for? (Choose three.)

- A. Verifying IP checksums
- B. Performing route lookup
- C. Performing session lookup
- D. Allocating NAT translations
- E. Checking TCP sequence numbers
- F. Checking packets against the access list

Answer: B,D,F

ان ال ASA يفحص ال packet من خلال ال access list و من ثم ينفذ ال tasks التي
يتم ال session ال packet ال ال . و لتفقد تلك فانه اول packet
في ال session ال ال ال Session management path
و هو المسؤول عن التالي

- Performing route lookup
- Allocating NAT translation
- Checking packets against the access list

Question No : 113

Which type of Cisco ASA access list entry can be configured to match multiple entries in a single statement?

- A. nested object-class
- B. class-map
- C. extended wildcard matching
- D. object groups

Answer: D

کے لئے ان کے objectgroup میں ان کے لئے علامت کرے
hosts

Question No : 114

Which address block is reserved for locally assigned unique local addresses?

- A. 2002::/16
- B. FD00::/8
- C. 2001::/32
- D. FB00::/8

Answer: B

FD00::/8 is unique local IPv6 address

Question No : 115

Which type of mirroring does SPAN technology perform?

- A. Remote mirroring over Layer 2
- B. Remote mirroring over Layer 3
- C. Local mirroring over Layer 2
- D. Local mirroring over Layer 3

Answer: C

ان ال SPAN يلقب ال layer 2 switch (ports & VLANs)
في نفس ال switch ال layer 2.
Local mirroring over layer 2

اما ال RSPAN فانه يلقب ال layer 2 switch (ports & VLANs)
في switch اخر بعيد ان ال monitored device
ال switch

Question No : 116

What VPN feature allows Internet traffic and local LAN/WAN traffic to use the same network connection?

- A. split tunneling
- B. hairpinning
- C. tunnel mode
- D. transparent mode

Answer: A

- split tunneling

Question No : 117

How can you protect CDP from reconnaissance attacks?

- A. Enable dot1x on all ports that are connected to other switches.
- B. Disable CDP on ports connected to endpoints.
- C. Disable CDP on trunk ports.
- D. Enable dynamic ARP inspection on all untrusted ports.

Answer: B

- Disable CDP on ports connected to endpoints.

tut
B
B
B
B
B

Question No : 118

By which kind of threat is the victim tricked into entering username and password information at a disguised website?

- A. Spoofing
- B. Malware
- C. Spam
- D. Phishing

Answer: D

- phishing

Part 2

Question No : 119

Which statement about college campus is true?

- A. College campus has geographical position.
- B. College campus Hasn't got internet access.
- C. College campus Has multiple subdomains.

D - college campus has very beautiful girls

Answer: A

- college campus has geographical position

tut
A

underlying → sub

Question No : 120

Which statement is a benefit of using Cisco IOS IPS?

- A. It uses the underlying routing infrastructure to provide an additional layer of security.
- B. It works in passive mode so as not to impact traffic flow.
- C. It supports the complete signature database as a Cisco IPS sensor appliance.
- D. The signature database is tied closely with the Cisco IOS image.

Answer: A

- It uses underlying routing infrastructure to provide an additional layer of security

~~center~~

Question No : 121

After reloading a router, you issue the dir command to verify the installation and observe that the image file appears to be missing. For what reason could the image file fail to appear in the dir output?

- A. The secure boot-image command is configured.
- B. The secure boot-comfit command is configured.
- C. The confreg 0x24 command is configured.
- D. The reload command was issued from ROMMON.

Answer: A

#secure boot-image

this command enables or disables the securing of the running CISCO IOS image.
because this command has the effect of "hiding" the running image.

Question No : 122

Which statement about zone-based firewall configuration is true?

- A. Traffic is implicitly denied by default between interfaces the same zone
- B. Traffic that is destined to or sourced from the self-zone is denied by default
- C. The zone must be configured before a can be assigned
- D. You can assign an interface to more than one interface

Answer: C

- the zone must be configured before a can be assigned

for

C ← is a

C

C

Question No : 123

Which firewall configuration must you perform to allow traffic to flow in both directions between two zones?

- A. You must configure two zone pairs, one for each direction.
- B. You can configure a single zone pair that allows bidirectional traffic flows for any zone.
- C. You can configure a single zone pair that allows bidirectional traffic flows for any zone except the self zone.
- D. You can configure a single zone pair that allows bidirectional traffic flows only if the source zone is the less secure zone.

Answer: A

outside zone inside zone only 2 zone idni olone

- You must configure two zone pairs, one for each direction.

Question No : 124

A proxy firewall protects against which type of attack?

- A. cross-site scripting attack
- B. worm traffic
- C. port scanning
- D. DDoS attacks

Answer: A



~~port scanning~~

- cross-site scripting attack

eke
A

Question No : 125

What can the SMTP preprocessor in FirePOWER normalize?

- A. It can extract and decode email attachments in client to server traffic.
- B. It can look up the email sender.
- C. It compares known threats to the email sender.
- D. It can forward the SMTP traffic to an email filter server.
- E. It uses the Traffic Anomaly Detector.

Answer: A

- It can extract and decode email attachments in client to server traffic

Question No : 126

Which command help user1 to use enable,disable,exit&etc commands?

- A. catalyst1(config)#username user1 privilege 0 secret us1pass
- B. catalyst1(config)#username user1 privilege 1 secret us1pass
- C. catalyst1(config)#username user1 privilege 2 secret us1pass
- D. catalyst1(config)#username user1 privilege 5 secret us1pass

Answer: A

کے سوا ان لوگوں کے privilege 0، exit، disable، enable

- Catalyst1(config)#username user1 privilege 0 secret us1pass

Question No : 127

Which type of PVLAN port allows hosts in the same VLAN to communicate directly with each other?

- A. community for hosts in the PVLAN
- B. promiscuous for hosts in the PVLAN
- C. isolated for hosts in the PVLAN
- D. span for hosts in the PVLAN

Answer: A

- community for hosts in the PVLAN

* كما نرى ان ال Community ports هي التي تسمح لل Community ports
الاجزاء وال promiscuous port و trunk port

Question No : 128

How to verify that TACACS+ connectivity to a device?

- A. You successfully log in to the device by using the local credentials.
- B. You connect to the device using SSH and receive the login prompt.
- C. You successfully log in to the device by using ACS credentials.
- D. You connect via console port and receive the login prompt.

Answer: B

- You connect to the device using SSH and receive the login prompt

tuJ
B

Question No : 129

Which Cisco product can help mitigate web-based attacks within a network?

- A. Adaptive Security Appliance
- B. Web Security Appliance
- C. Email Security Appliance
- D. Identity Services Engine

Answer: B

- Web security Appliance used to mitigate web-based attacks

Question No : 130

what causes a client to be placed in a guest or restricted VLAN on an 802.1x enabled network?

- A. client entered wrong credentials multiple times.
- B. client entered wrong credentials First time.

Answer: A

- Client entered wrong credential multiple times

like restricted VLAN ^{guest VLAN} ~~restricted VLAN~~ if client enters
wrong credentials multiple times

that
A
A

Question No : 131

If a switch port goes into a blocked state only when a superior BPDU is received, what mechanism must be in use?

- A. STP root guard
- B. EtherChannel guard
- C. loop guard
- D. STP BPDU guard

Answer: A

- STP root guard

fact

A
A
A ← G500
A

Question No : 132

Which filter uses in Web reputation to prevent from Web Based Attacks? (Choose two)

- A. outbreak filter
- B. buffer overflow filter
- C. bayesian overflow filter
- D. web reputation
- E. exploit filtering

Answer: A, D

eke

- outbreak filter

~~buffer overflow filter~~

- exploit filtering

fact

A E
A E
A E

Question No : 133

What technology can you use to provide data confidentiality, data integrity and data origin Authentication on your network?

- A. Certificate Authority
- B. IKE
- C. IPSec
- D. Data Encryption Standards

Answer: C

IPsec can provide confidentiality, integrity, authentication

Question No : 134

What is an advantage of placing an IPS on the inside of a network?

- A. It can provide higher throughput.
- B. It receives traffic that has already been filtered.
- C. It receives every inbound packet.
- D. It can provide greater security.

Answer: B

- It receives traffic that has already been filtered

کما کہ ان IPS کے پاس data کا filtering ہے Firewall کے بعد
- Firewall کے بعد ہی یہ deep inspection کرتا ہے
اس لیے ان IPS کے پاس traffic پہلے ہی سے filtering ہوا ہے
ان Firewall کے

Question No : 135

Which line in the following OSPF configuration will not be required for MD5 authentication to work?

```
interface GigabitEthernet0/1
ip address 192.168.10.1 255.255.255.0
ip ospf authentication message-digest
ip ospf message-digest-key 1 md5 CCNA
!
router ospf 65000
router-id 192.168.10.1
area 20 authentication message-digest
network 10.1.1.0 0.0.0.255 area 10
network 192.168.10.0 0.0.0.255 area 0
```

- A. ip ospf authentication message-digest
- B. network 192.168.10.0 0.0.0.255 area 0
- C. area 20 authentication message-digest
- D. ip ospf message-digest-key 1 md5 CCNA

Answer: C

- area 20 authentication message-digest

Question No : 136

Which security measures can protect the control plane of a Cisco router? (Choose two.)

- A. CCPr
- B. Parser views
- C. Access control lists
- D. Port security
- E. CoPP

Answer: A,E

- CCPr
- CoPP

⊕ Control plane Policing (CoPP): you can configure this as a filter for any traffic destined to an IP address on the router itself.

⊕ Control plane protection (CPP): this allows for a more detailed classification of traffic (more than CoPP)

Question No : 137

In the router ospf 200, what does the value 200 stand for?

- A. process ID
- B. area ID
- C. administrative distance value
- D. ABR ID

Answer: A

- process ID

Question No : 138

Which option describes information that must be considered when you apply an access list to a physical interface?

- A. Protocol used for filtering
- B. Direction of the access class
- C. Direction of the access group
- D. Direction of the access list

Answer: C

- Direction of the access group

Router(config)# ip access-group [Acl No.] IN/out

Question No : 139

What is a possible reason for the error message? Router(config)#aaa server?% Unrecognized command

- A. The command syntax requires a space after the word "server"
- B. The command is invalid on the target device
- C. The router is already running the latest operating system
- D. The router is a new device on which the aaa new-model command must be applied before continuing

Answer: D

يعني ان نكتب aaa new-model في الراوتر يجب ان يكون الراوتر في وضع aaa new-model

- the router is a new device on which the aaa new-model command must be applied before continuing

Question No : 140

What is the actual IOS privilege level of User Exec mode?

- A. 1
- B. 0
- C. 5
- D. 15

Answer: A

1
A

By default, the Cisco software command-line interface (CLI) has two levels of access commands

- user EXEC mode (Level 1)
- privilege EXEC mode (Level 15)

Question No : 141

With Cisco IOS zone-based policy firewall, by default, which three types of traffic are permitted by the router when some of the router interfaces are assigned to a zone? (Choose three.)

- A. traffic flowing between a zone member interface and any interface that is not a zone member
- B. traffic flowing to and from the router interfaces (the self zone)
- C. traffic flowing among the interfaces that are members of the same zone
- D. traffic flowing among the interfaces that are not assigned to any zone
- E. traffic flowing between a zone member interface and another interface that belongs in a different zone
- F. traffic flowing to the zone member interface that is returned traffic

Answer: B,C,D

- traffic flowing to and from the router interfaces (the self zone).
- traffic flowing among the interfaces that are members of the same zone
- traffic flowing among the interfaces that are not assigned by any zone.

Question No : 142

Which of the following pairs of statements is true in terms of configuring MD authentication?

- A. Interface statements (OSPF, EIGRP) must be configured; use of key chain in OSPF
- B. Router process (OSPF, EIGRP) must be configured; key chain in EIGRP
- C. Router process (only for OSPF) must be configured; key chain in EIGRP
- D. Router process (only for OSPF) must be configured; key chain in OSPF
- E. Router process or interface statement for ospf must be configured; key chain in EIGRP

Answer: C & E

- Router process (only for OSPF) must be configured; key chain in EIGRP
- Router process or interface statement for ospf must be configured; key chain in EIGRP

full

CE, E (Choose two) MD authentication

نفس سوال سابق

Question No : 143

What encryption technology has broadest platform support

- A. hardware
- B. middleware
- C. Software
- D. File level

Answer: C

- Software

Question No : 144

What is the Cisco preferred countermeasure to mitigate CAM overflows?

- A. Port security
- B. Dynamic port security
- C. IP source guard
- D. Root guard

Answer: B

تد
B
B

كما نرى ان الـ CAM overflows (هو ان يقوم الـ attacker بـ ارسال العديد من الـ packets وكل packet له Source mac address مختلف لذلك سوف يمتلئ الـ mac address table .

لذلك هذا النوع من الـ attack يتم بواسطة الـ Dynamic port security

Question No : 145

Which statement about communication over failover interfaces is true?

- A. All information that is sent over the failover and stateful failover interfaces is sent as clear text by default.
- B. All information that is sent over the failover interface is sent as clear text, but the stateful failover link is encrypted by default.
- C. All information that is sent over the failover and stateful failover interfaces is encrypted by default.
- D. User names, passwords, and preshared keys are encrypted by default when they are sent over the failover and stateful failover interfaces, but other information is sent as clear text.

Answer: A

- All information that is sent over the failover and stateful failover interfaces is sent as clear text by default

Question No : 146

Which option is a weakness in an information system that an attacker might leverage to gain unauthorized access to the system or its data?

- A. hack
- B. mitigation
- C. risk
- D. vulnerability
- E. exploit

Answer: D

- Vulnerability

ان ال attacker ممكن ان يستخدم الثغرة في System ال ليحصل
دخول غير مصرح له في System ال

Question No : 147

What is the effect of the ASA command `crypto isakmp nat-traversal`?

- A. It opens port 4500 only on the outside interface.
- B. It opens port 500 only on the inside interface.
- C. It opens port 500 only on the outside interface.
- D. It opens port 4500 on all interfaces that are IPSec enabled.

Answer: D

- It opens port 4500 on all interfaces that are IPSec enabled

tut
D
D ← given

Question No : 148

The first layer of defense which provides real-time preventive solutions against malicious traffic is provided by?

- A. Banyan Filters
- B. Explicit Filters
- C. Outbreak Filters

Answer: C

Outbreak Filters

Question No : 149

What is the only permitted operation for processing multicast traffic on zone-based firewalls?

- A. Only control plane policing can protect the control plane against multicast traffic.
- B. Stateful inspection of multicast traffic is supported only for the self-zone.
- C. Stateful inspection for multicast traffic is supported only between the self-zone and the internal zone.
- D. Stateful inspection of multicast traffic is supported only for the internal zone.

Answer: A

- only control plane Policing can protect the control plane against Multicast traffic

Question No : 150

What is true about the Cisco IOS Resilient Configuration feature?

- A. The feature can be disabled through a remote session
- B. There is additional space required to secure the primary Cisco IOS Image file
- C. The feature automatically detects image and configuration version mismatch
- D. Remote storage is used for securing files

Answer: C

- the feature automatically detects image and configuration version mismatch

tut
C ← Cisco

Q. which two statements about self zone on Cisco Based Firewall are true (choose two)

- A - more than one interface can be assigned to the same zone
- B - only one interface can be in a given zone
- C - An interface can only be in one zone
- D - An interface can be a member of multiple zones
- E - Every device interface must be a member of a zone

Answer A C

- more than one interface can be assigned to ^{the} AC the same zone
- An interface can only be in one zone
only zone ~~is assigned to each interface~~

Question No : 151

Which two statements about the self zone on a Cisco zone-based policy firewall are true?
(Choose Two)

- A. Multiple interfaces can be assigned to the self zone.
- B. Traffic entering the self zone must match a rule.
- C. Zone pairs that include the self zone apply to traffic transiting the device.
- D. It can be either the source zone or the destination zone.
- E. It supports stateful inspection for multicast traffic.

Answer: D, E

Answer AD

- It can be either the source zone or the destination zone.
- ~~It supports stateful inspection for multicast traffic.~~
- multiple interfaces can be assigned to the self zone

ful

~~AD~~

AD

AD

AD

~~AD~~

Question No : 152

Which technology can be used to rate data fidelity and to provide an authenticated hash for data?

- A. file reputation
- B. file analysis
- C. signature updates
- D. network blocking

Answer: A

- file reputation

ful

A → Cisco

A

Question No : 153

What type of packet creates and performs network operations on a network device?

- A. control plane packets
- B. data plane packets
- C. management plane packets
- D. services plane packets

Answer: A

- control plane packets

انواع الحزم التي ينفذ بها عمليات الشبكة : control plane packets
التي هي update packets

Question No : 154

When is the best time to perform an anti-virus signature update?

- A. Every time a new update is available.
- B. When the local scanner has detected a new virus.
- C. When a new virus is discovered in the wild.
- D. When the system detects a browser hook.

Answer: A

- Every time a new update is available

Question No : 155

What command can you use to verify the binding table status?

- A. show ip dhcp snooping database
- B. show ip dhcp snooping binding
- C. show ip dhcp snooping statistics
- D. show ip dhcp pool
- E. show ip dhcp source binding
- F. show ip dhcp snooping

Answer: A

Show ip dhcp snooping database

tut
A

Question No : 156

What security feature allows a private IP address to access the Internet by translating it to a public address?

- A. NAT
- B. hairpinning
- C. Trusted Network Detection
- D. Certification Authority

Answer: A

Question No : 157

Which command will configure a Cisco ASA firewall to authenticate users when they enter the enable syntax using the local database with no fallback method?

- A. aaa authentication enable console LOCAL SERVER_GROUP
- B. aaa authentication enable console SERVER_GROUP LOCAL
- C. aaa authentication enable console local
- D. aaa authentication enable console LOCAL

Answer: D

الامر الذي يتم به authentication لا users عن خلال ال local database ويكون ال قائمة بهذا ت افرق في حالة الفشل

aaa authentication enable console LOCAL

كاشية ان ال LOCAL متوفرة ب الكايد لـ

Question No : 158

You are the security administrator for a large enterprise network with many remote locations. You have been given the assignment to deploy a Cisco IPS solution.

Where in the network would be the best place to deploy Cisco IOS IPS?

- A. Inside the firewall of the corporate headquarters Internet connection
- B. At the entry point into the data center
- C. Outside the firewall of the corporate headquarters Internet connection
- D. At remote branch offices

Answer: D

- At remote branch offices

كما نعلم اننا نضع ال IPS بعد ال Firewall لـ IPS لـ deep inspection
اكتشف ال Firewall ان ال IPS ان يتصفح ببطء الشبكة. لذلك فان ال
مكان لوضع ال IPS في ال remote branch office

Question No : 159

The stealing of confidential information of a company comes under the scope of:

- A. Reconnaissance
- B. Spoofing attack
- C. Social Engineering
- D. Denial of Service

Answer: C

- Social Engineering

كما نعلم ان Social Engineering هو ان يعمل شخص بشركة معينة ويريد
انه يكتسب المعلومات للشركات لوضع حلول لمشاكل الشبكة. لذلك سوف يأتينا
بمعلومات عن الشبكة على الشركة المستهدفة. ولم استخدام هذه المعلومات
في نوع attack اخر

لنستعرض سؤال 160

Question No : 160

What are two uses of SIEM software? (Choose two.)

- A. collecting and archiving syslog data
- B. alerting administrators to security events in real time
- C. performing automatic network audits
- D. configuring firewall and IDS devices
- E. scanning email for suspicious attachments

Answer: A,B

4u1
AB

- collecting and archiving syslog data
- alerting administrator to security events in real time

Question 164

Which two functions can SIEM provide? (Choose two)

- A correlation between logs and events from multiple systems
- B - Proactive malware analysis to block malicious activity

Question No : 161

What do you use when you have a network object or group and want to use an IP address?

- A. Static NAT
- B. Dynamic NAT
- C. identity NAT
- D. Static PAT

Answer: B

- Dynamic NAT

جوابي سليم ~~Static NAT~~

في L Answer

Question No : 162

Which 2 NAT type allows only objects or groups to reference an IP address?

- A. dynamic NAT
- B. dynamic PAT
- C. static NAT
- D. identity NAT

Answer: A,C

- dynamic NAT

- static NAT

Ⓢ ملاحظة اذا قلنا نوع واحد من NAT فنستخدم ال Dynamic NAT
او اختيار واحد فقط (static)

Question No : 163

Which type of address translation should be used when a Cisco ASA is in transparent mode?

- A. Static NAT
- B. Dynamic NAT
- C. Overload
- D. Dynamic PAT

Answer: A

عندما يكون ال ASA في ال transparent mode فإنه لا يستخدم ال Static NAT
لأن ال Static NAT يستخدم ال IP address

Question No : 164

Which protocol provides security to Secure Copy?

- A. IPsec
- B. SSH
- C. HTTPS
- D. ESP

Answer: B

- SSH

The SCP is a network protocol which supports file transfers between hosts on a network. SCP uses Secure Shell (SSH) for data transfer and uses same mechanism for authentication.

Question No : 164

Which protocol provides security to Secure Copy?

- E. IPsec
- F. SSH
- G. HTTPS
- H. ESP

Answer: B

Question No : 165

What is the FirePOWER impact flag used for?

- A. A value that indicates the potential severity of an attack.
- B. A value that the administrator assigns to each signature.
- C. A value that sets the priority of a signature.
- D. A value that measures the application awareness.

Answer: A

attack it is severity impact flag 1111

- A value that indicates the potential severity of an attack

Question No : 166

Which Source fire event action should you choose if you want to block only malicious traffic from a particular end user?

- A. Allow with inspection
- B. Allow without inspection
- C. Block
- D. Trust
- E. Monitor

Answer: A

- Allow with inspection

Question No : 167

Which network device does NTP authenticate?

- A. Only the time source
- B. Only the client device
- C. The firewall and the client device
- D. The client device and the time source

Answer: A

- only the time source

Source time لا authenticates NTP server

فقط NTP فان لا
المصادقة

Question No : 168

Which type of encryption technology has the broadcast platform support?

- A. Middleware
- B. Hardware
- C. Software
- D. File-level

Answer: C

- Software

Question No : 169

Refer to the exhibit.

```
209.114.111.1 configured, ipv4, sane, valid, stratum 2
ref ID 132.163.4.103 , time D7AD124D.9D6FC57E (03:17:33.614 UTC Sun Aug 31 2014)
our mode client, peer mode server, our poll intvl 64, peer poll intvl 64
root delay 46.34 msec, root disp 23.52, reach 1, sync dist 268.59
delay 63.27 msec, offset 7.9817 msec, dispersion 187.56, jitter 2.07 msec
precision 3**23, version 4
```

```
204.2.134.164 configured, ipv4, sane, valid, stratum 2
ref ID 241.199.164.101, time D7AD1419.5E85272B (03:25:13.619 UTC Sun Aug 31 2014)
our mode client, peer mode server, our poll intvl 64, peer poll intvl 256
root delay 30.83 msec, root disp 4.88, reach 1, sync dist 223.80
delay 28.69 msec, offset 6.4331 msec, dispersion 187.55, jitter 1.39 msec
precision 2**20, version 4
```

```
192.168.10.7 configured, ipv4, our_master, sane, valid, stratum 3
ref ID 108.61.73.243 , time D7AD0D8F.AE79A23A (02:57:19.681 UTC Sun Aug 31 2014)
our mode client, peer mode server, our poll intvl 64, peer poll intvl 64
root delay 86.45 msec, root disp 87.82, reach 377, sync dist 134.25
delay 0.89 msec, offset 19.5057 msec, dispersion 1.69, jitter 0.84 msec
precision 2**32, version 4
```

With which NTP server has the router synchronized?

- A. 192.168.10.7
- B. 108.61.73.243
- C. 209.114.111.1
- D. 132.163.4.103
- E. 204.2.134.164
- F. 241.199.164.101

Answer: A

الإجابة هي A Show ntp association details في output

- configured :- this NTP clock source has been configured to be a server

- our master :- this local client is synchronized to this peer

192.168.10.7 ← IP address الـ NTP Server

Question No : 170

which term best describes the concept of preventing the modification of data in transit and in storage?

- A. Confidentiality
- B. Integrity
- C. Availability
- D. fidelity

Answer: B

- Integrity

كما نعلم ان Integrity تعني ان البيانات تبقى ان البيانات بعد ان ابلستم بدون
اي تغيير. اي لم يتم عمل تعديلات على البيانات عند ارسالها خلال
الانترنت او الشبكة بصورة عامة

Question No : 171


Which actions can a promiscuous IPS take to mitigate an attack? (Choose three.)

- A. Modifying packets
- B. Requesting connection blocking
- C. Denying packets
- D. Resetting the TCP connection
- E. Requesting host blocking
- F. Denying frames

Answer: B,D,E

Ans
B, D, E

- Requesting connection blocking
- Resetting the TCP connection
- Requesting host blocking

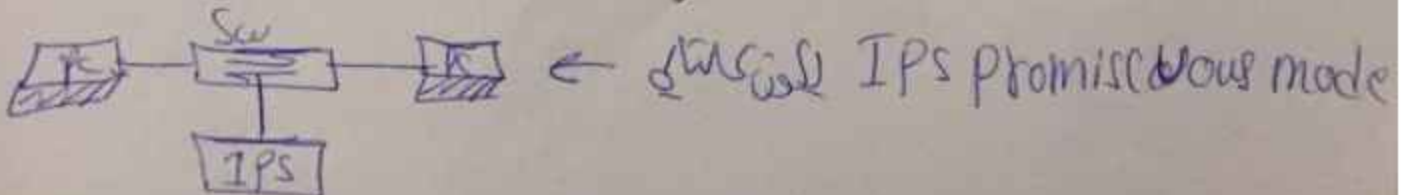

سوال 2

Question No : 172

dst	src	state	conn-id	slot
10.10.10.2	10.1.1.5	QM_IDLE	1	0

While troubleshooting site-to-site VPN, you issued the show crypto isakmp sa command. What does the given output show?

- A. IPsec Phase 1 is established between 10.10.10.2 and 10.1.1.5.
- B. IPsec Phase 2 is established between 10.10.10.2 and 10.1.1.5.
- C. IPsec Phase 1 is down due to a QM_IDLE state.
- D. IPsec Phase 2 is down due to a QM_IDLE state.

Answer: A

Question No : 174

For what reason would you configure multiple security contexts on the ASA firewall?

- A. To separate different departments and business units.
- B. To enable the use of VRFs on routers that are adjacently connected.
- C. To provide redundancy and high availability within the organization.
- D. To enable the use of multicast routing and QoS through the firewall.

Answer: A

-To separate different departments and business units.

نفس السؤال السابق

Question No : 175

Which statement about personal firewalls is true?

- A. They can protect a system by denying probing requests.
- B. They are resilient against kernel attacks.
- C. They can protect email messages and private documents in a similar way to a VPN.
- D. They can protect the network against attacks.

Answer: A

~~They can protect the network against attacks.~~

ان firewall الشخصي يحمي النظام من probing requests attack

Question 109

What is a reason for an organization to deploy a personal firewall - to protect endpoints such as desktop from malicious activity

Question No : 176

Which command do you enter to enable authentication for OSPF on an interface?

- A. router(config-if)#ip ospf message-digest-key 1 md5 CISCOPASS
- B. router(config-router)#area 0 authentication message-digest
- C. router(config-router)#ip ospf authentication-key CISCOPASS
- D. router(config-if)#ip ospf authentication message-digest

Answer: D

router(config-if) # IP ospf authentication message-digest

tut
D

Question No : 177

Which two actions can a zone-based firewall take when looking at traffic? (Choose two)

- A. Filter
- B. Forward
- C. Drop
- D. Broadcast
- E. Inspect

Answer: C,E

- Drop
- Inspect

fact
CE ← C
CE

Question No : 178

Refer to the below.

Router# debug tacacs

```
14:00:09: TAC+: Opening TCP/IP connection to 192.168.60.15 using source
10.116.0.79
14:00:09: TAC+: Sending TCP/IP packet number 383258052-1 to 192.168.60.15
(AUTHEN/START)
14:00:09: TAC+: Receiving TCP/IP packet number 383258052-2 from 192.168.60.15
14:00:09: TAC+ (383258052): received authen response status = GETUSER
14:00:10: TAC+: send AUTHEN/CONT packet
14:00:10: TAC+: Sending TCP/IP packet number 383258052-3 to 192.168.60.15
(AUTHEN/CONT)
14:00:10: TAC+: Receiving TCP/IP packet number 383258052-4 from 192.168.60.15
14:00:10: TAC+ (383258052): received authen response status = GETPASS
14:00:14: TAC+: send AUTHEN/CONT packet
14:00:14: TAC+: Sending TCP/IP packet number 383258052-5 to 192.168.60.15
(AUTHEN/CONT)
14:00:14: TAC+: Receiving TCP/IP packet number 383258052-6 from 192.168.60.15
14:00:14: TAC+ (383258052): received authen response status = PASS
14:00:14: TAC+: Closing TCP/IP connection to 192.168.60.15
```

Which statement about this debug output is true?

- A. The requesting authentication request came from username GETUSER.
- B. The TACACS+ authentication request came from a valid user.
- C. The TACACS+ authentication request passed, but for some reason the user's connection was closed immediately.
- D. The initiating connection request was being spoofed by a different source address.

Answer: B

PASS = received authen response status | ان |

☺☺

- the TACACS+ authentication request came from a valid user

Question No : 179

When an IPS detects an attack, which action can the IPS take to prevent the attack from spreading?

- A. Deny the connection inline.
- B. Perform a Layer 6 reset.
- C. Deploy an antimalware system.
- D. Enable bypass mode.

Answer: A

Deny connection inline :- this action terminates the packet that triggered the action and future packets that are part of the same TCP connection.

Question No : 180

Which command is needed to enable SSH support on a Cisco Router?

- A. crypto key lock rsa
- B. crypto key generate rsa
- C. crypto key zeroize rsa
- D. crypto key unlock rsa

Answer: B

- crypto key generate rsa

Question No : 181

Which Cisco feature can help mitigate spoofing attacks by verifying symmetry of the traffic path?

- A. Unidirectional Link Detection
- B. Unicast Reverse Path Forwarding
- C. TrustSec
- D. IP Source Guard

Answer: B

- Unicast Reverse Path Forwarding (uRPF)

جواب السؤال
هو B

Question No : 182

What does the command `crypto isakmp nat-traversal` do?

- A. Enables udp port 4500 on all IPsec enabled interfaces
- B. rebooting the ASA the global command

Answer: A

- Enables UDP port 4500 on all IPsec enabled interfaces

Question 147

What is the effect of ASA command `crypto isakmp nat-traversal`

A It opens port 4500 on all interfaces that are IPsec enabled

تد
A

Question No : 183

How does a device on a network using ISE receive its digital certificate during the new- device registration process?

- A. ISE acts as a SCEP proxy to enable the device to receive a certificate from a central CA server.
- B. ISE issues a certificate from its internal CA server.
- C. ISE issues a pre-defined certificate from a local database.
- D. The device requests a new certificate directly from a central CA.

Answer: A

- ISE acts as SCEP proxy to enable the device to receive a certificate from a central CA server.

106
سؤال 106
Question No : 184

Which three statements about host-based IPS are true? (Choose three.)

- A. It can view encrypted files.
- B. It can have more restrictive policies than network-based IPS.
- C. It can generate alerts based on behaviour at the desktop level.
- D. It can be deployed at the perimeter.
- E. It uses signature-based policies.
- F. It works with deployed firewalls.

Answer: A,B,C

